

# MANAGEMENT OF INFORMATION SYSTEMS

BME VIK TMIT  
SOFTWARE ENGINEERING, BSc



BME VIK TMIT

# MANAGEMENT OF INFORMATION SYSTEMS

Dr Gusztáv Adamis  
adamis@tmit.bme.hu

BME VIK TMIT



BME VIK TMIT

# MANAGEMENT OF INFORMATION SYSTEMS

## 3. PROTOCOLS, IP BASICS, NETWORKS



# PART I

## PROTOCOLS, IP BASICS (REFRESHMENT)



# REFRESHMENT

- Reference model, protocols
- IP basics
  - addresses, address classes
  - DHCP
  - ARP/RARP
  - NA(P)T
  - DNS
  - ICMP



# OSI REFERENCE MODEL

- 7 layers
  - Determines the tasks of the protocols used to control the communication among computers
  - Main goal: interoperation between devices of different suppliers
- Every layer uses **ONLY** the services of the layer below and provides service **ONLY** for the layer above
  - Protocol stack
  - SW / HW / combined implementation



Layer	Name		Function
7	Application	DATA	Application protocols, e.g. SMTP (e-mail – Simple Mail Transfer Protocol), HTTP(S) (web), FTP (file transfer)
6	Presentation	DATA	Data presentation, encoding/decoding Data formats (e.g. MPEG), Character coding, compression, encryption
5	Session	DATA	Control of communication sessions (SCP – Session Control Protocol)
4	Transport	DATA SEGMENTS	Data transfer between endpoints, reliability, virtual circuits, paths (e.g. TCP connections, port numbers)
3	Network	PACKETS	Logical addressing (e.g. IP addresses) and routing based upon them ( <b>routers</b> )
2	Data Link	FRAMES	Interface (MAC) level addressing, Flow control, (bit)error detection & correction ( <b>bridge, switch</b> )
1	Physical	BITS	Wire or fiber optic transmission medium among devices ( <b>hub</b> )

# LAYER CHARACTERISTICS

- Every layer uses the service of the underlying layer and offers service(s) to the higher layer
- The Interface between them determines the way of interactions
- Implementation details are hidden
  - Can be changed without an effect on the other layers (black box)
- Examples
  - Network topology and physical configuration/medium
  - Routing
  - Applications
  - New services / applications





# PROTOCOLS

- A module in the layered structure
- Set of rules that controls the communication between network elements
  - Applications, hosts, routers
- A Protocol Specification determines:
  - Interface to the higher layer (API)
  - „Interface” to peer entity
    - Message and parameter formats
      - Static part
    - Activities initiated by messages (Behaviour)
      - Dynamic part



# OSI 1. PHYSICAL LAYER

- Physical and electronic specification of the medium
  - Pin/connector structure
  - Electrical potential level (Volts)
  - Cable specifications, etc.
- Hub, repeater
- Main functions:
  - Physical connection establishment, release
  - Shared access to medium
  - Modulation/demodulation



# OSI 2. DATA LINK LAYER

- Error-free transmission of messages (frames) between two neighbouring nodes
  - Framing
  - Indication and (optionally) correction of physical layer (~bit) errors
  - Hardware addressing (MAC addresses)
- Examples:
  - HDLC, LAPD, Aloha
- Bridge



# OSI 3. NETWORK LAYER

- Transmission of messages between any nodes of the network (possibly through several sub-networks)
  - Routing
  - Congestion control
  - SAR (Segmentation and reassembly)
  - Logical (IP) addressing
  - Traffic-based accounting
- Router



# OSI 4. TRANSPORT LAYER

- Transparent transmission between users
- Connection establishment, reliability control (optionally)
- Virtual connections
- TCP



# OSI 5. SESSION LAYER

- Dialogue management between end-users
  - Timer settings, termination, restart
  - Synchronization
  - Token management
- Actually log-in and log-off to and from the system



# OSI 6. PRESENTATION LAYER

- Ensures the data to be provided in an understandable format for the systems of of the end-users
  - Encoding, decoding
  - Code conversion (e.g. serial-XML)
  - Compressing/decompressing
  - Encryption



# OSI 7. APPLICATION LAYER


- Communication between applications
  - negotiation
    - format
    - Security issues
    - synchronization
- HTTP, SMTP, FTP, Telnet






# OSI – IP ARCHITECTURE


ISO/OSI

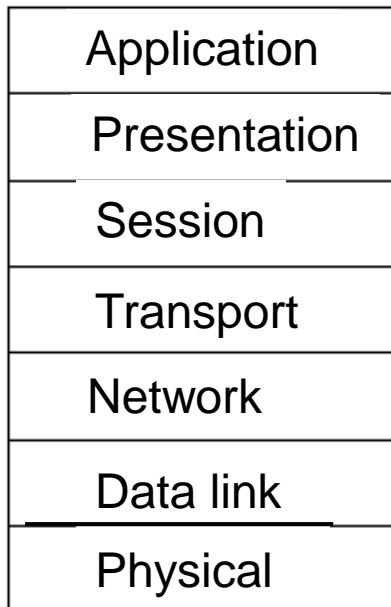

TCP/IP

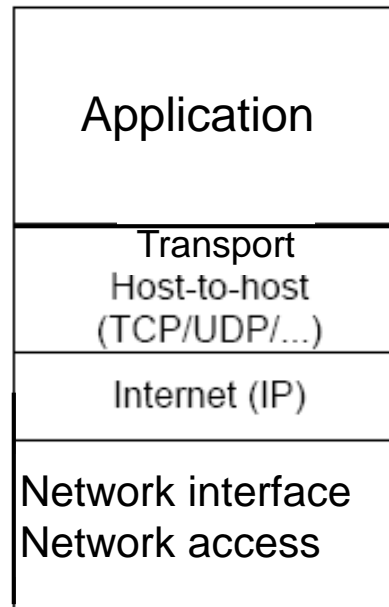

Practical

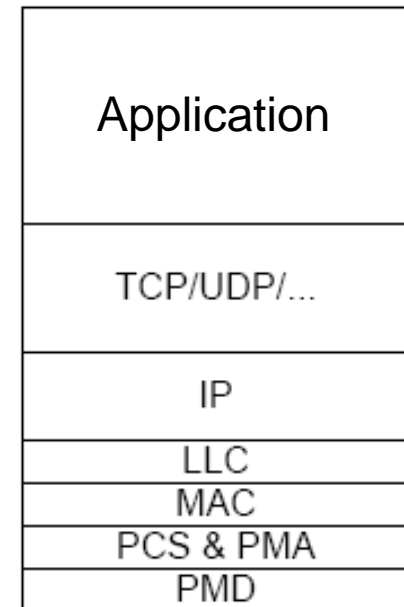

IP: Internet Protocol

TCP: Transmission Control Protocol

UDP: User Datagram Protocol

LLC: Logical Link Control

MAC: Medium Access Control


PCS: Physical Coding Sublayer

PMA: Physical Medium Attachment


PMD: Physical Medium Dependent



# LAYERING

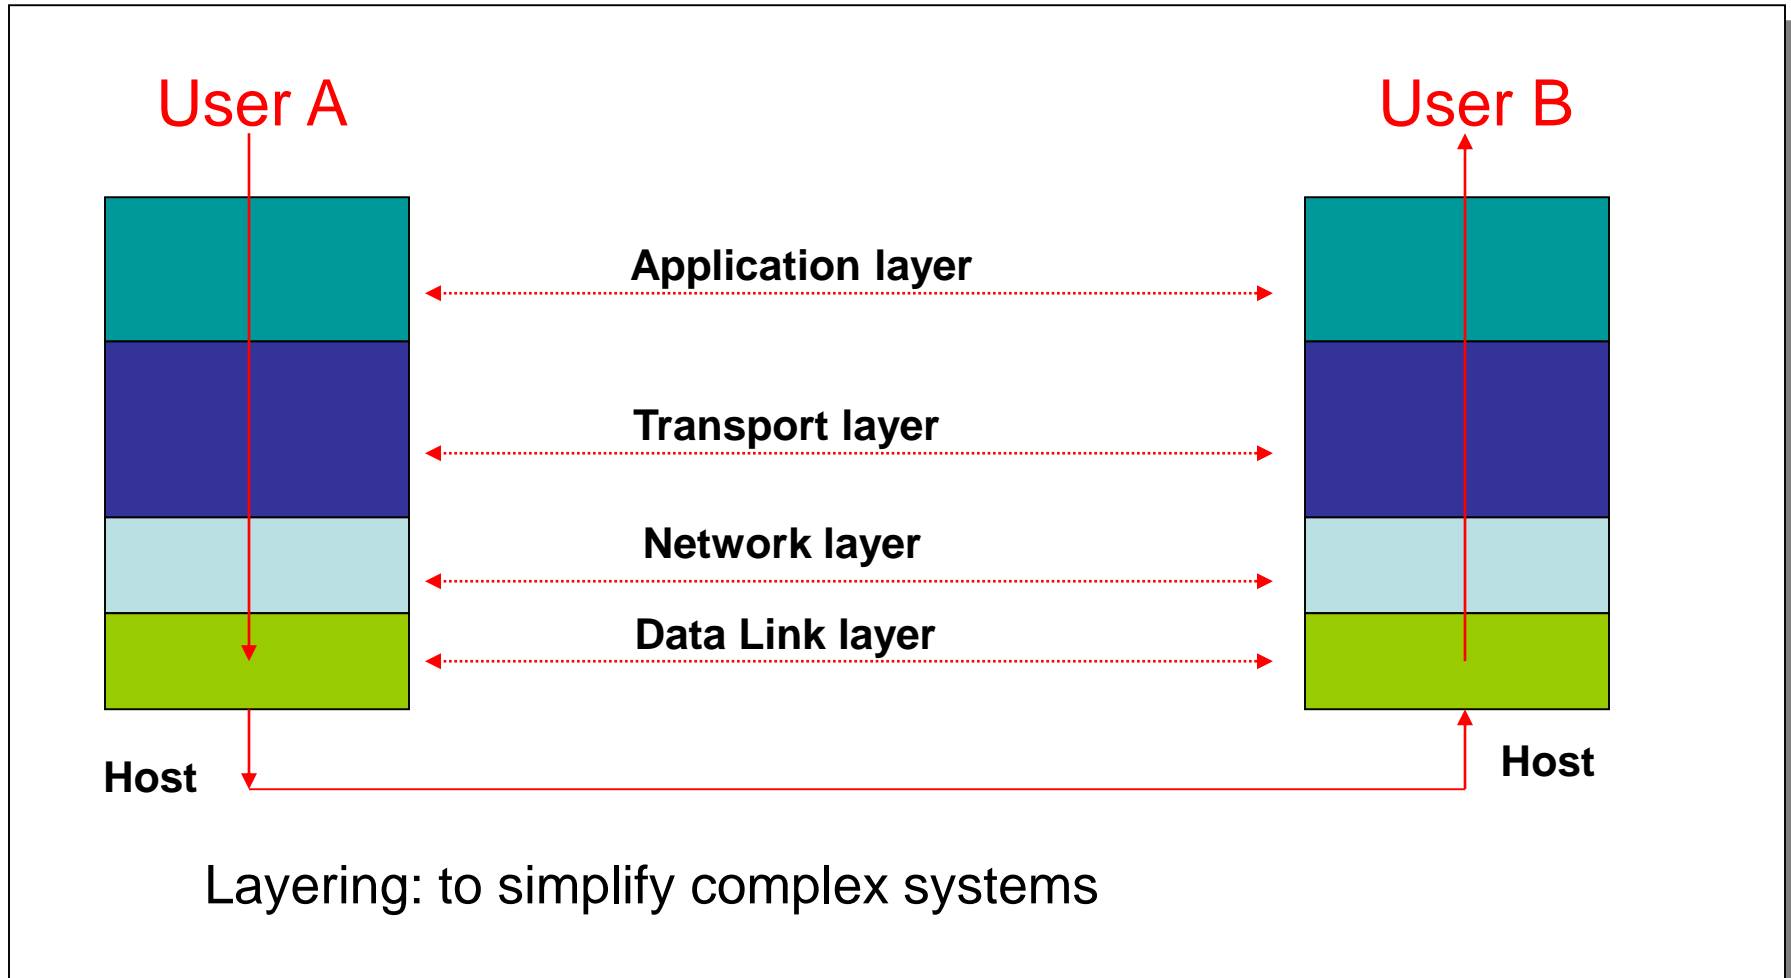


# LAYERING: ENCAPSULATION

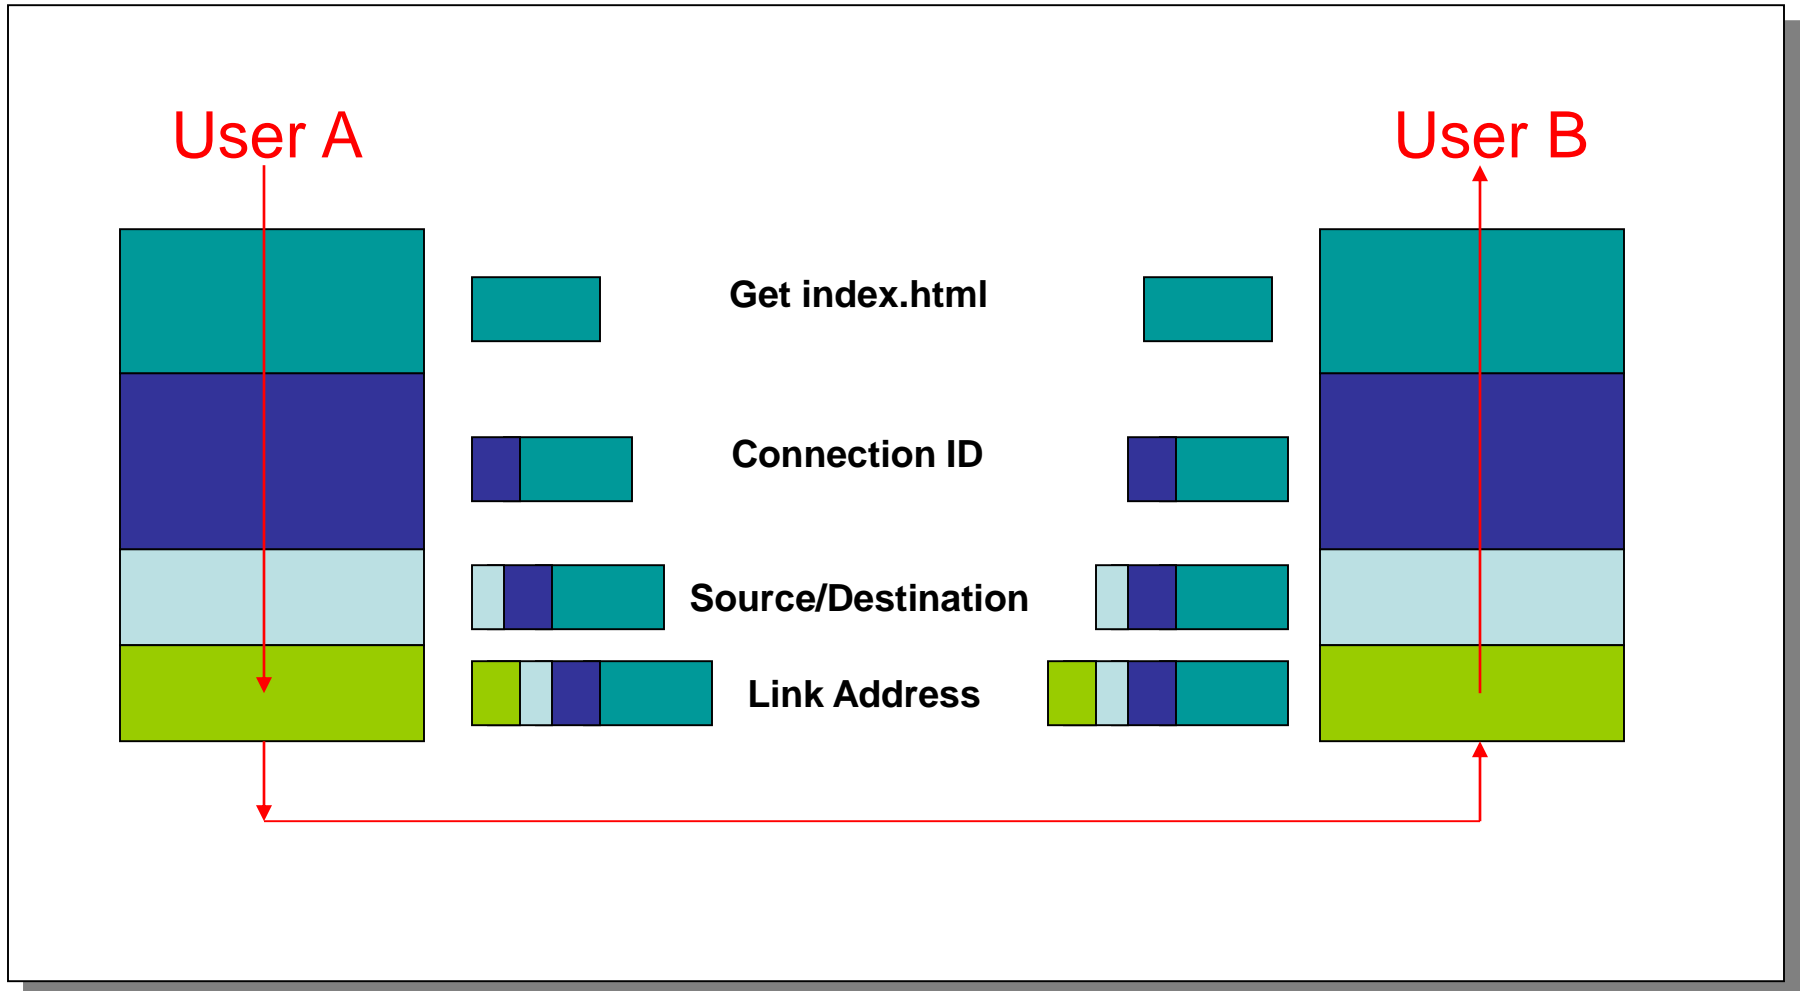

# HUB, BRIDGE, ROUTER, SWITCH

- Hub
  - 1. (physical) layer
  - Broadcast
    - Input signal to all other ports,
    - No signal processing - fast
  - Ethernet with hub
    - Shared medium
      - > collision detecting
      - > waiting for resolving
      - > shared bandwidth
      - > half duplex

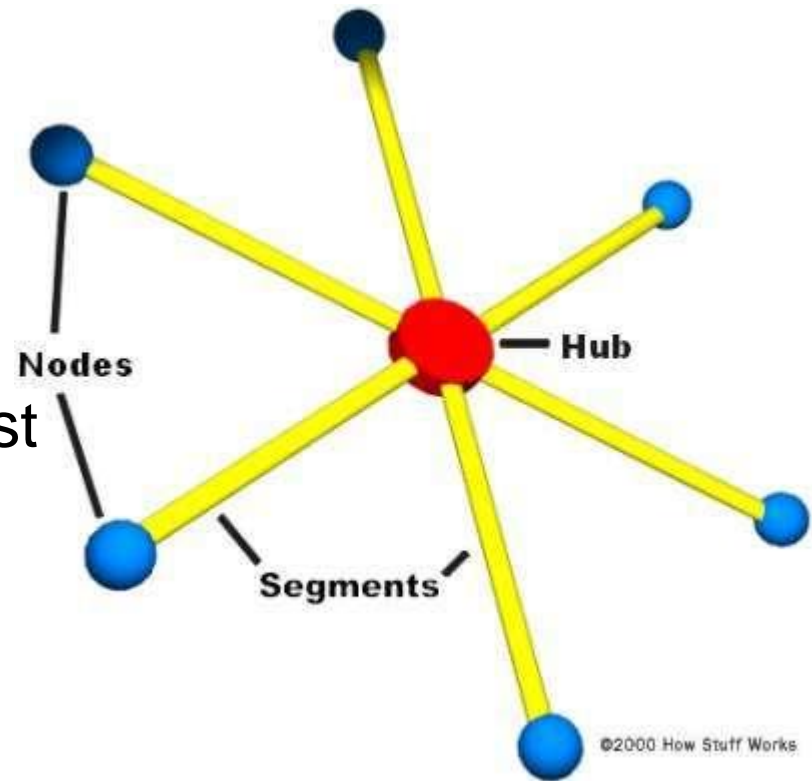

# HUB, BRIDGE, ROUTER, SWITCH

- Bridge
  - 2. (data link) layer
  - Frame analysis, MAC (physical) address based routing
    - No collision, but slower procession
    - Dedicated internal connections
    - Since no broadcasting – multiple connections
      - > Dedicated (full) bandwidth
  - Transparent (adaptive bridges)
  - Source controlled
- But when is the hub better???



# HUB, BRIDGE, ROUTER, SWITCH

- Router
  - 3. (network) layer
  - IP (!! ) address based routing
  - Interconnects two or more IP *subnetworks*
  - Actually a special-purpose mainframe computer




# HUB, BRIDGE, ROUTER, SWITCH

- Switch
  - Commercial phrase
  - Typically used instead of bridge
  - But switches can work in higher layers, too
    - 4. (transport) layer:
      - NAT
      - load sharing based on TCP session
      - stateful firewall
    - 7. (application) layer
      - load sharing based on URL
      - application level transaction management



# PLACES OF THE NETWORK EQUIPMENTS IN A LAYERED STRUCTURE

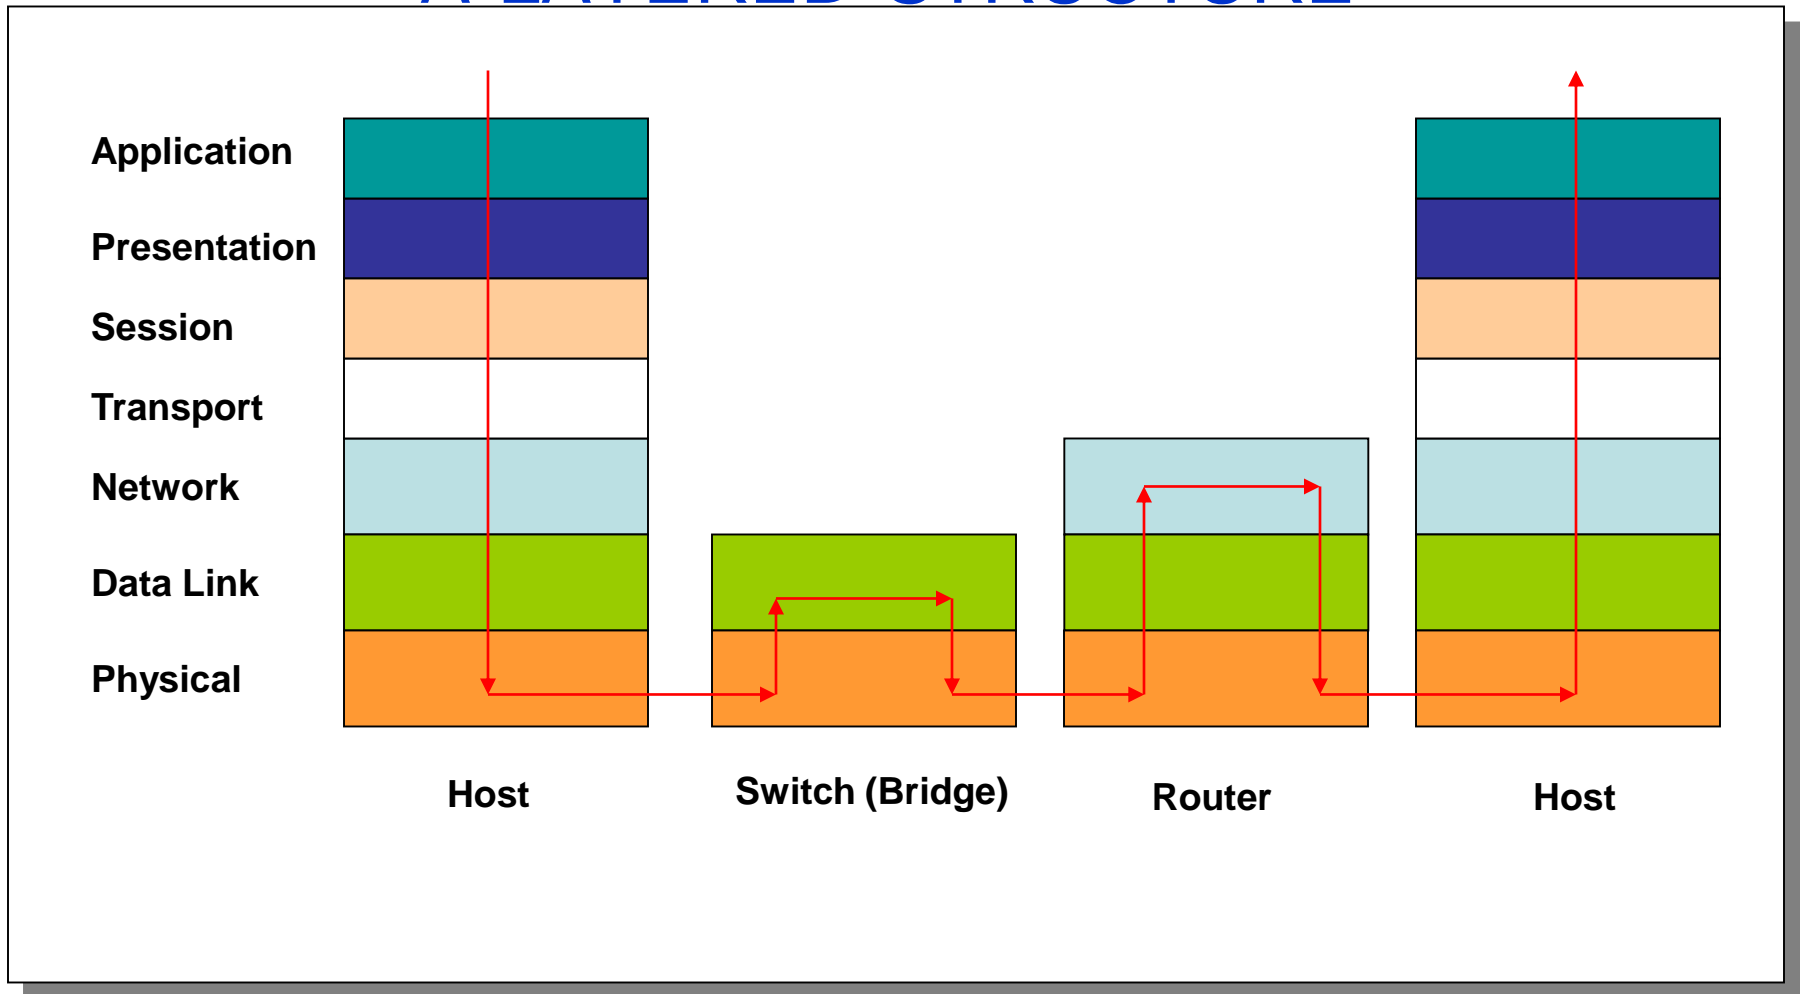



# LAYERING

- Now, is it worth?
  - Mainly yes, but
  - Sometimes...
    - A layer duplicates the functions of an underlying layer (e.g.: error detection and correction),
    - Same piece of information needed in several layers (e.g.: time-stamp, Maximum Transmission Unit - MTU),
    - Price: power (speed, efficiency)




# IP REFRESHMENT

- IP bases
  - Addresses, address classes
  - DHCP
  - ARP/RARP
  - NA(P)T
  - DNS
  - ICMP



# ELEMENTS OF AN IP NETWORK

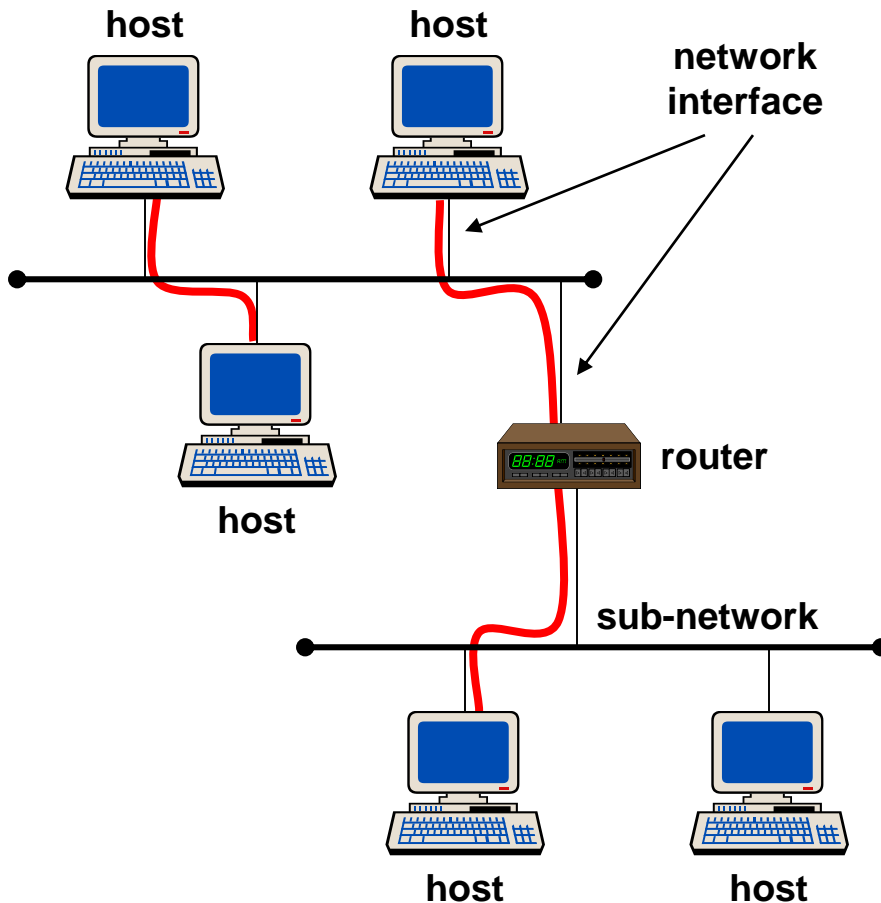


- **Host:** communication endpoint
- **Interface:** connection point of a node to a sub-network
- **Sub-network:** physical network, the connected nodes can communicate directly
- **Router:** transmits the messages between hosts of different sub-networks



# IP ADDRESSES, NETWORKS

- IP address:
  - network address (most significant bits)
  - host address (least significant bits)
- *Network?* (from point of IP)
  - interface with the same network address
  - interconnection without a router between these devices

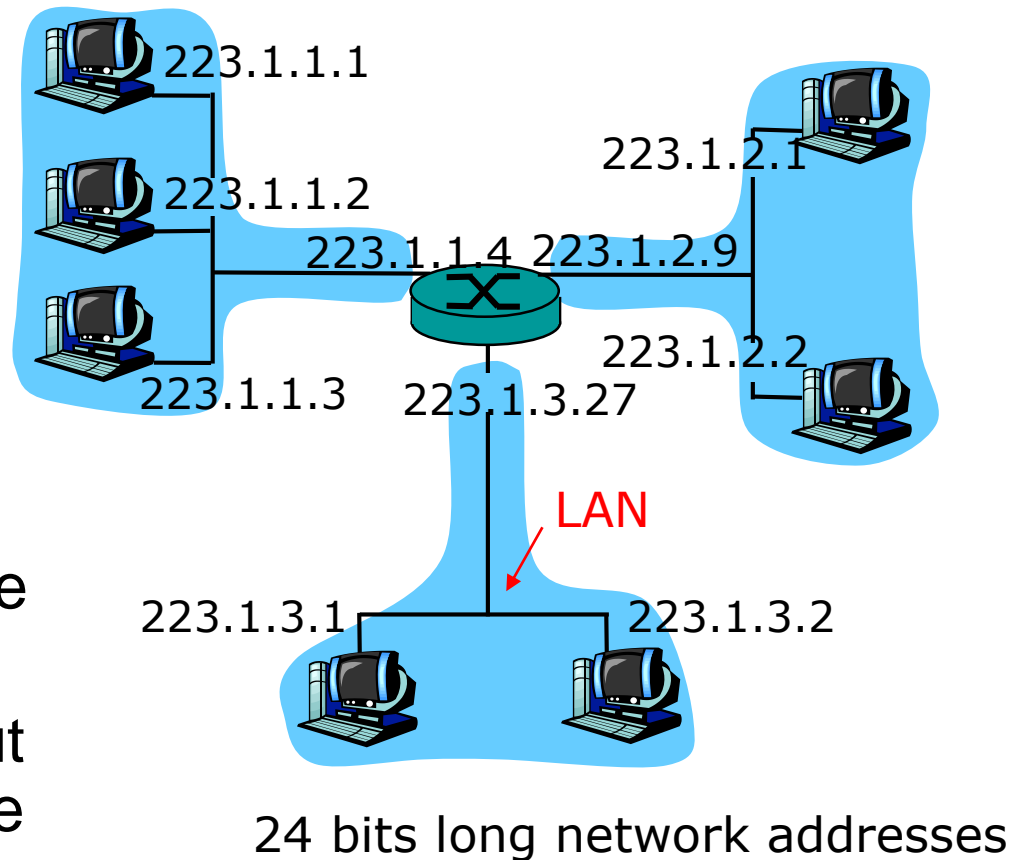


10011000 10000010 11110110 00000010

152      130      246      2



152.130.246.2




dotted decimal notation



# IP ADDRESS CLASSES

class

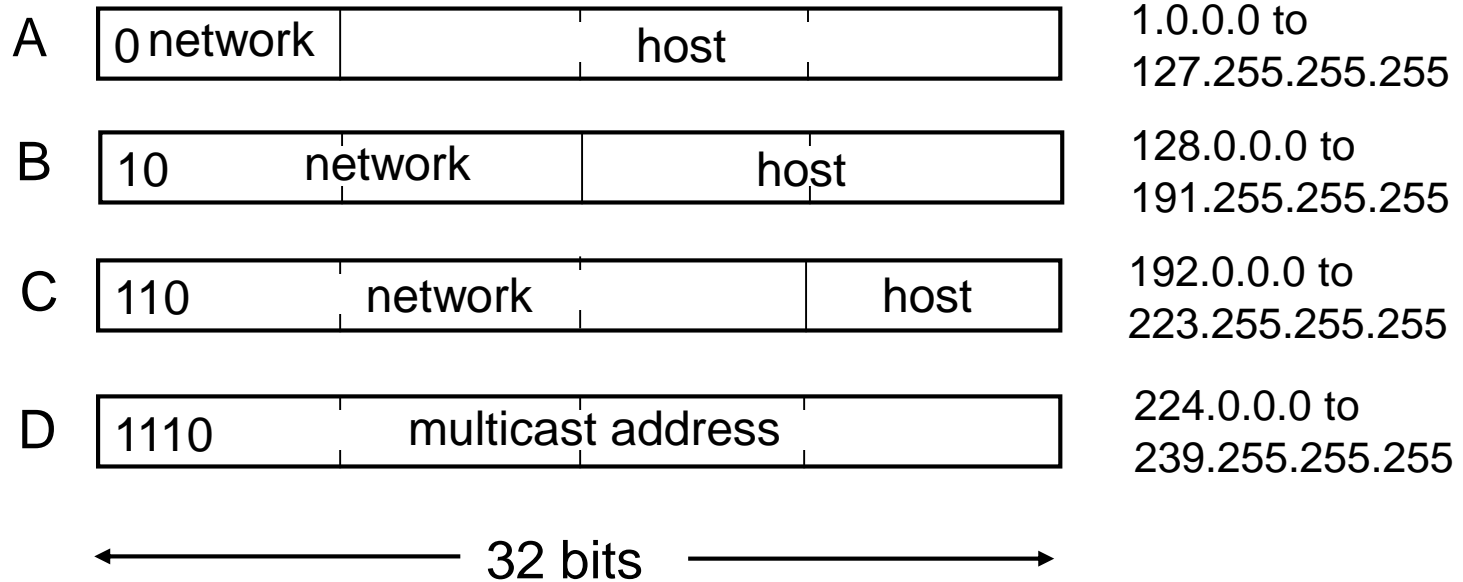


- Theoretically  $2^{32}$  (~4.3 billion) addresses, but in practice only ~3.3 billion
- Not flexible enough – consumes the IP address space ☹
- Solution: CIDR: Classless Inter-Domain Routing



# NETMASK

- Netmask starts with as many 1s as long is the network part of the address
- Netmask determines the size of the sub-networks

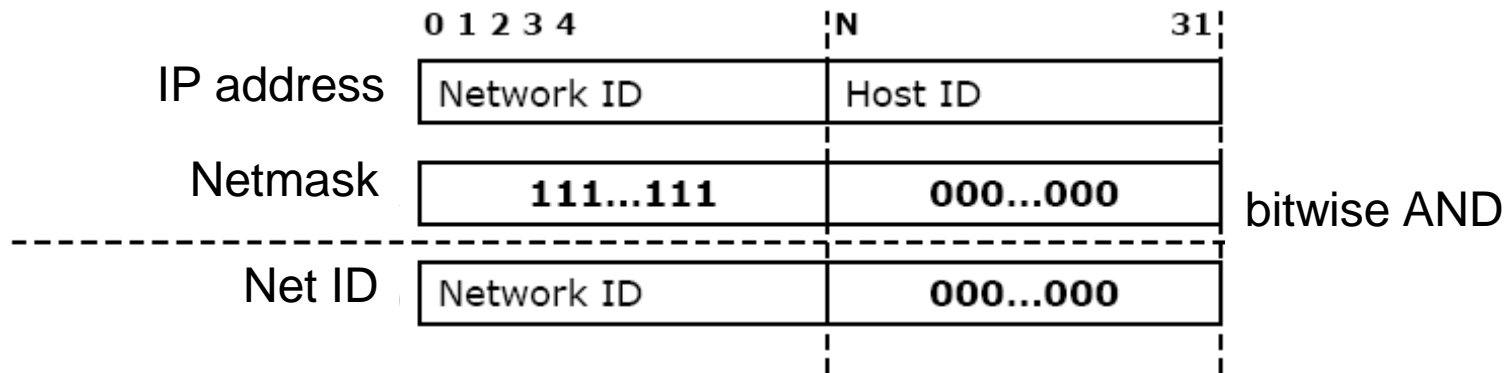


# NETMASK

- Example:
  - BME network
    - IP address range: 152.66.x.x : 255.255.0.0
  - TMIT sub-network
    - IP address range : 152.66.244.x : 255.255.255.0
- 255.255.255.0 → 24 bit netmask : C class
- If the network part can be anything, not only 8,16, 24 -> netmask can determine the length -> size of the network



# VARIABLE LENGTH SUBNET MASK

Assign continuous IP address blocks to sub-networks

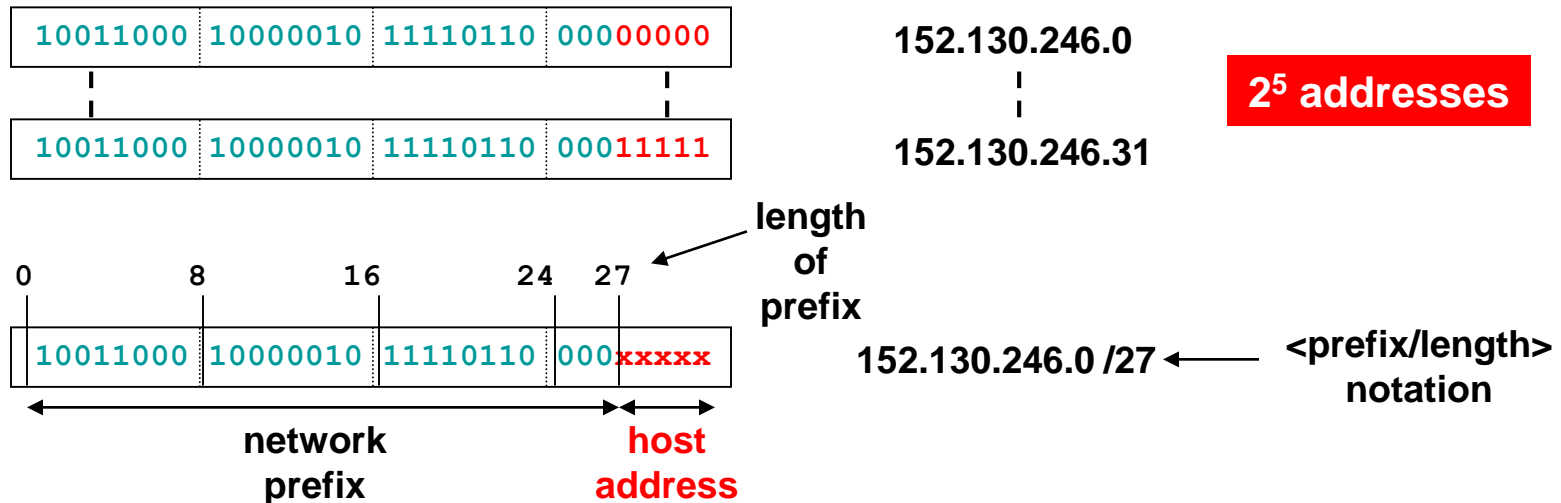



# SPECIAL IP ADDRESSES

- All 0 in host part: address of the (sub-)network
  - e.g. 152.66.244.0
    - Cannot be assigned to hosts
- All 1 in host part: broadcast address
  - Last address of a sub-network:
    - e.g. 152.66.244.255
  - Standard allows to use 255.255.255.255, too
  - Broadcast message: to all hosts of a sub-network
- 127.0.0.0-127.255.255.255: loop-back network (delivered to the sending host itself)
  - 127.0.0.1: own address of the local host



# PRIVATE IP ADDRESS RANGES

Size	IP address range	number of addresses	largest CIDR block (subnet mask)	host id size	mask bits	description
24-bit block	10.0.0.0 - 10.255.255.255	16 777 216	10.0.0.0/8 (255.0.0.0)	24 bits	8 bits	single class A network
20-bit block	172.16.0.0 - 172.31.255.255	1 048 576	172.16.0.0/12 (255.240.0.0)	20 bits	12 bits	16 contiguous class B networks
16-bit block	192.168.0.0 - 192.168.255.255	65 536	192.168.0.0/16 (255.255.0.0)	16 bits	16 bits	256 contiguous class C networks

Private addresses are non-routable



# EXERCISE

- 152.130.246.128/28
  - how many IP addresses does it contain?
  - max. how many hosts does it contain?
  - what is the broadcast address?
- Netmask 28 bits ->  $32-28=4$  bits host part
  - $2^4=16$  IP addresses
  - $16-2=14$  host address (network + broadcast address!)
  - 1000**1111** ->  $128+15=143$  -> 152.130.246.143



# DHCP

- Dynamic Host Configuration Protocol
- Allows a machine to get an IP address from the network
- DHCP may also provide other network parameters:
  - Gateway, DNS server
- Disadvantage: a machine can get different addresses at different times



# MAC ADDRESS

- Media Access Control (Extended Unique Identifier)
  - EUI-48 or MAC-48: 48 bit long,
  - EUI- 64: 64 bit long address
  - 12 hexa digit notation: **00-09-6B-26-ED-37**
  - Manufacturers stores them on the cards (**first part assigned by IEEE to the manufacturers - OUI**)
    - OUI: Organizational Unique Identifier
  - $2^{48}$  combinations (281 thousand billion)
    - Ethernet
    - Bluetooth
    - ATM
  - EUI-64: IPv6



# ARP – ADDRESS RESOLUTION PROTOCOL

- Source must know the hardware address (MAC address) of the destination before IP packets can be sent to it
- ARP is a method that assigns a hardware address to an IP address
- ARP determines the hardware address of the requested IP address by a broadcast message sent on the sub-network
- ARP stores the hardware-IP address assignments in a cache; this is how it can use them later on
- It can be displayed by a Windows **arp -a** command






# ADDRESS RESOLUTION PROTOCOL

1. "If your IP address is 160.30.100.10, then please send me your hardware (MAC) address!"

Source

160.30.100.20

00-aa-00-12-34-56

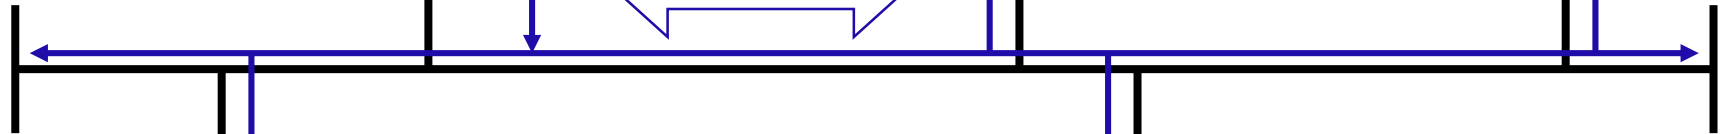

Destination

160.30.100.10

00-a0-c9-78-9a-bc



# ADDRESS RESOLUTION PROTOCOL





1. "If your IP address is 160.30.100.10, then please send me your hardware (MAC) address!"

ARP message exchange:  
Req: Who-has 160.30.100.10? Tell  
00:aa:00:12:34:56

Source

160.30.100.20

00-aa-00-12-34-56

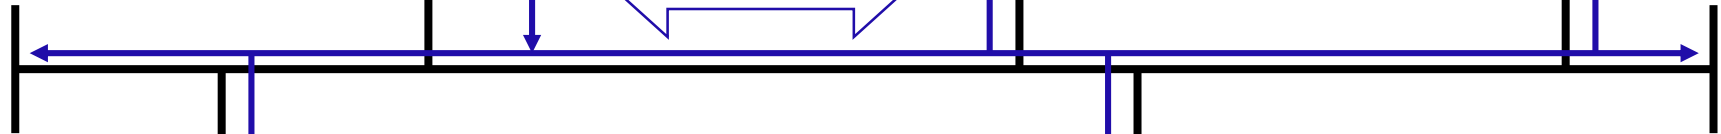

Destination

160.30.100.10

00-a0-c9-78-9a-bc






# ADDRESS RESOLUTION PROTOCOL

1. "If your IP address is 160.30.100.10, then please send me your hardware (MAC) address!"

ARP message exchange:  
Req: Who-has 160.30.100.10? Tell 00:aa:00:12:34:56

Source  
160.30.100.20  
00-aa-00-12-34-56

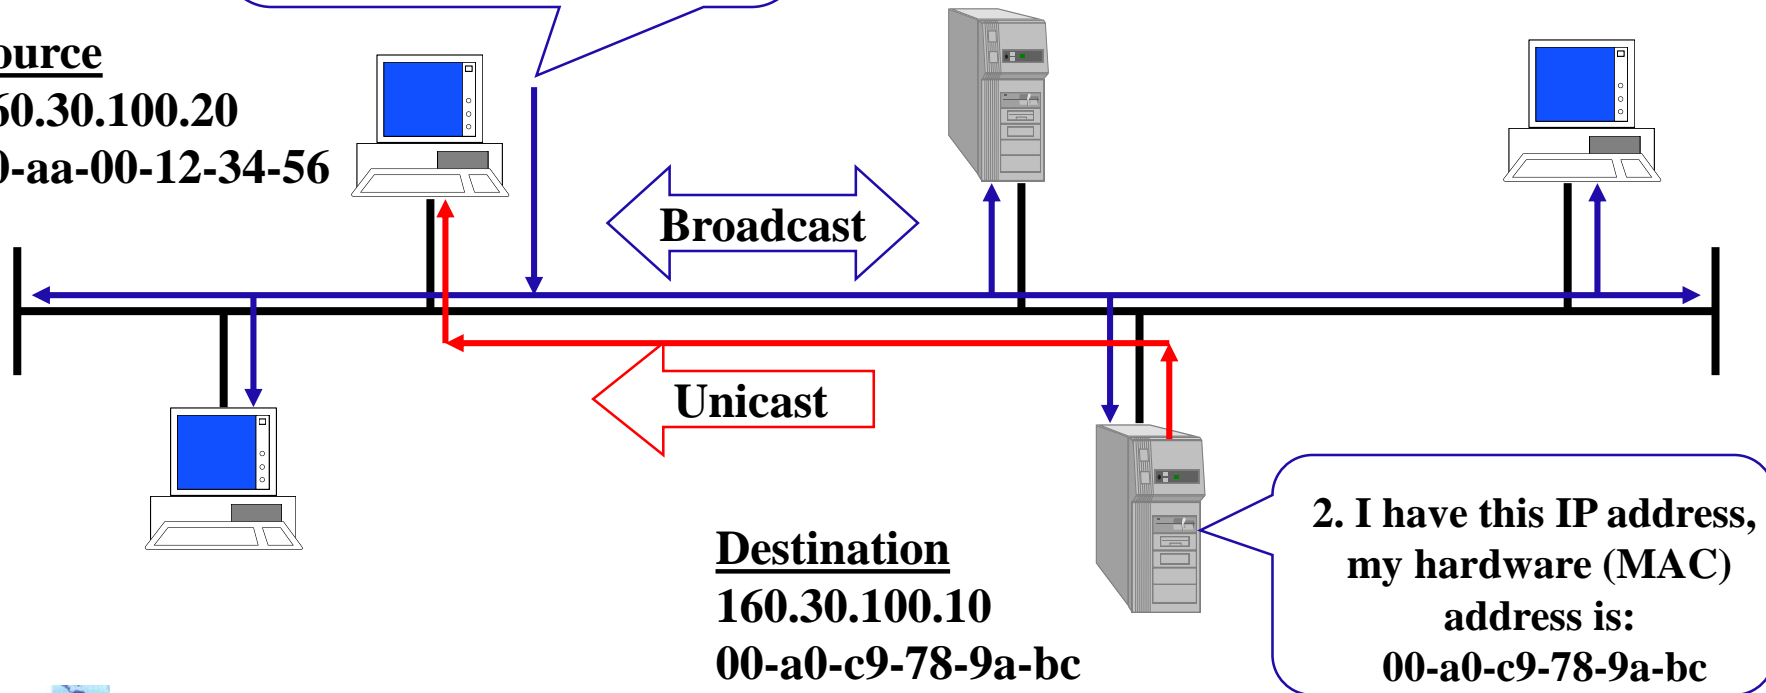

Destination  
160.30.100.10  
00-a0-c9-78-9a-bc

2. I have this IP address, my hardware (MAC) address is: 00-a0-c9-78-9a-bc



# ADDRESS RESOLUTION PROTOCOL

1. "If your IP address is 160.30.100.10, then please send me your hardware (MAC) address!"

ARP message exchange:

Req: Who-has 160.30.100.10? Tell

00:aa:00:12:34:56

Ans: 160.30.100.10 is-at

00:a0:c9:78:9a:bc

Source

160.30.100.20

00-aa-00-12-34-56

Broadcast

Unicast

Destination

160.30.100.10

00-a0-c9-78-9a-bc

2. I have this IP address, my hardware (MAC) address is:  
00-a0-c9-78-9a-bc




# RARP - REVERSE ADDRESS RESOLUTION PROTOCOL

- RARP assigns IP address to a hardware (MAC) address
- RARP makes it possible to a newly started machine to propagate its Ethernet address by a broadcast request
  - „My 48-bit Ethernet address is 00-a0-c9-78-9a-bc.  
Does anyone know my IP address?”
- RARP server detects the request and sends the requested IP address back
  - DHCP
  - For ‘stupid’ devices, e.g. printer




# NAT - NETWORK ADDRESS TRANSLATOR

- The IP Network Address Translator (RFC1631) (1994)
- Connecting Private Networks to Internet
- L3 (IP layer) level conversion
- Transparent for endpoints

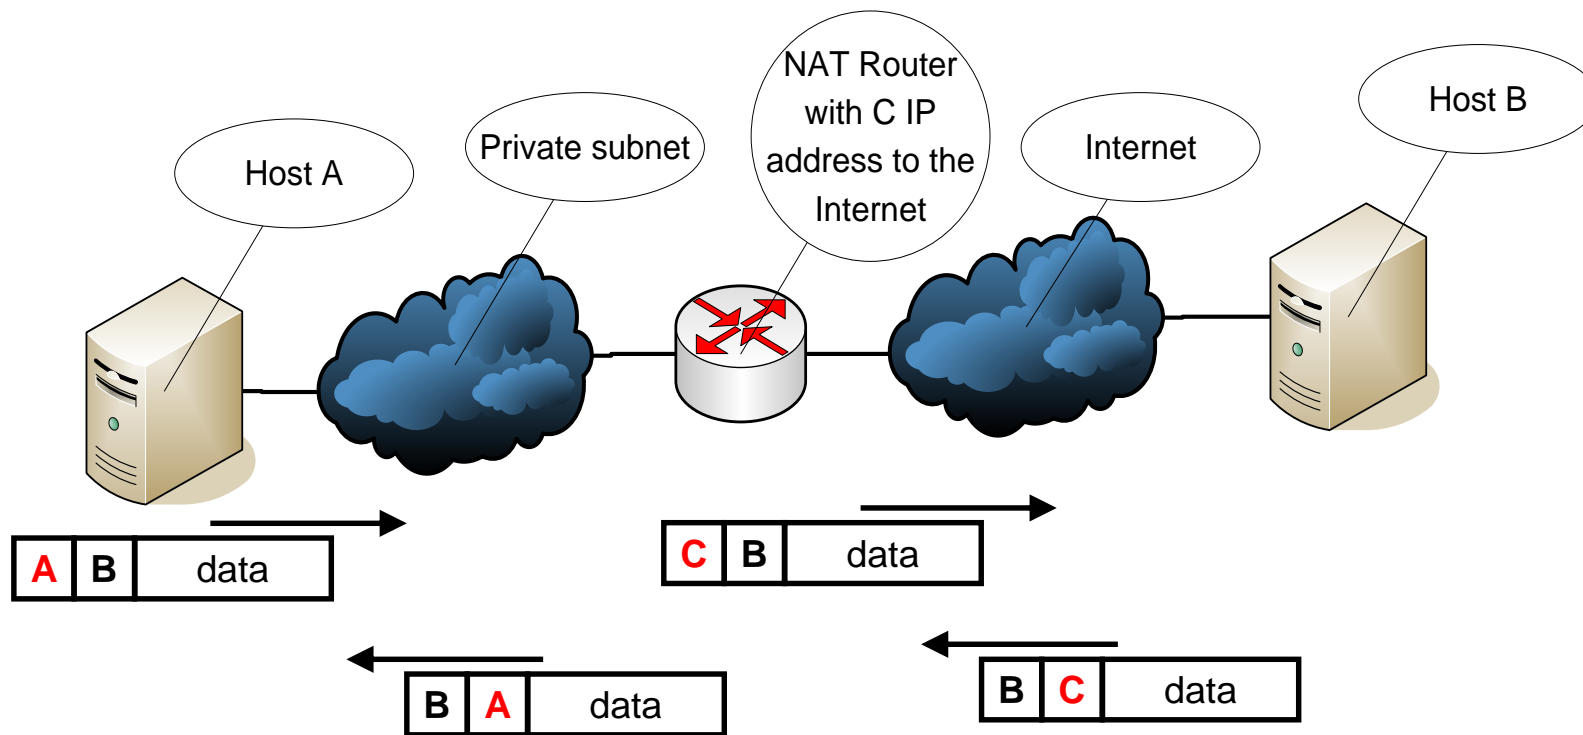

# NAT – WITH MORE HOSTS (M=N)

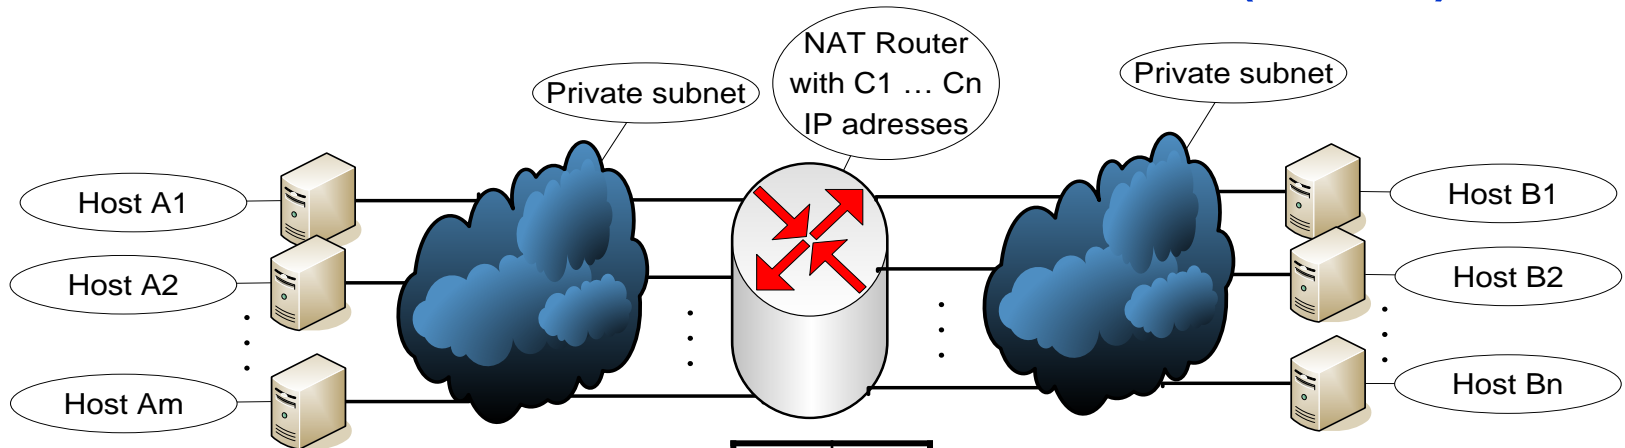


A1	C1
A2	C2
...	...
Am	Cn


- # of private addresses = # of public addresses available for the router
- Assignment can be
  - static
  - dynamic
    - to increase protection



# NAT EXAMPLE

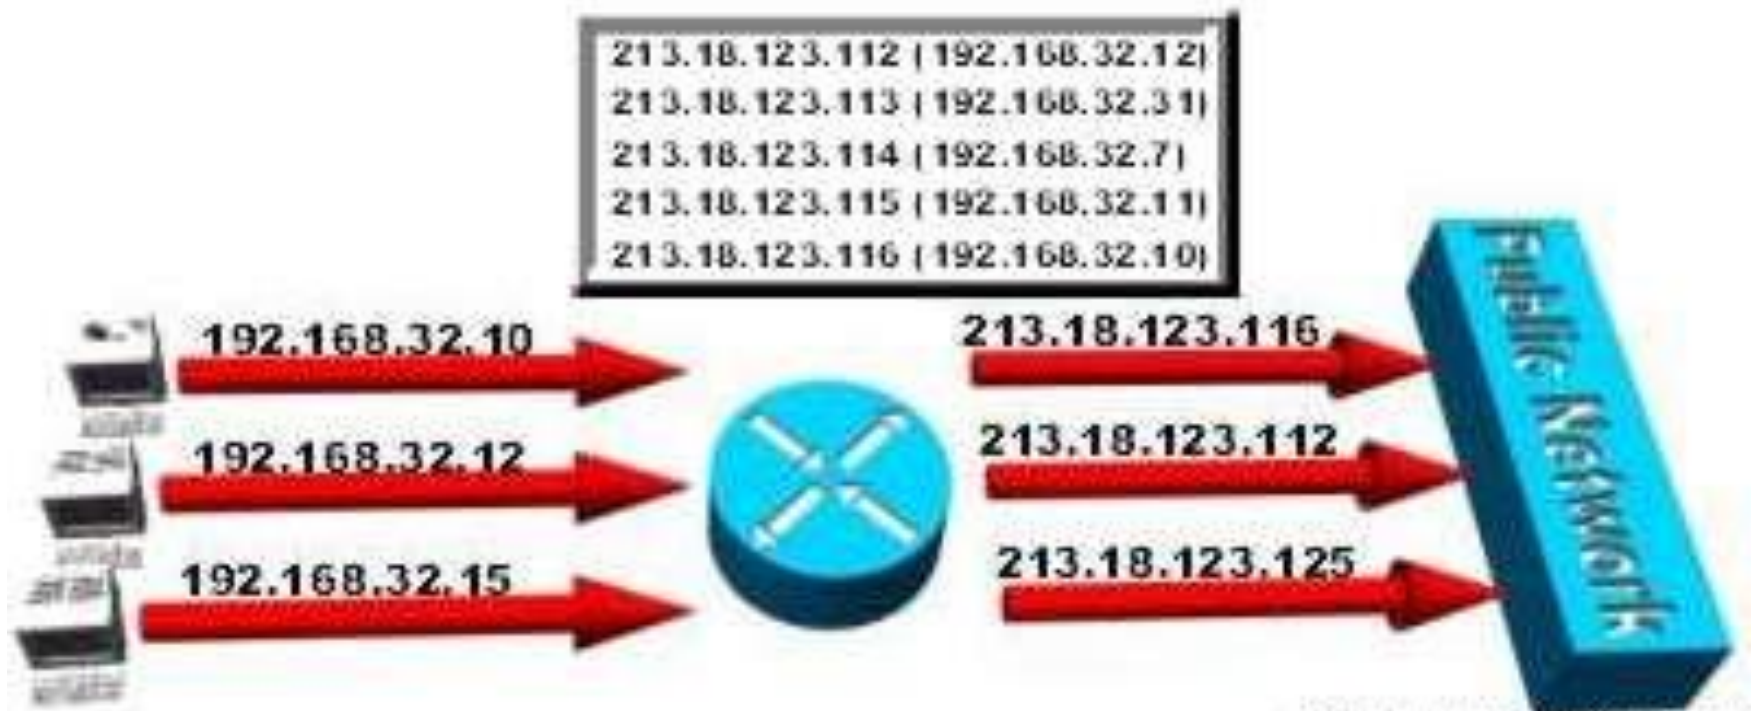

# NAT – WITH MORE HOSTS ( $M > N$ )

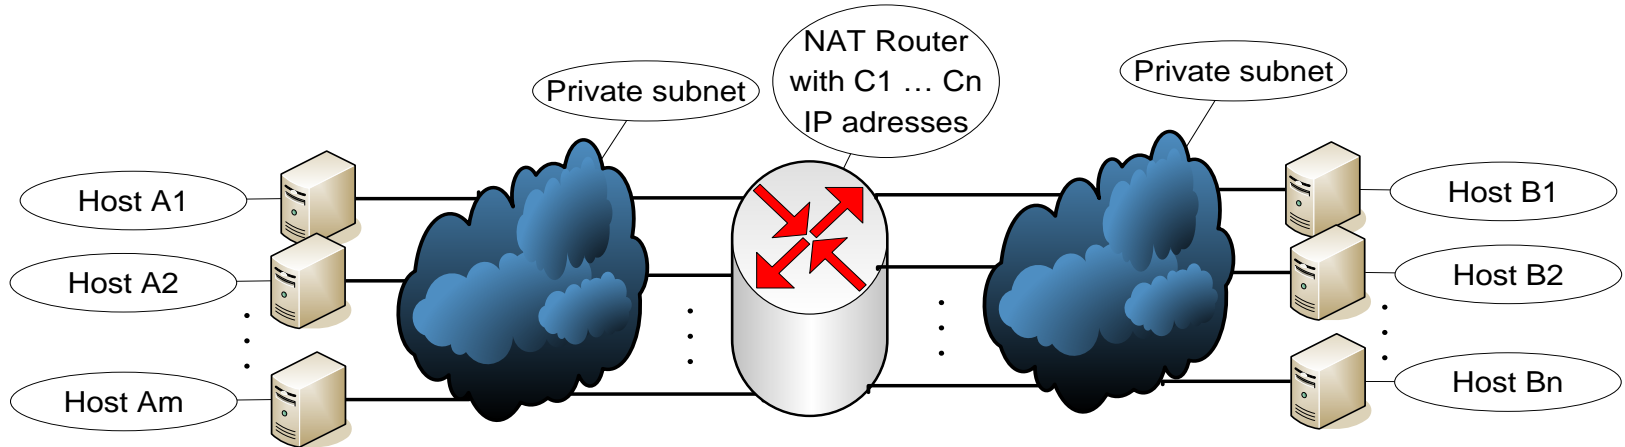


A1	C1
A2	C2
...	...
Am	Cn

- Needs an assignment strategy
  - if not enough ( $m > n$ )???
  - Typically  $n = 1$
  - static: more than one private addresses for one public
    - reverse traffic can not be routed to proper server
  - dynamic: use the next idle public address
    - not enough addresses if every server has a connection at the same time



# NAT + PORT TRANSLATION


- Network Address Port Translation (NAPT)

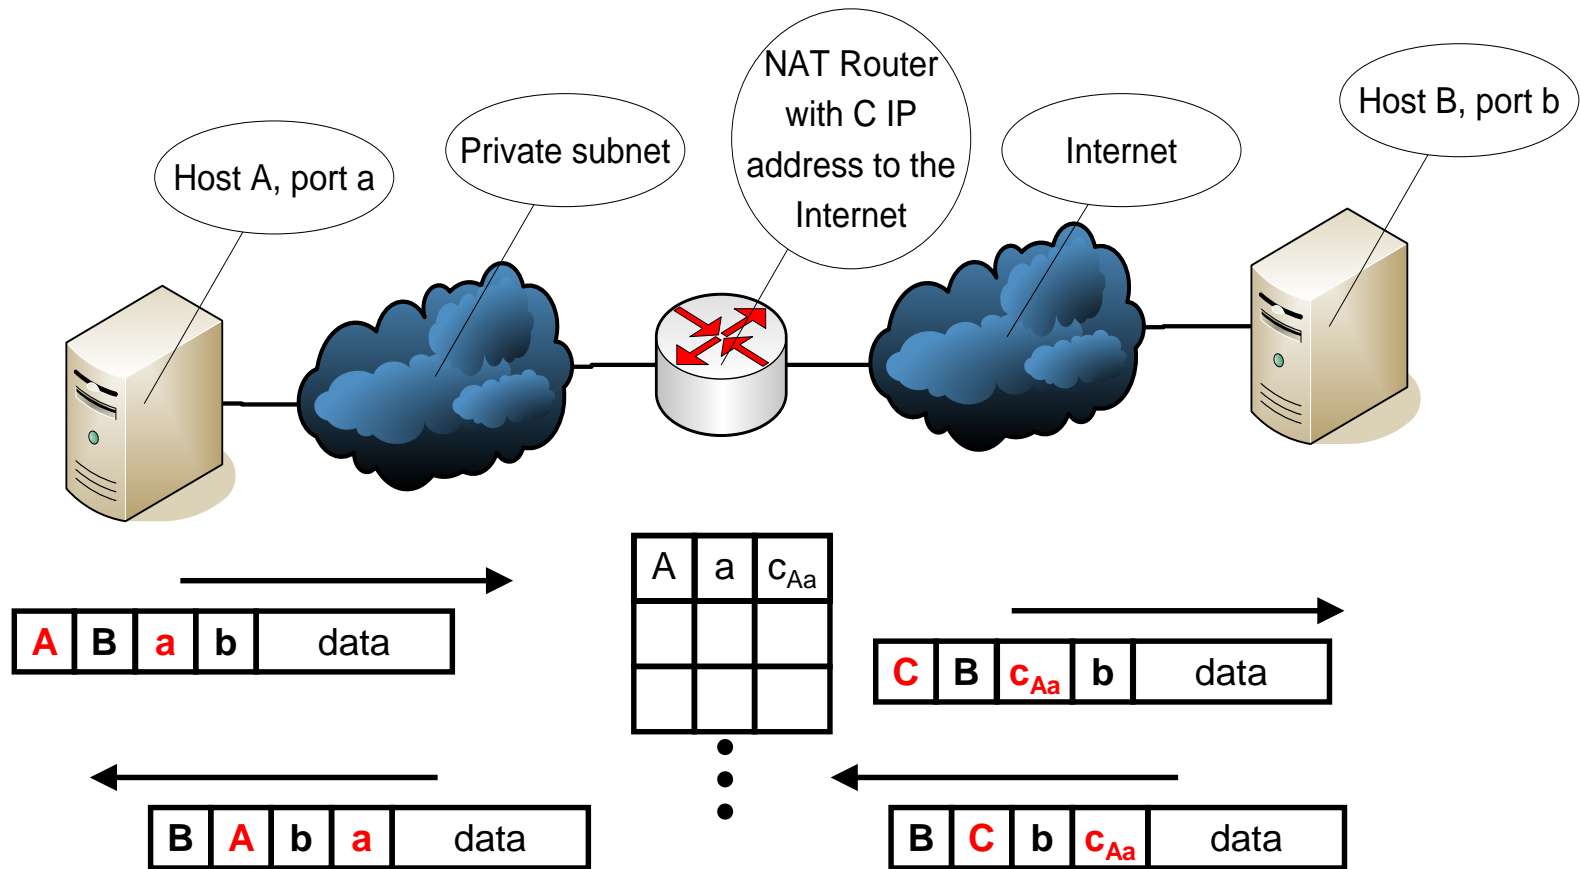



# NAPT EXAMPLE

- Table:
  - DRAM (Dynamic RAM)
  - 4MB ~26 000 connections

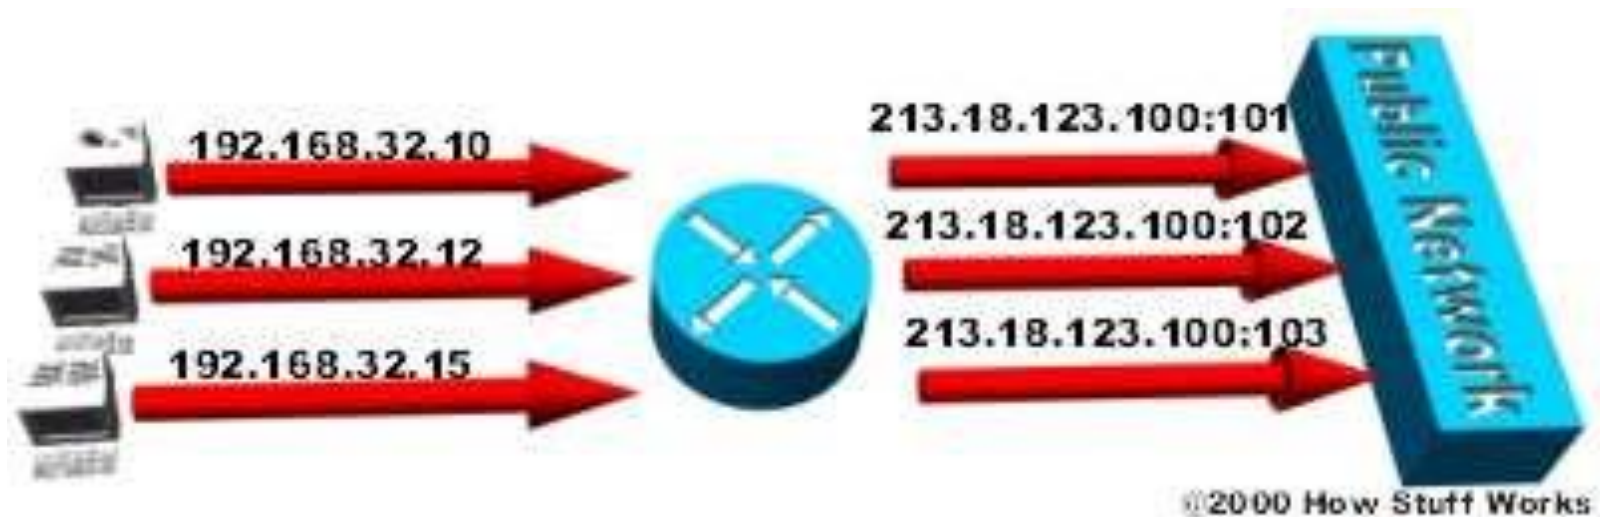

# NAPT EXAMPLE

**Step 2:** map private IP & port to public IP & port

NAT Translation Table	
Private IP Addr & Port	Public IP Addr & Port
192.168.100.3, 3855	145.12.131.7, 6282
.....	.....

Please fetch  
<http://www.yahoo.com>

192.168.100.3



192.168.100.4



192.168.100.5



**Step 1**

Source: 192.168.100.3, 3855  
Dest: 209.131.36.158, 80  
(www.yahoo.com)

**Step 3**

Source: 145.12.131.7, 6282  
Dest: 209.131.36.158, 80  
(www.yahoo.com)

To  
Yahoo




Default Gateway  
192.168.1.1

145.12.131.7  
(Public IP Address)




# NAPT – VIRTUAL SERVER

- Export the internal server with static NAPT assignment
  - looks like if the NAPT server provided the service
    - to every port
    - to selected port(s)
      - restriction for not allowed traffic

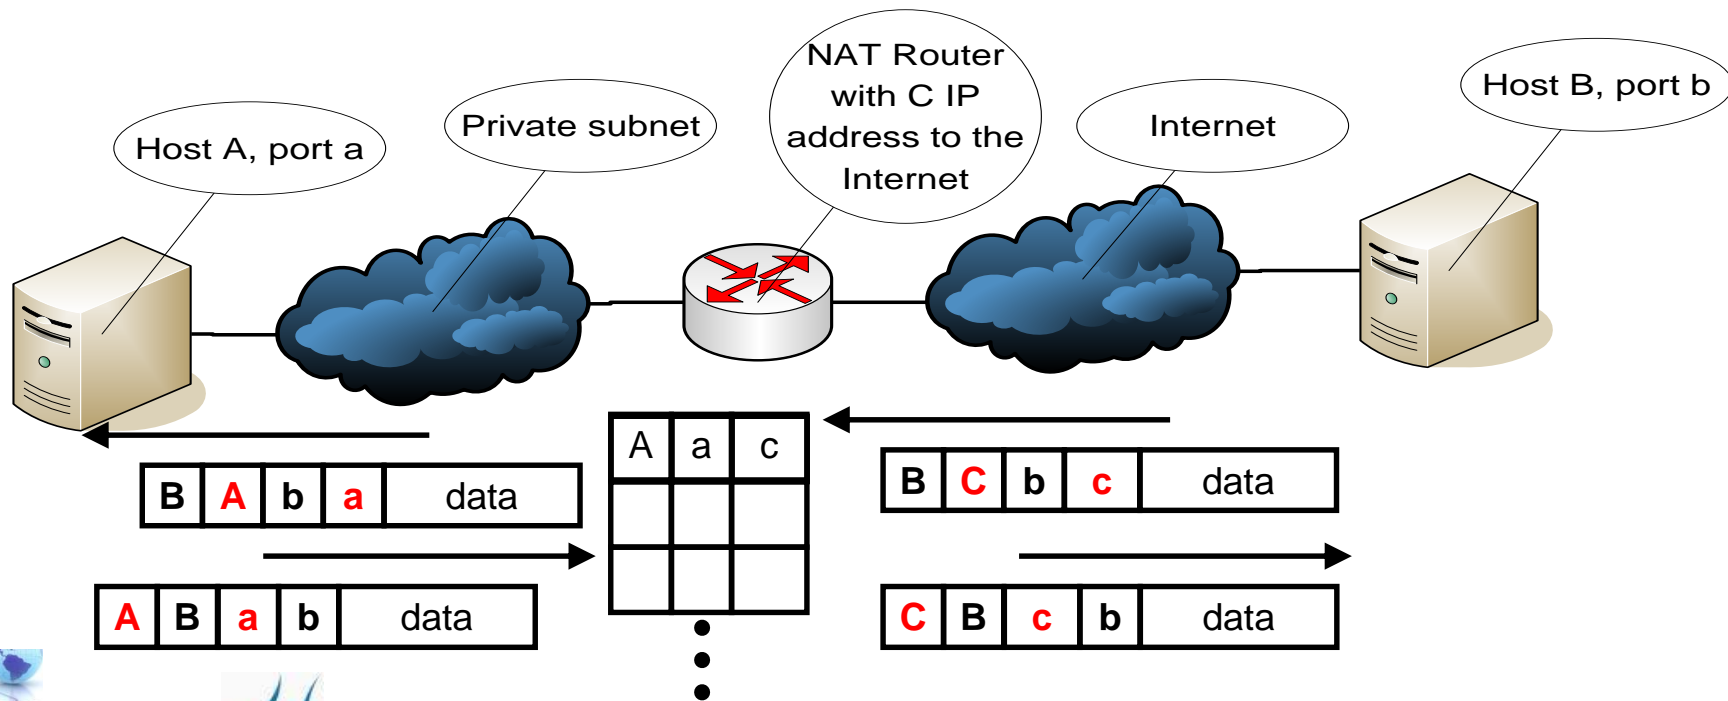


# NA(P)T – OPTIMISATION

- More internal server
  - Load sharing/balancing
  - Internal structure hidden - modifiable

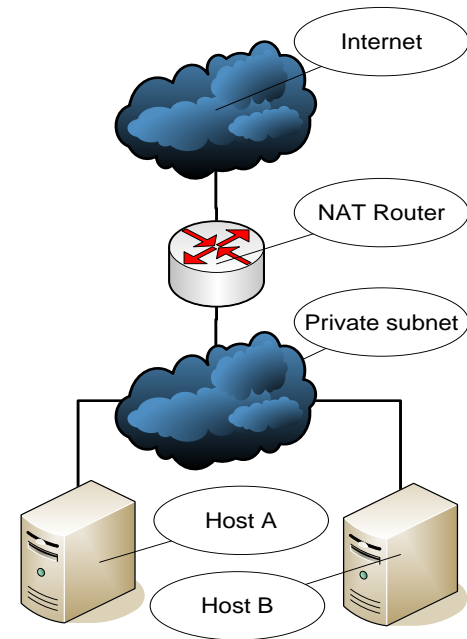

# NA(P)T – OPTIMISATION

- More interfaces
  - Reliability
  - Multi-homing
    - Typically with different ISPs

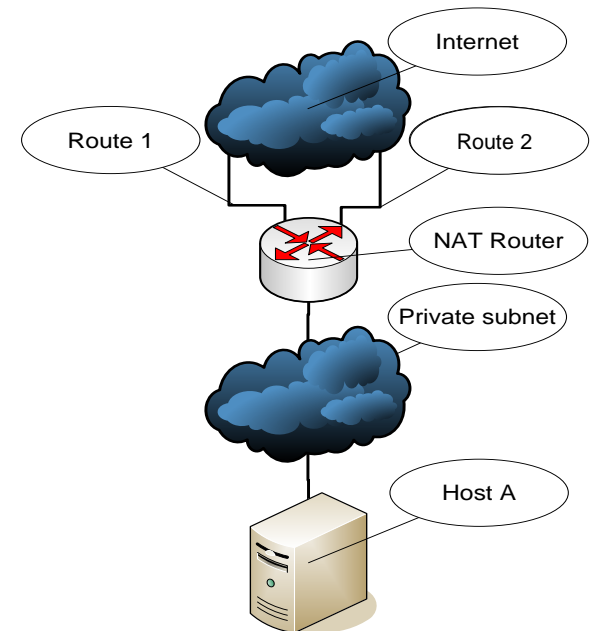


# NA(P)T – FIREWALL

- Allows only internally initiated connections
  - Disables externally originated connections – only replies to internal connections allowed
- BUT: inbound mapping
  - “Let you in” only from specific devices/IP addresses
  - E.g. working from home
  - Must be configured in advance
- NAT ≠ proxy server
  - NA(P)T transparent for servers




# NAPT – SECURITY

- Dynamical entries
  - but they may be scanned (and so reached) during lifetime
  - not a NAPT-specific problem

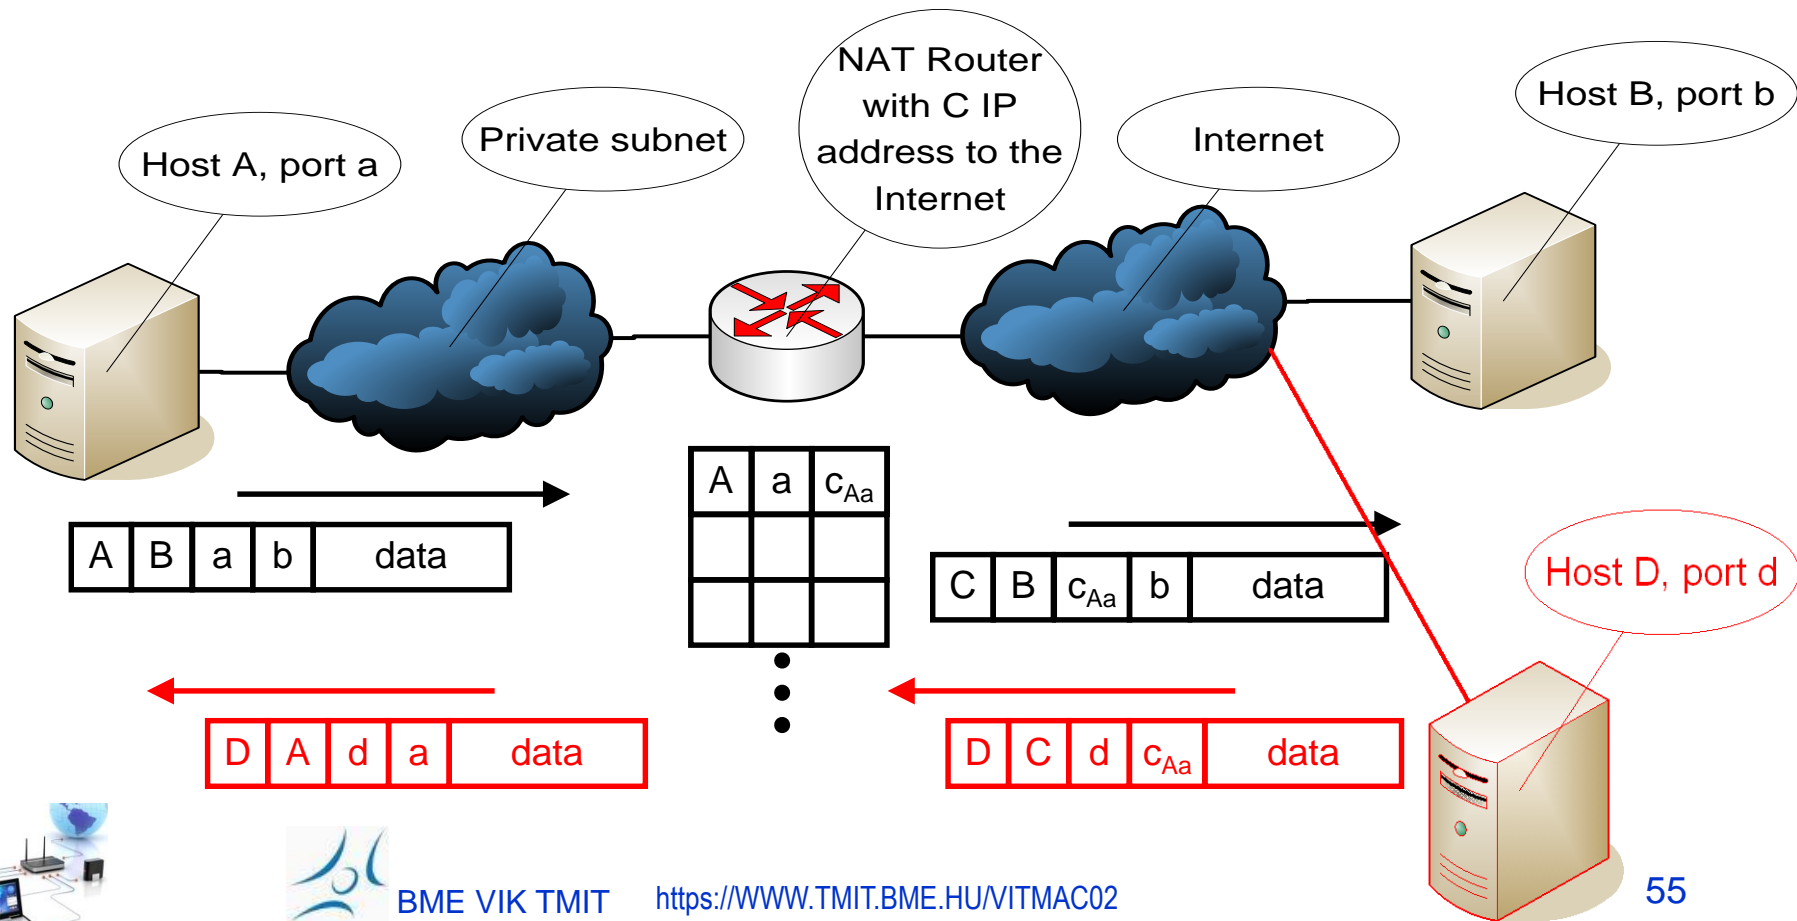

# NAPT – SECURITY EXTENSION

- Extended with the remote IP address
- Simple firewall

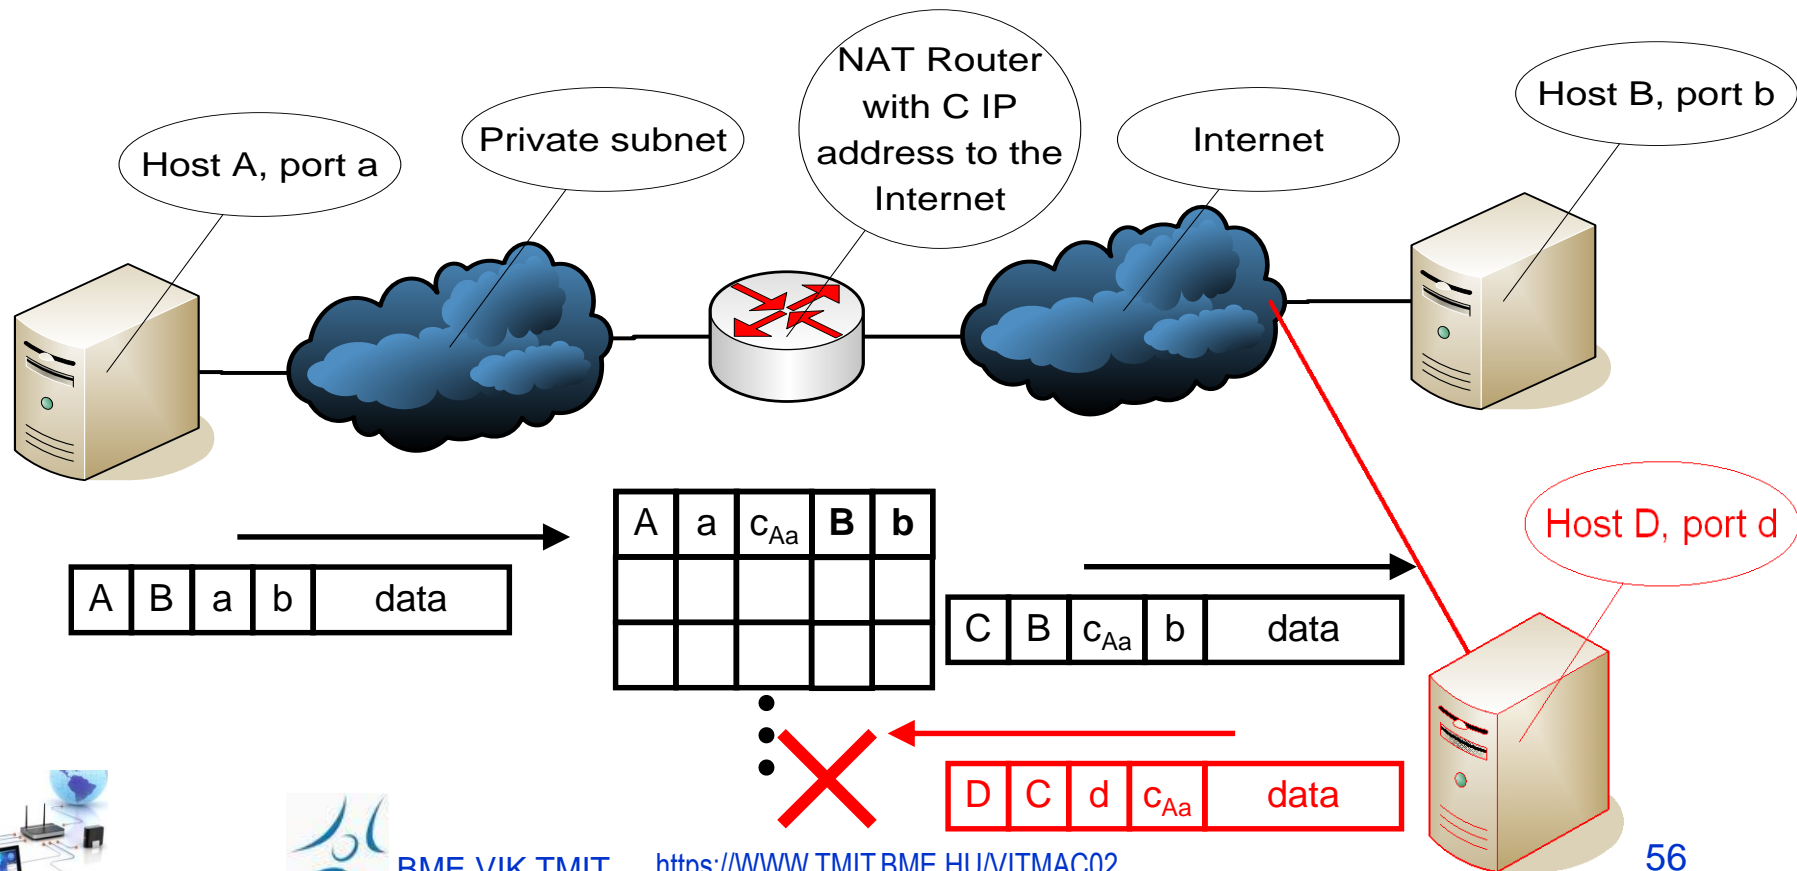




# NAT PROBLEMS

- Impossible to open a connection from outside

- IP address in the application layer

- Routing protocols
- DNS
- FTP
- H.323
- SIP
- HTTP (absolute URL)
- etc.

data

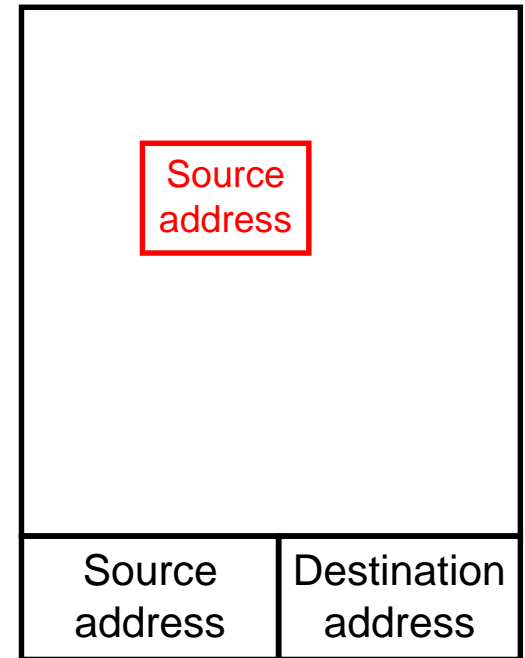


- Solution

- IP addresses must be replaced also in the application layer (e.g. in data part of an IP packet)
  - violates the OSI layering concept
  - application proxy at a NAT router



# DOMAIN NAME SYSTEM (DNS)

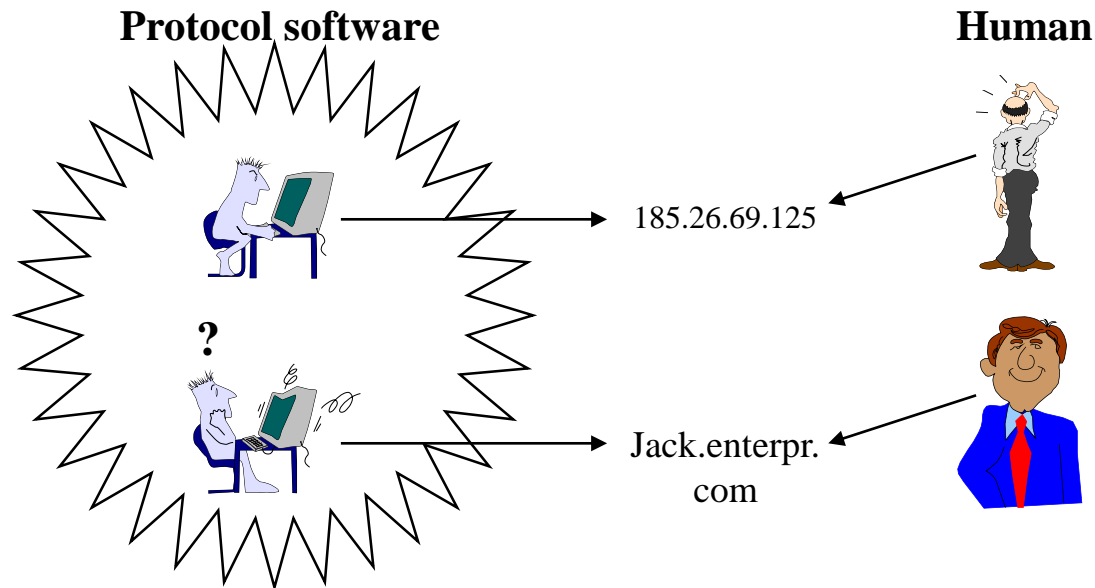

- For a human it is hard to remember an IP address
  - But convenient for software using IP protocol
- For a human symbolic names are more natural
  - But software using IP protocol struggles with them



# DNS CONTINUED

- Name of a computer – IP address database
- Hierarchical structure
- Distributed database, distributed control
- Structured names
- Widely supported by different operating systems
- Two main domain types:
  - General (7, all of 3 letters)
  - Countries (of 2 letters)
- Disadvantage: static, manual administration



# DNS NAMESPACE

- General domains:

- (Most of them may only be registered only within U.S., but e.g. **.com** can be registered anywhere)


<i>Domain</i>	<i>Description</i>
<b>.com</b>	Commercial organisations
<b>.edu</b>	Educational institutions
<b>.gov</b>	Government organisations
<b>.mil</b>	Military group
<b>.net</b>	Major network support centre
<b>.org</b>	Organisations other than those above
<b>.int</b>	International organisations

- Countries:


- e.g.: **.hu .us .fr .de**



# INTERNET DOMAIN NAMESPACE

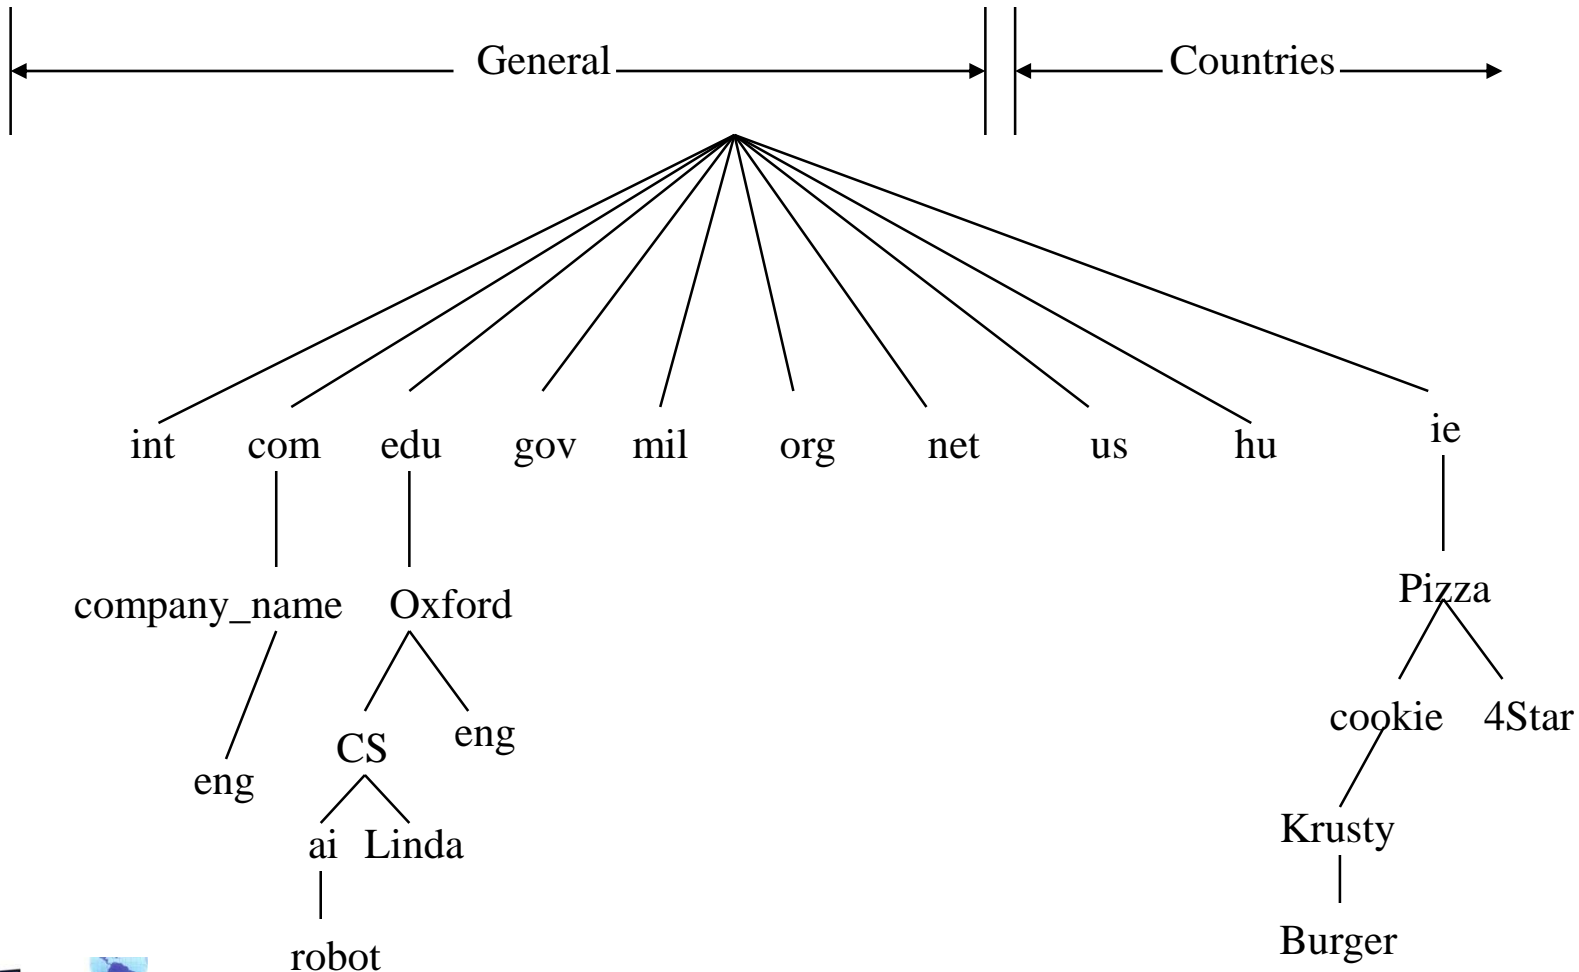


# DOMAIN NAME RESOLUTION

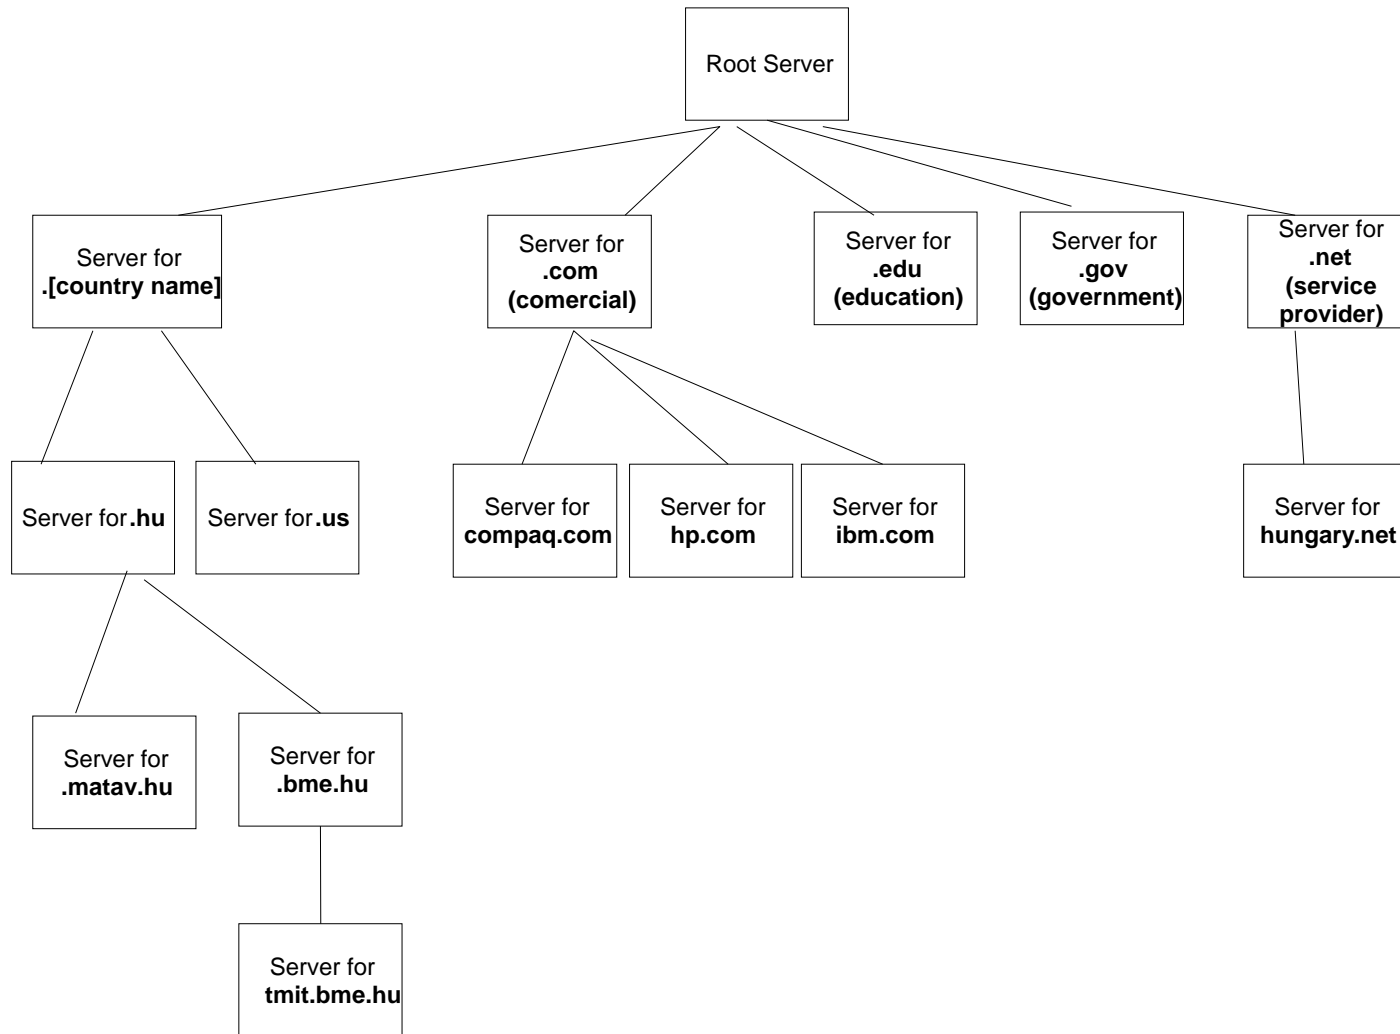



# DNS ADDRESS RESOLUTION

(Steps of resolution of **anybody . company . com** domain name)

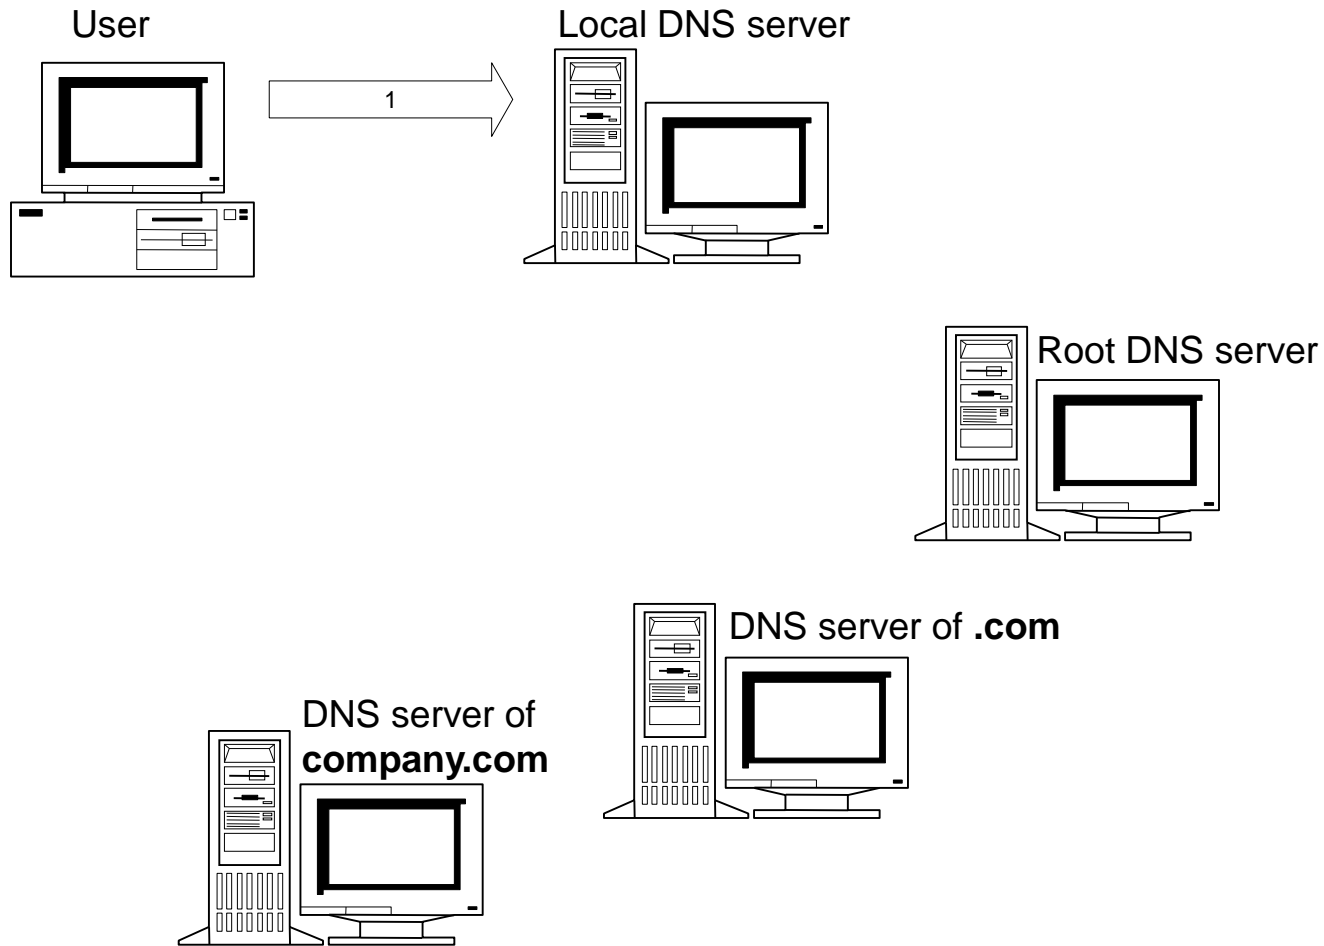

# DNS ADDRESS RESOLUTION


(Steps of resolution of **anybody . company . com** domain name)

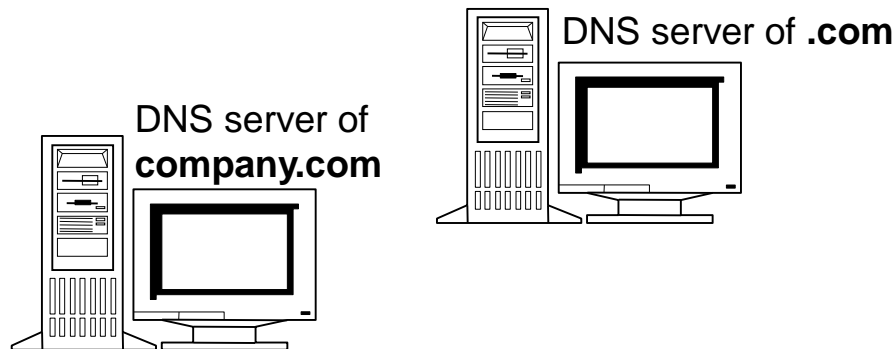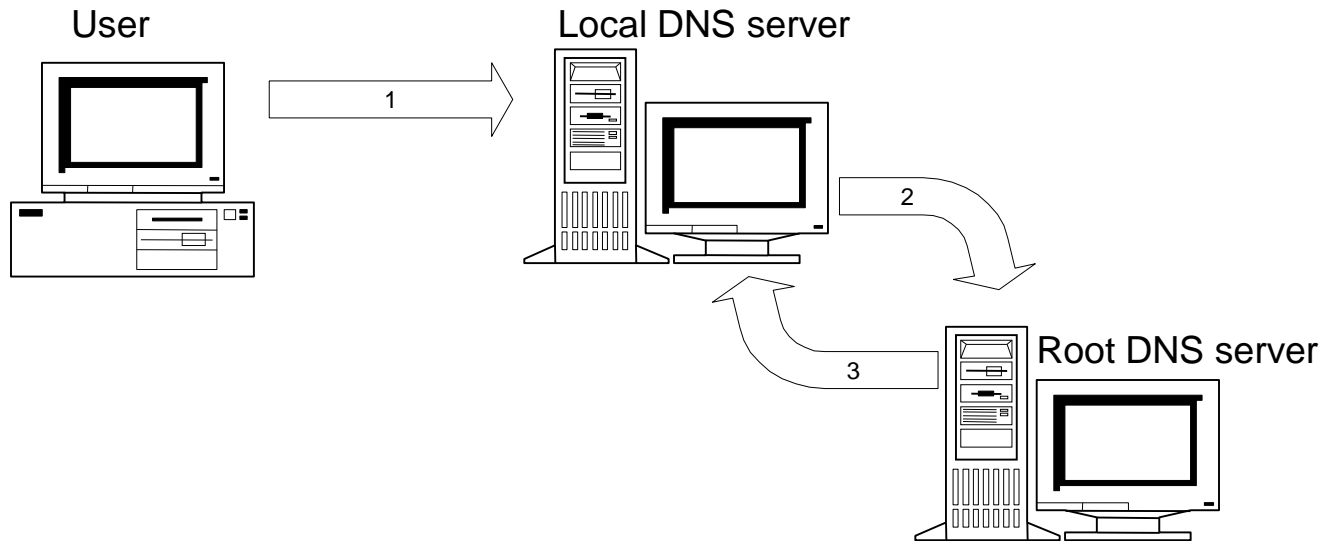




# DNS ADDRESS RESOLUTION

(Steps of resolution of **anybody . company . com** domain name)

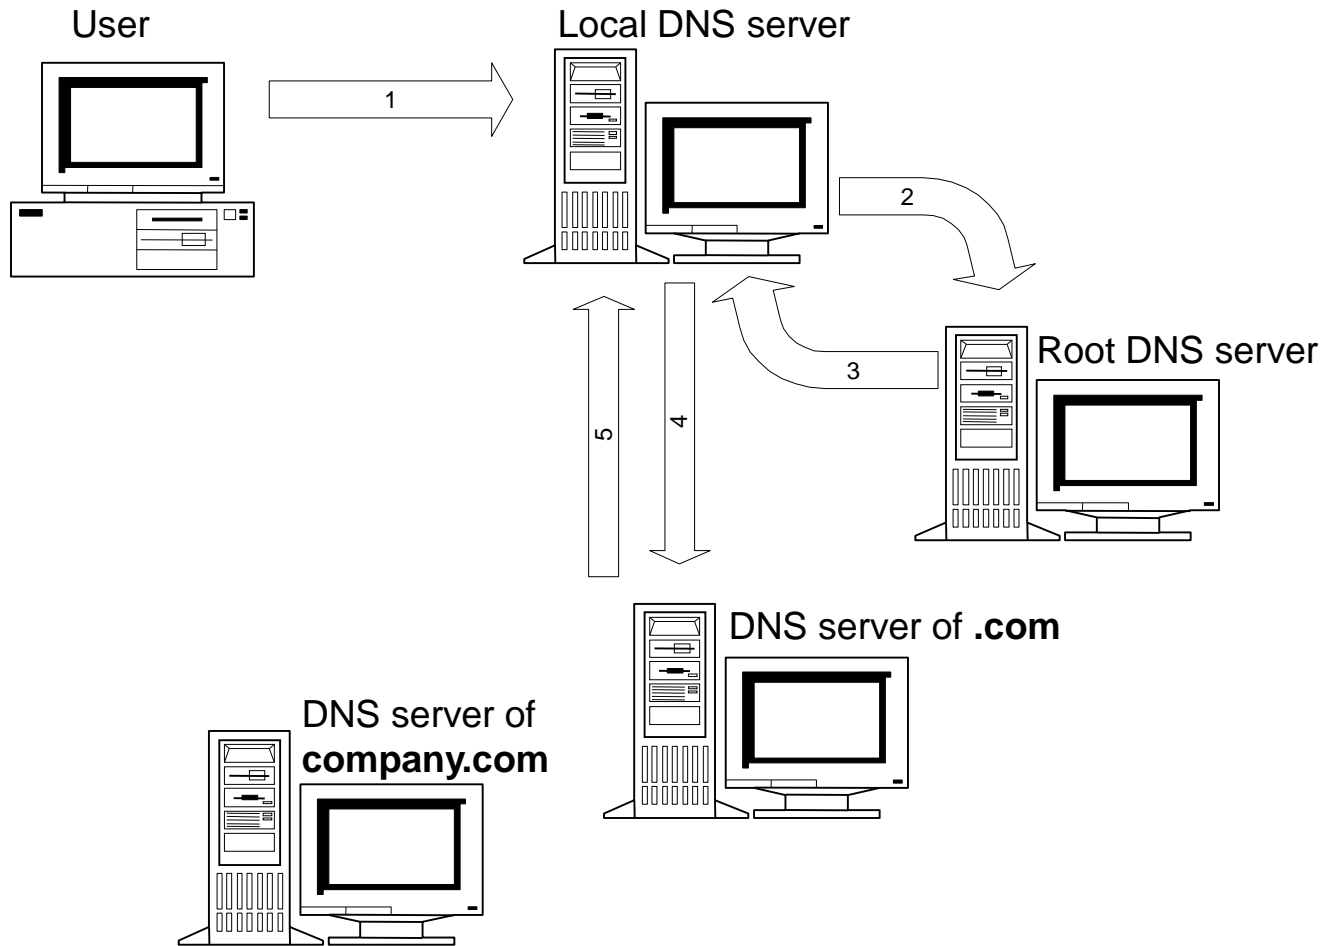


# DNS ADDRESS RESOLUTION

(Steps of resolution of **anybody . company . com** domain name)

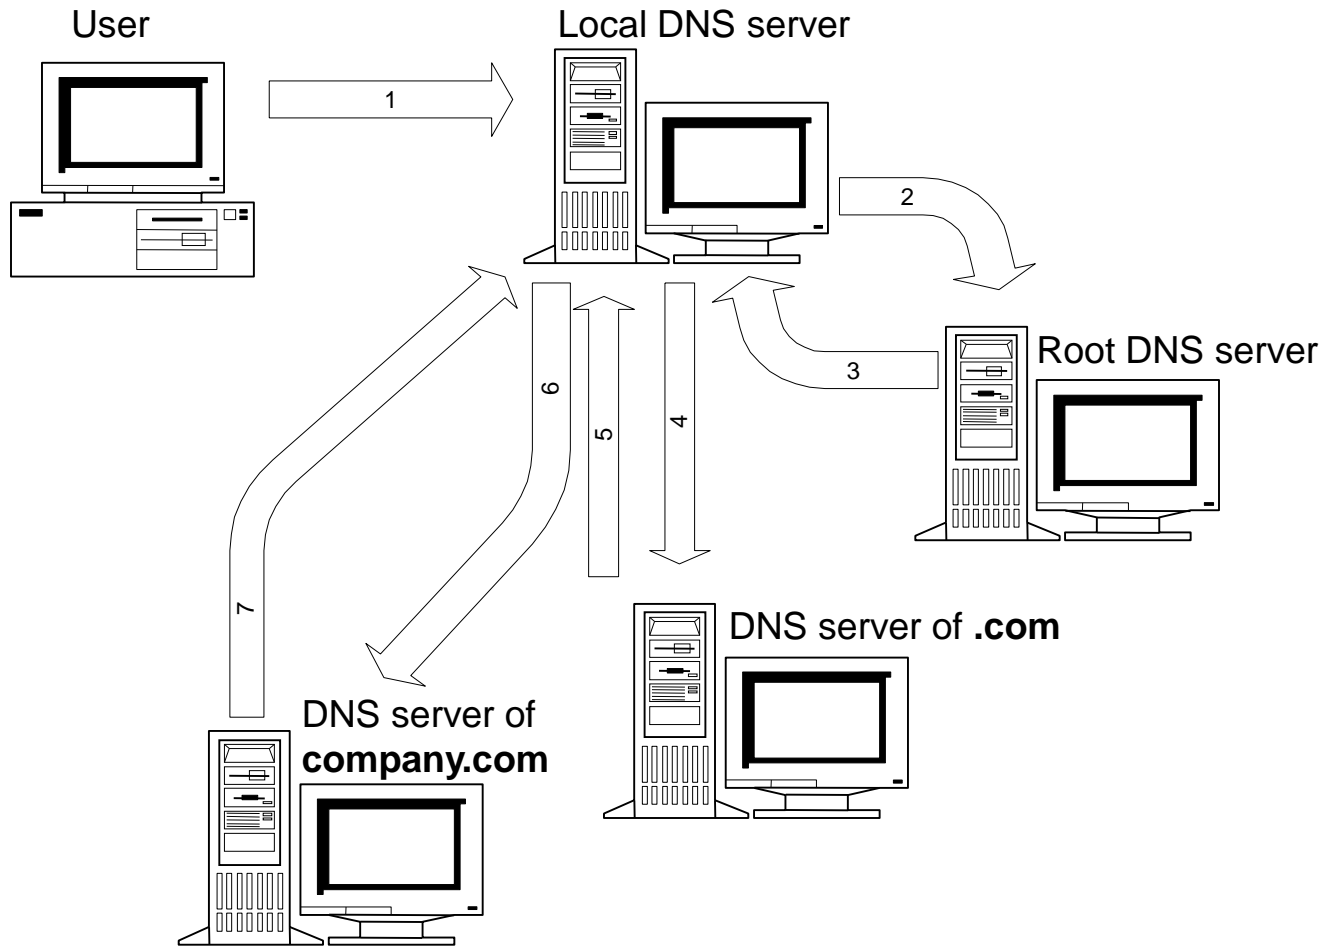

# DNS ADDRESS RESOLUTION

(Steps of resolution of **anybody . company . com** domain name)

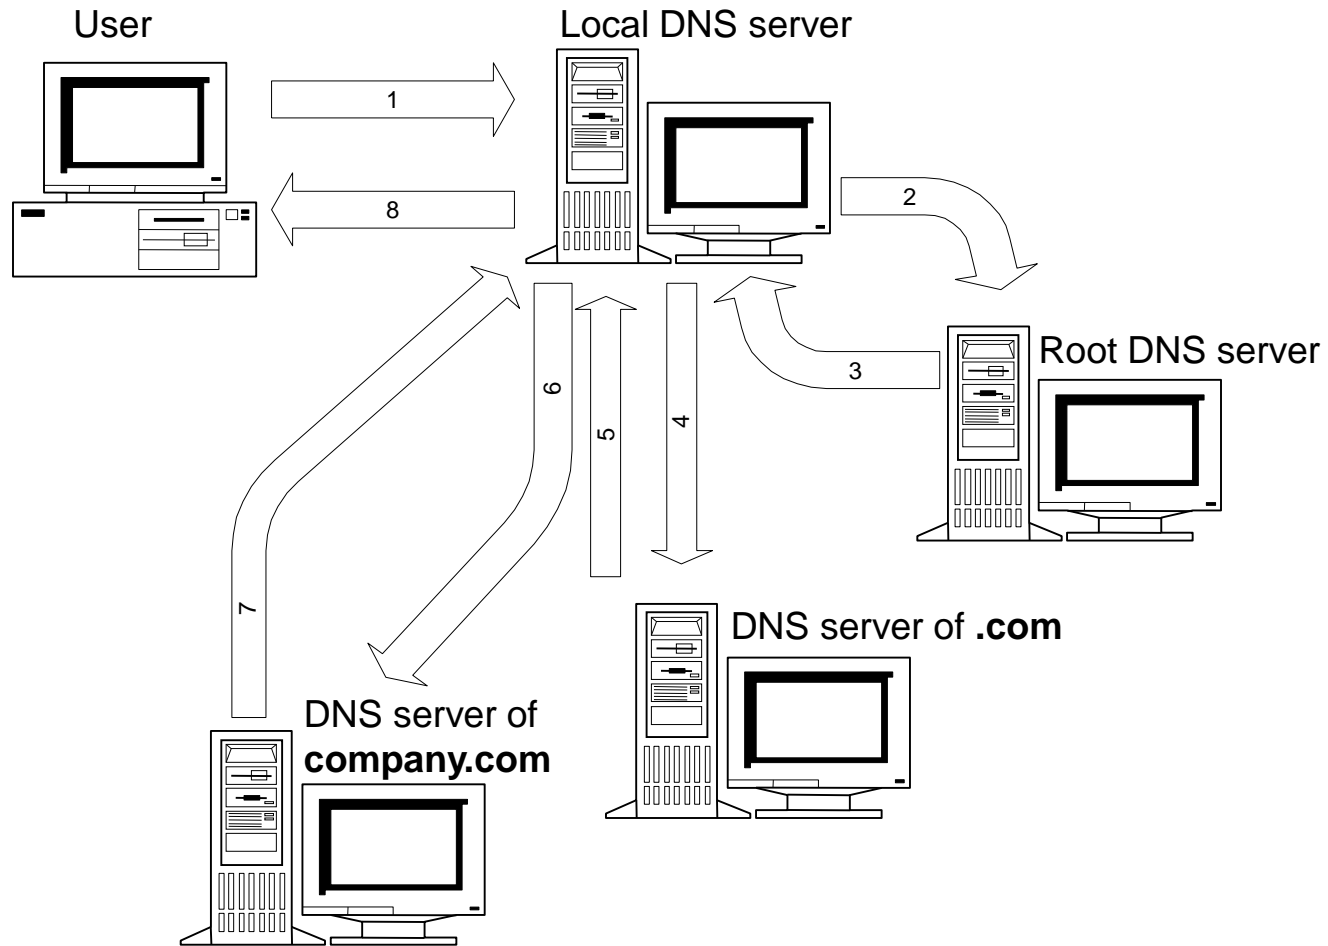

# DNS CACHING

- DNS servers store the recently resolved names to reduce Internet traffic and increase the efficiency
- The local server returns by the information stored in the cache, but marks it as „non-authoritative” (~not for sure valid), and gives the address of the server that stores the exact binding
- If the efficiency (speed) is important, the client accepts the non-authoritative information
- If the accuracy is important, the client turns to the „authority” server and verifies if the binding between name and address is still valid
- Whenever an authority responds to a request, it includes a Time To Live (TTL) value in the response that specifies how long it guarantees the binding to remain valid



# INTERNET CONTROL MESSAGE PROTOCOL, ICMP

- Transmission of error reports and IP layer control messages
- ICMP messages are carried as IP packets and are therefore unreliable
- Most widely used „debugging” tool
  - Ping, traceroute



# ICMP MESSAGE TYPES AND FORMAT

IP Header	
Type of Message	8b
Error Code	8b
Checksum	16b
Parameters, if any	Var
Information	Var

TYPE FIELD	ICMP Message Types
0	<b>Echo Reply</b>
3	Destination Unreachable
4	Source Quench
5	Redirect (change a route)
8	<b>Echo Request</b>
11	<b>Time exceeded for a packet</b>
12	Parameter problem on a packet
13	Timestamp request
14	Timestamp reply
15	Information request (obsolete)
16	Information reply (obsolete)
17	Address mask request
18	Address mask reply



# PING

- Ping: for testing the aliveness of a device
  - accessibility of a terminal
  - round trip time (RTT)
  - length of route (in terms of hop-s)
  - optionally record route

```
Ping alpha [152.66.246.10] with 32 bytes of data:
```

```
Reply from 152.66.246.10: bytes=32 time=114ms TTL=250
```

```
Reply from 152.66.246.10: bytes=32 time=26ms TTL=250
```

```
Reply from 152.66.246.10: bytes=32 time=23ms TTL=250
```

```
Reply from 152.66.246.10: bytes=32 time=27ms TTL=250
```

```
Ping statistics for 152.66.246.10:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
```

```
Approximate round trip times in milli-seconds:
```

```
    Minimum = 23ms, Maximum = 114ms, Average = 47ms
```



# IP SETTINGS

- Basic settings on a computer
  - IP address/netmask
  - Default gateway
  - DNS server
- Extended settings
  - Default domain name
  - More DNS servers





# PART II


## NETWORKS

(FOR HOME PROCESSING)




BME VIK TMIT


# NETWORK TOPOLOGIES

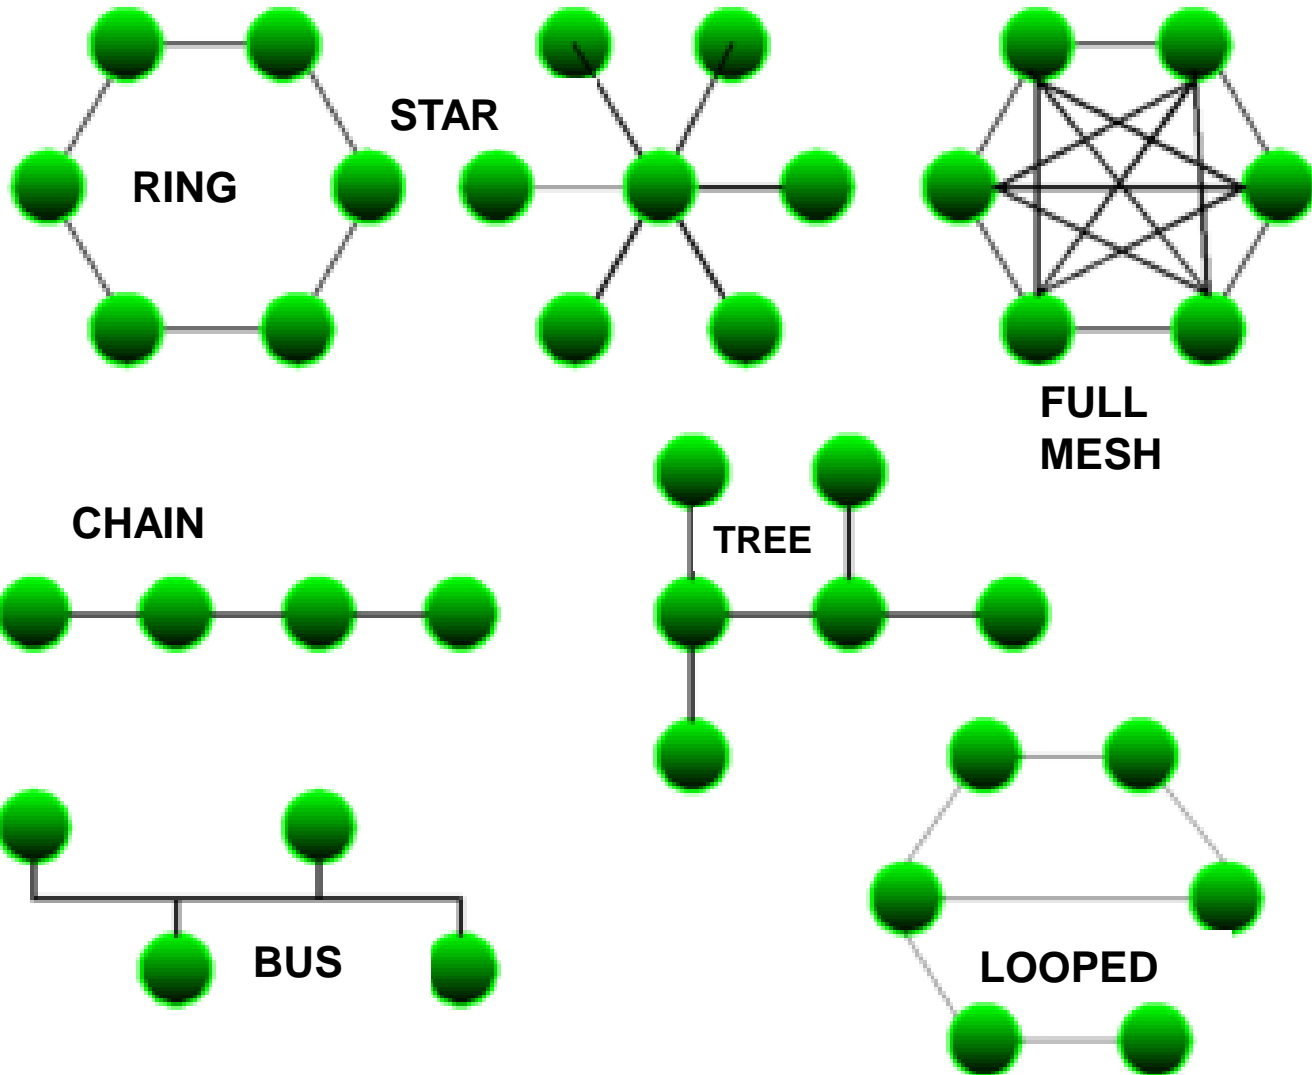


# SIMPLE STAR LAN

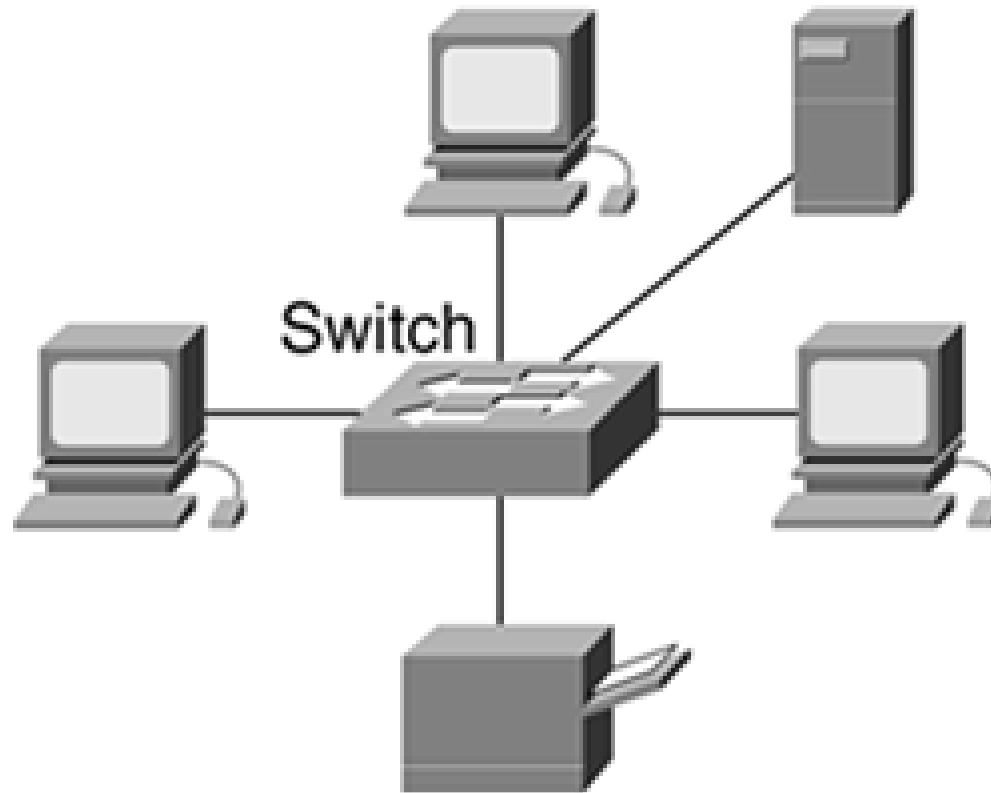


# LAN, CAMPUS NETWORK - STAR

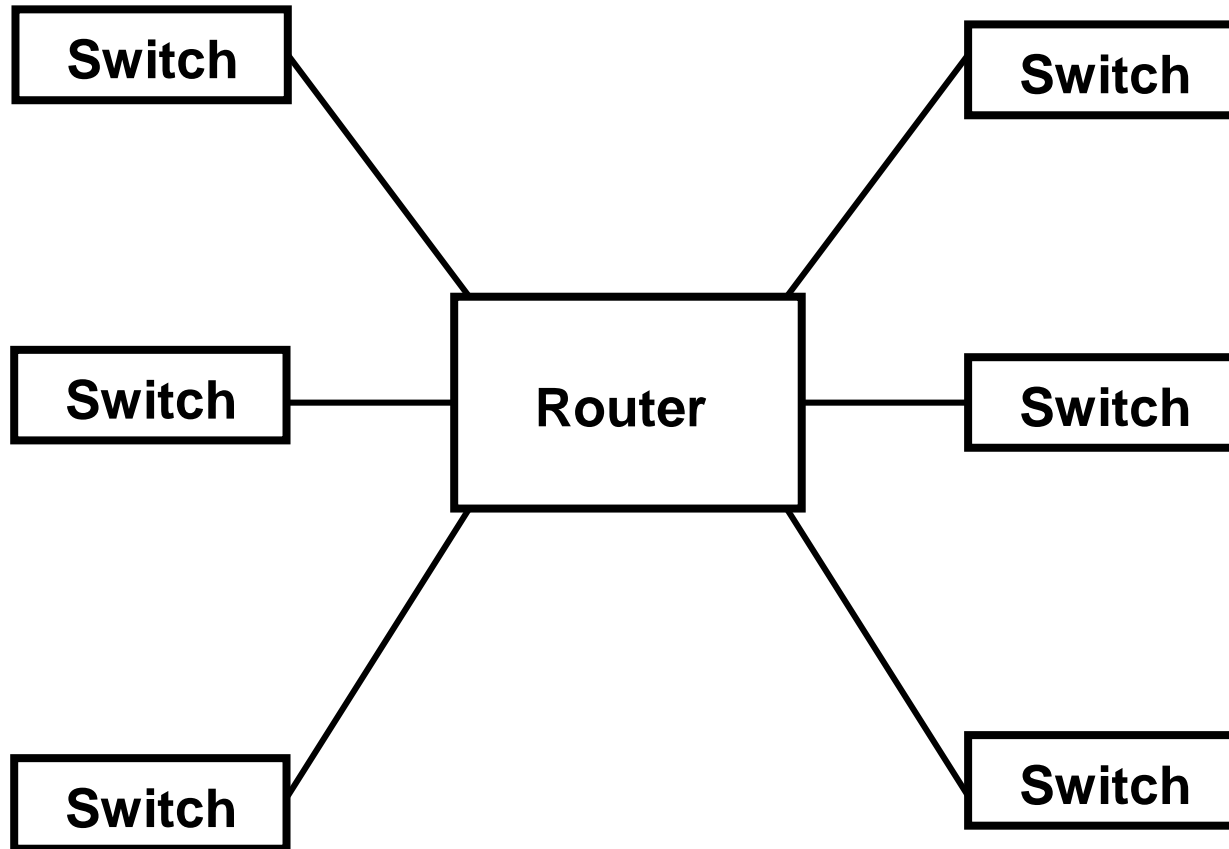


# WAN – STAR

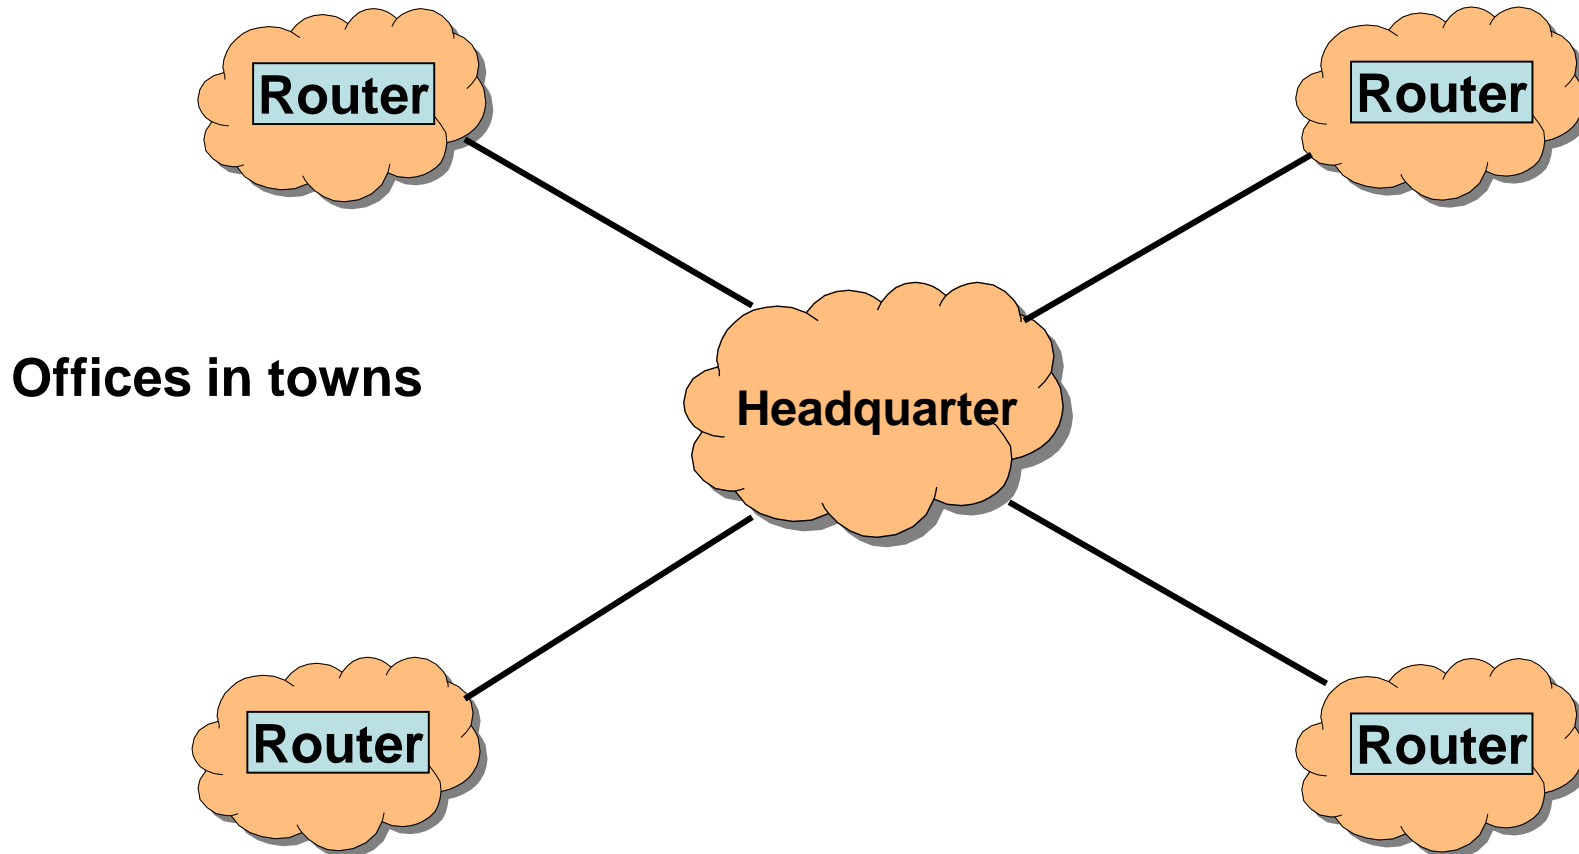

# WAN – STAR WITH DUPLICATED CENTRE

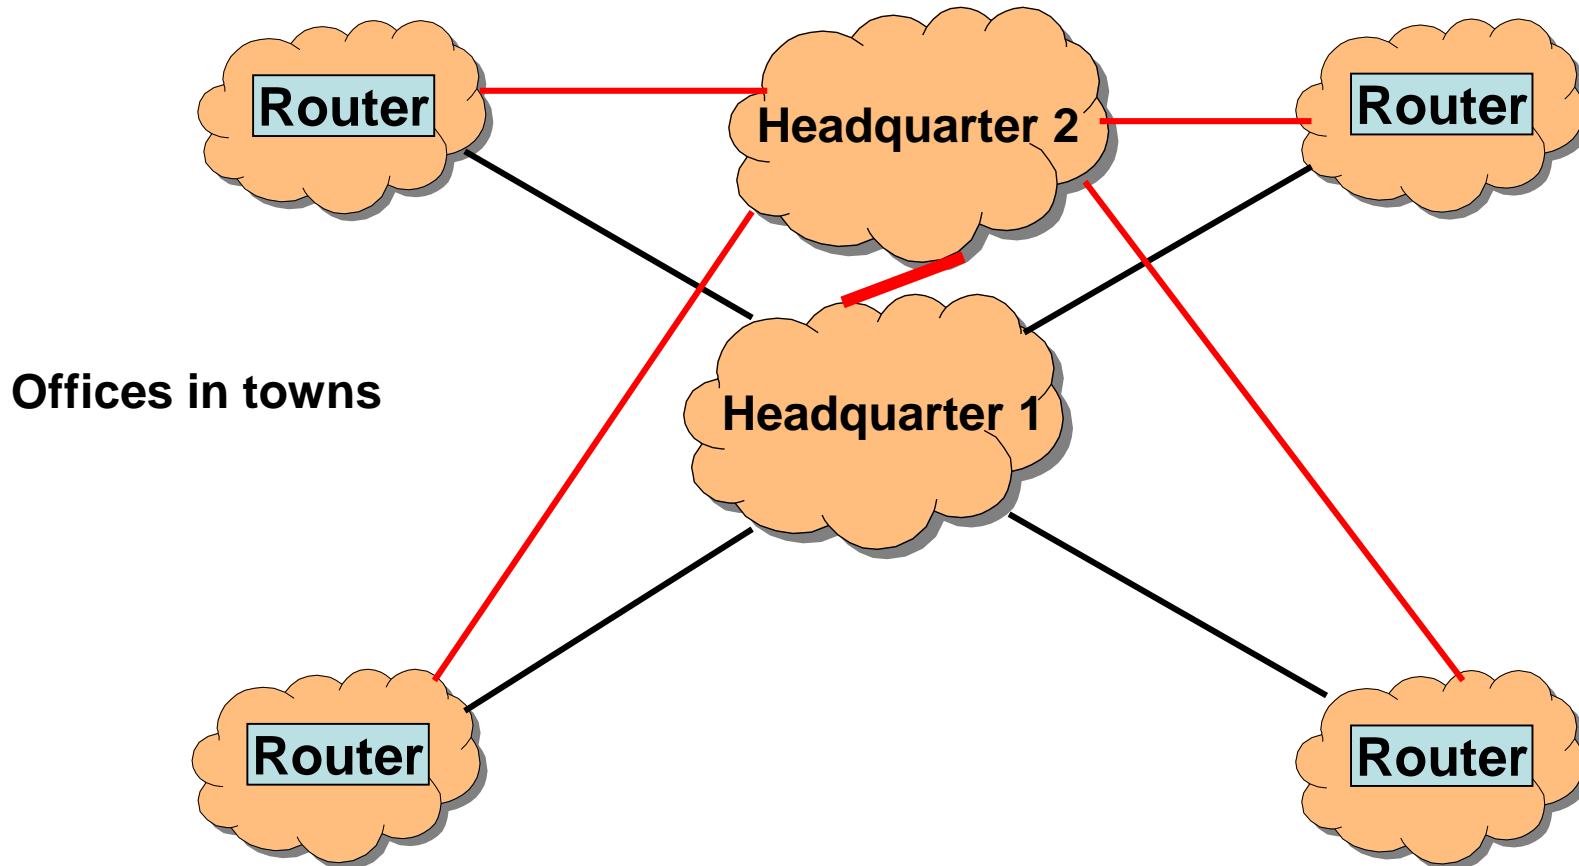

# MULTIPLE STAR (TREE)

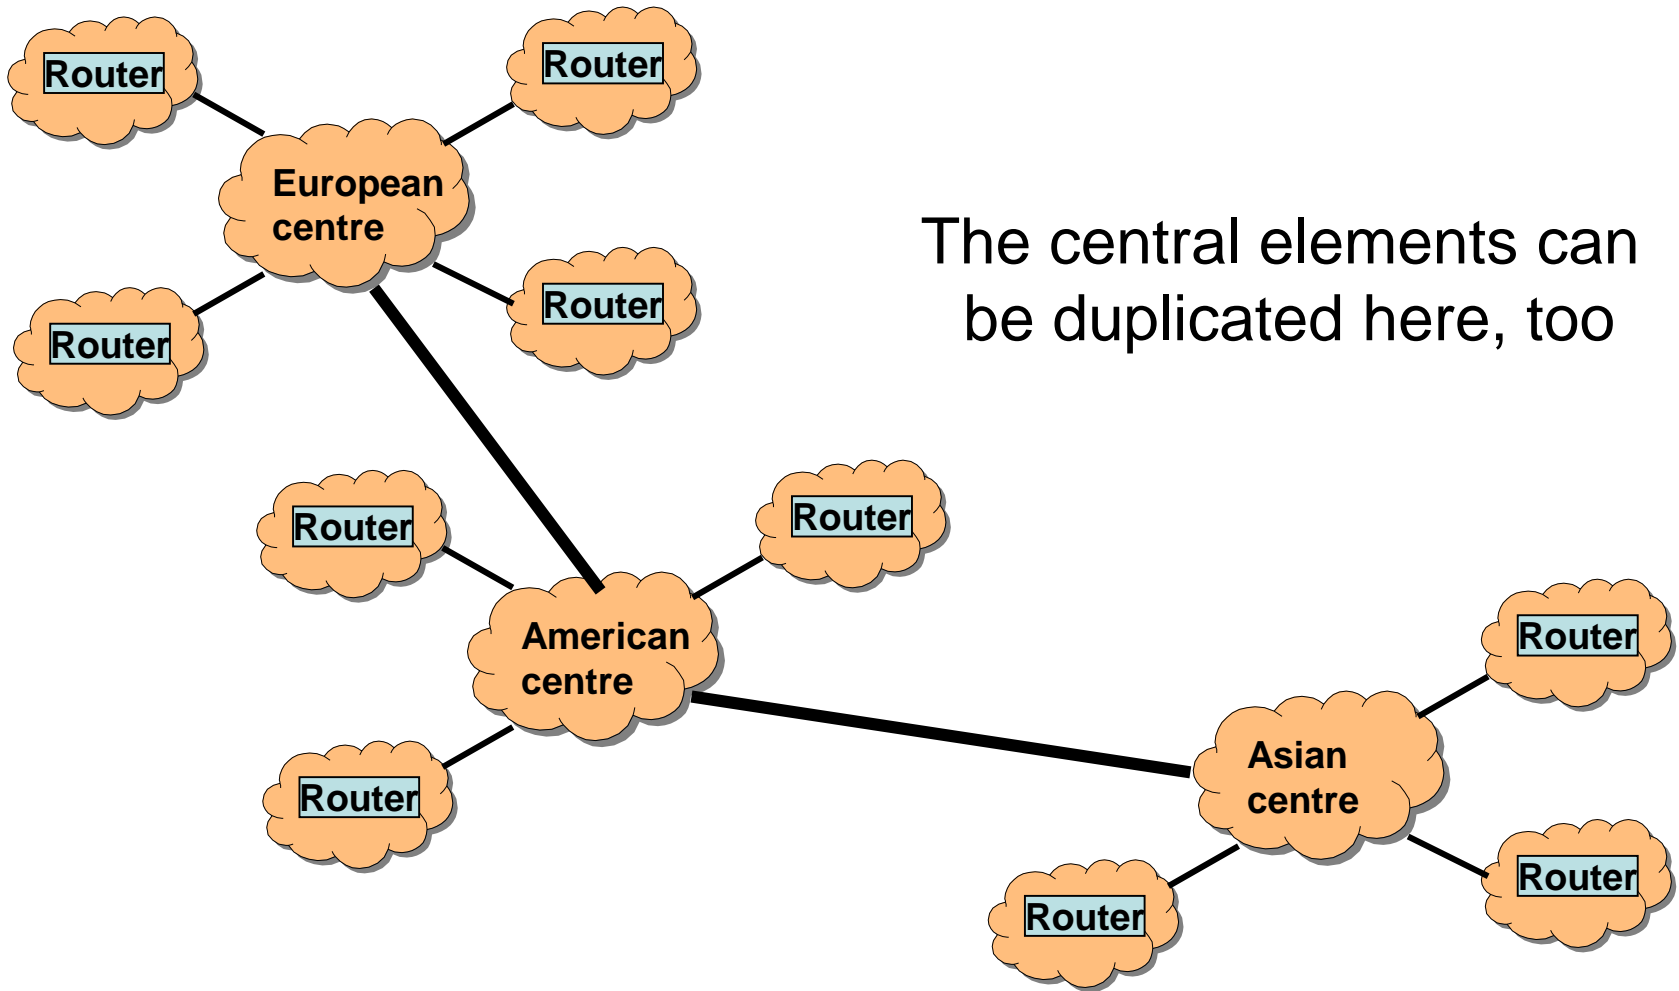


# DECENTRALISED (DISTRIBUTED) NETWORKS

- Chain
  - In case of error: two separated parts
- Ring
  - In case of error: becomes a chain
- Looped
  - Between (certain) nodes two connections
- Full mesh
  - Every node with every other
  - Most reliable but most expensive
    - $n*(n-1)/2$  connections





# VIRTUAL PRIVATE NETWORK

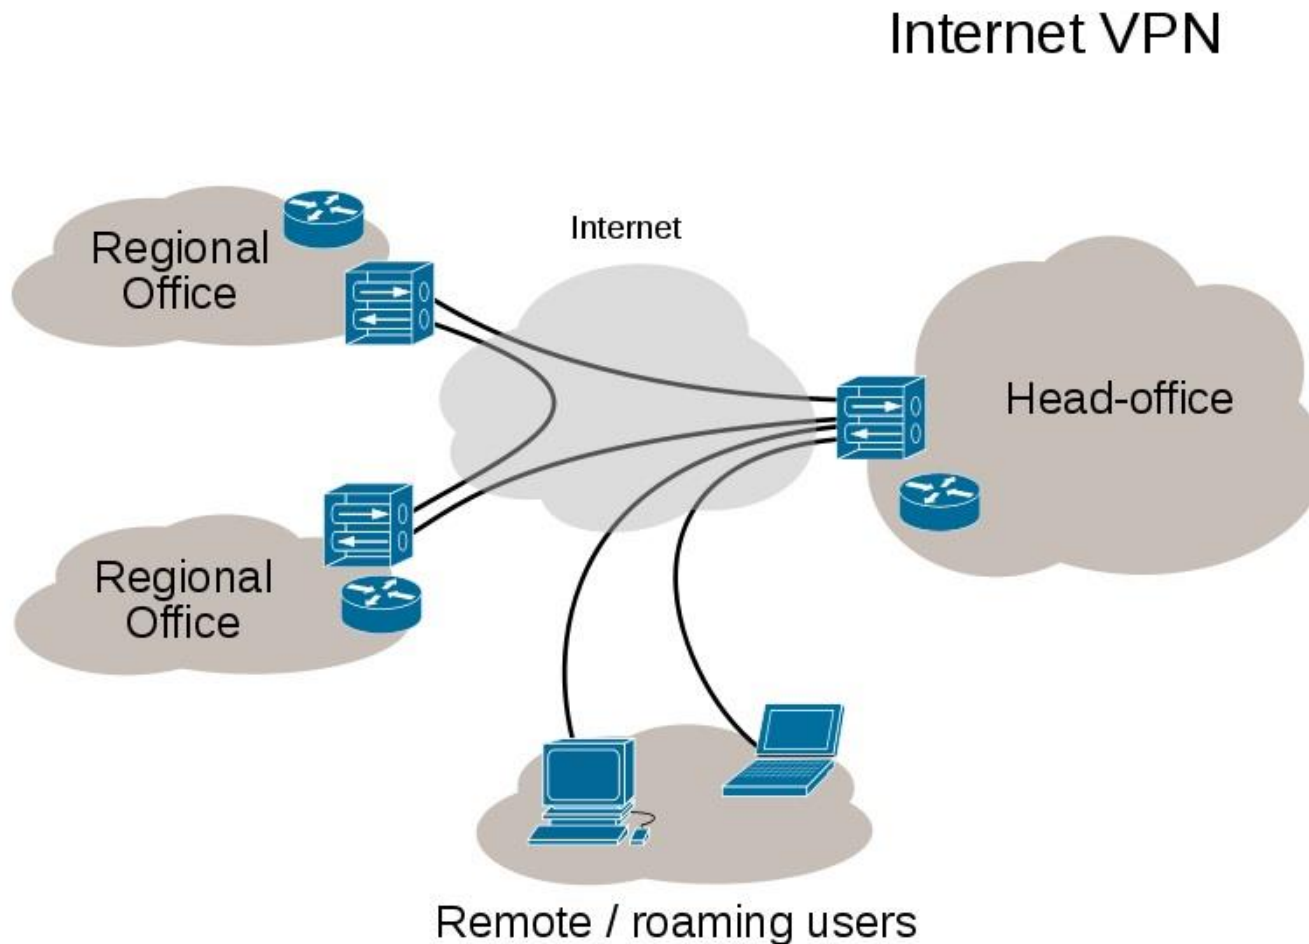

- Transmitting data through Internet
  - Not secure
- Leased line
  - Expensive
- VPN
  - Encryption, tunneling



# VPN BENEFITS

- Extended connections across multiple geographic locations without using a leased line
- Improved security for exchanging data
- Flexibility for remote offices and employees to use the intranet over an existing Internet connection as if they're directly connected to the network
- Savings in time and expense for employees to commute if they work from virtual workplaces
- Improved productivity for remote employees




# VPN FEATURES

- Security
  - VPN protects data on public network: intruders unable to read or use it
- Reliability
  - Employees/Remote Offices able to connect to VPN at any time
  - VPN provides the same quality of connection for each user even at maximum number of simultaneous connections
- Scalability
  - As a business grows possible to extend without replacing the VPN technology




# REMOTE-ACCESS VPN

- Connects users
  - Network Access Server (Media Gateway, Remote-Access Server)
  - Client software

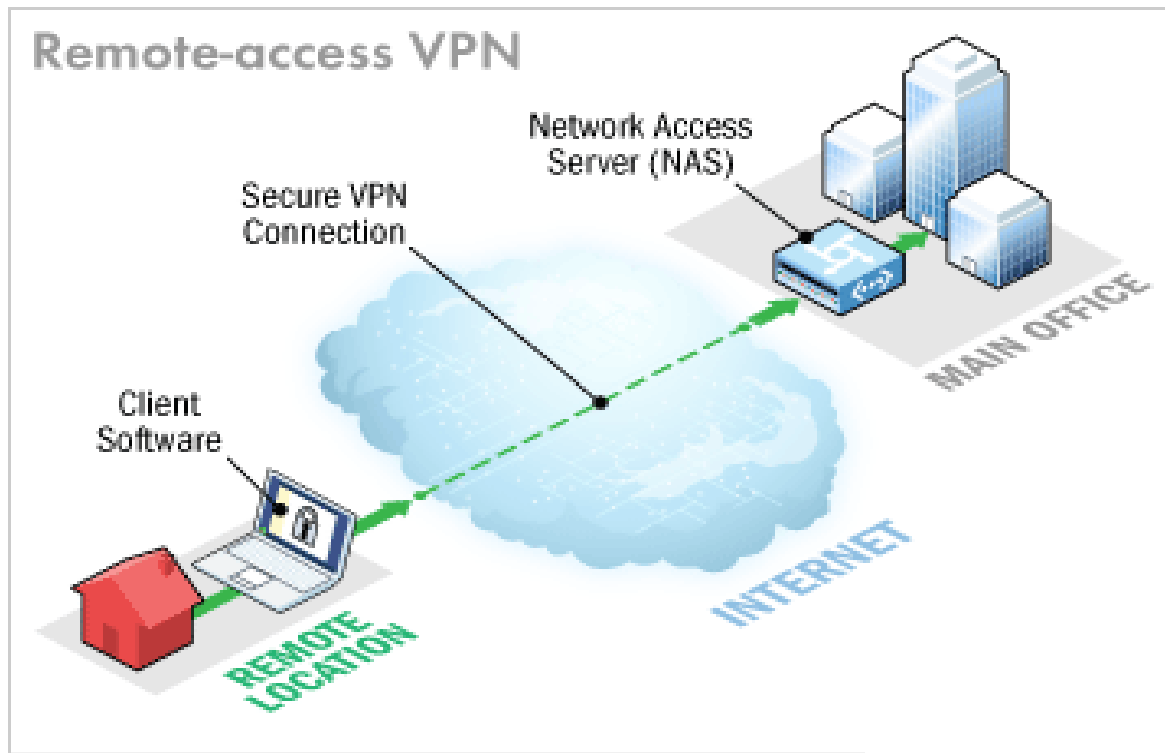

# SITE-TO-SITE VPN

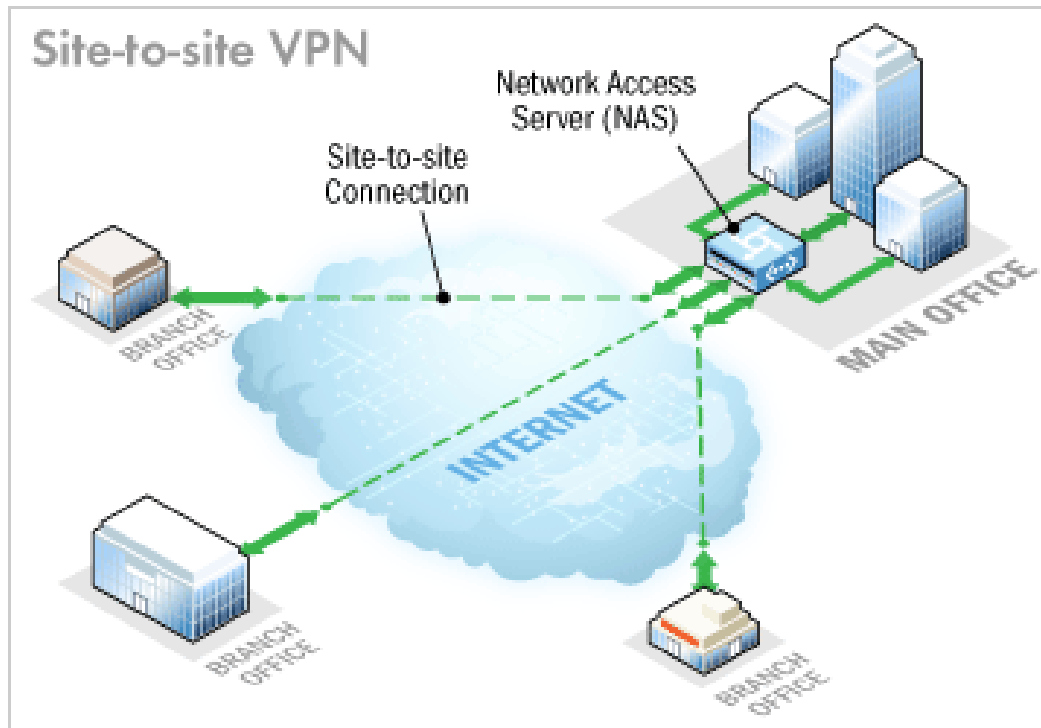

- Multiple fixed locations
  - Intranet-based
  - Extranet-based
- No need for a client software
- VPN Concentrators
  - (NAS)



# VPN CONCENTRATOR

- Network Access Server
  - Router with VPN tunneling capability
  - Sets up and maintains each tunnel in a remote-access VPN
  - Ensures end-to-end delivery of data
  - Encapsulation (tunneling)
    - Packs user data into an other packet
    - Adds an additional Control header
  - Encryption
    - IPSec
      - Site-to-site
    - SSL
      - Remote access



# VPN CONCENTRATOR

- Firewall
  - What type of traffic can pass through from the Internet onto a LAN and on what TCP and UDP ports
- AAA Server
  - Confirms who you are (authentication)
  - Identifies what you're allowed to access over the connection (authorization)
  - Tracks what you do while you're logged in (accounting)




# PHYSICAL AND LOGICAL NETWORK MAPS

- Physical:
  - Routes, numbers, types (coaxial, fibre optic) of cables, exact places of endpoints
  - Redundancy (if exists): exact identification of substitutional lines
- Logical:
  - Logical network topology: network identifiers (numbers, names), speeds
  - Routing protocols used
  - Administrative domains
- Importance of labeling
- Both logical and physical maps must indicate the boundaries of the network
  - Logical and physical connections to other networks





# LOGICAL NETWORK MAP

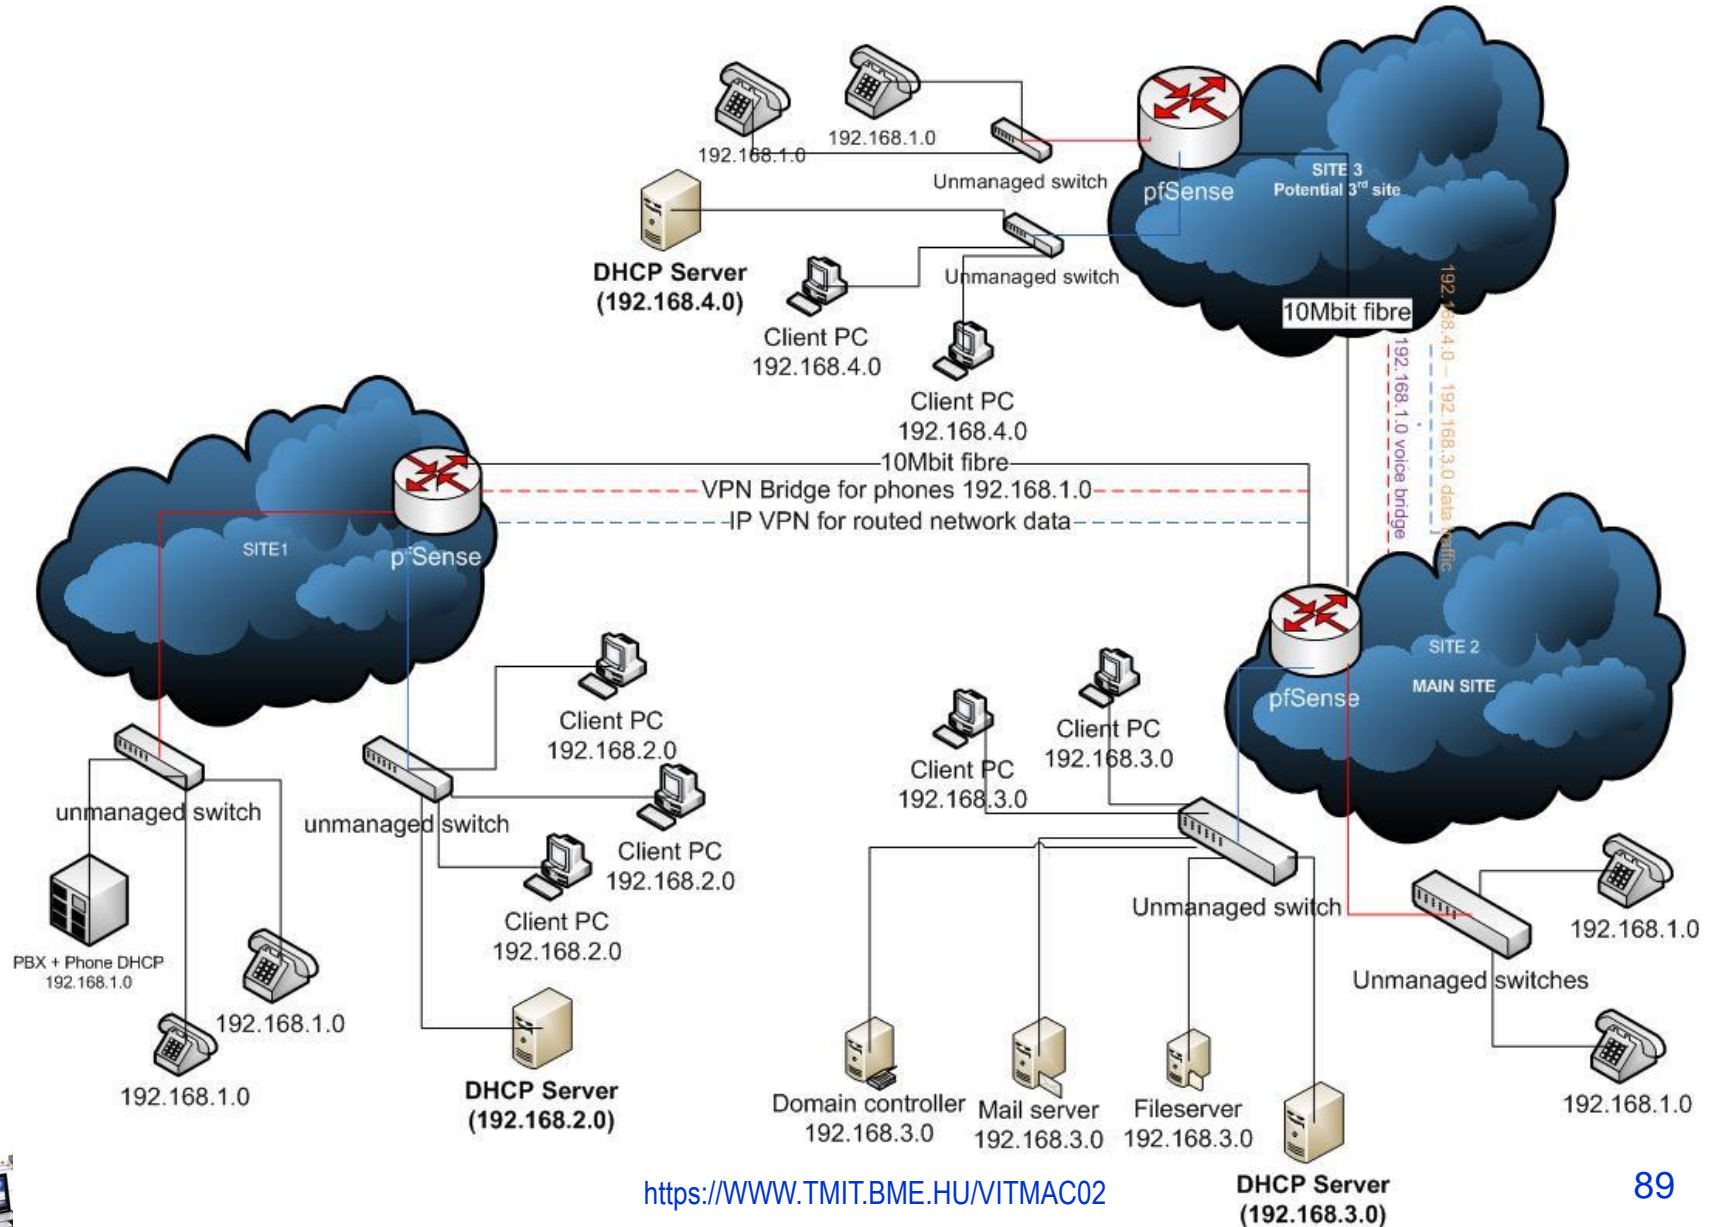


# LOGICAL TOPOLOGY

- Network map
- 3rd and above layer devices (router)
- Every sub-network managed by a 2nd layer unit (switch) is a unit („cloud”)
- Sizing (capacity, speed) is determined typically on the basis of the logical topology
  - Routing plan must harmonize with it




# TYPICAL LOGICAL TOPOLOGIES

- Flat topology
  - 3rd layer equipments (router) only at boundaries
  - Every device in the same IP address space („broadcast domain”)

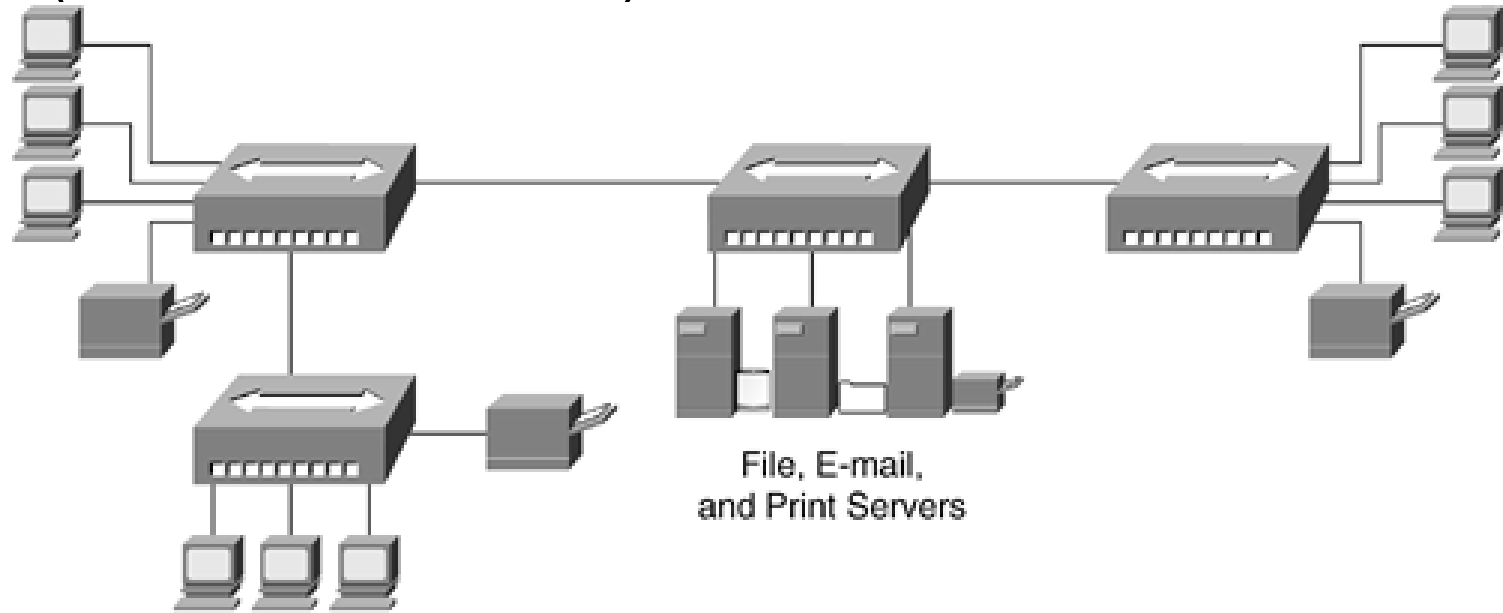

# TYPICAL LOGICAL TOPOLOGIES

- Location-based topology
  - One-one sub-network at every floor (with own IP address space)

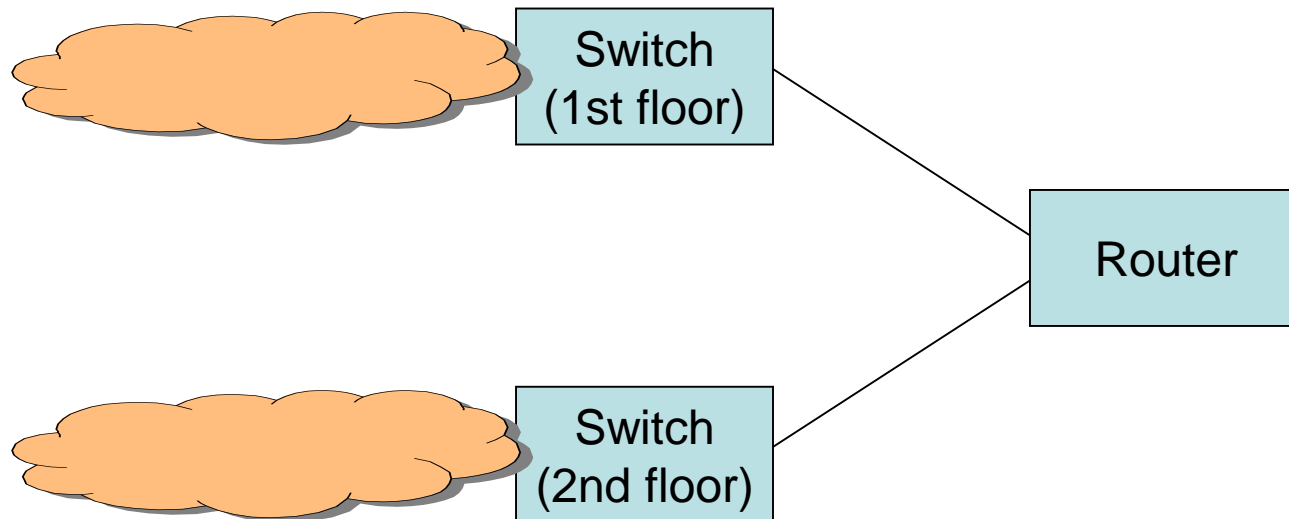

# TYPICAL LOGICAL TOPOLOGIES

- Functional-group based topology
  - Flat networks according to logical groups, independently from physical location (sales, engineers, managers, marketing)
  - Services (print, file- and nameserver, authentication) typically by groups
  - Sub-networks are connected to the main network by 3rd layer equipments (router)



# DEMARCATION POINTS

- Definition:
  - Demarcation point is the boundary between the organization and a utility (telephone, network provider, etc.) company
- Responsibility (errors, cabling, etc.):
  - To demarcation point – utility company
  - From demarcation point – organization
- Advisable properly labeling the demarcation points – to be able to show at any time to the technicians of the utility company

