


Networking Technologies and Applications

Rolland Vida
BME TMIT

September 9, 2016




Dial-up access

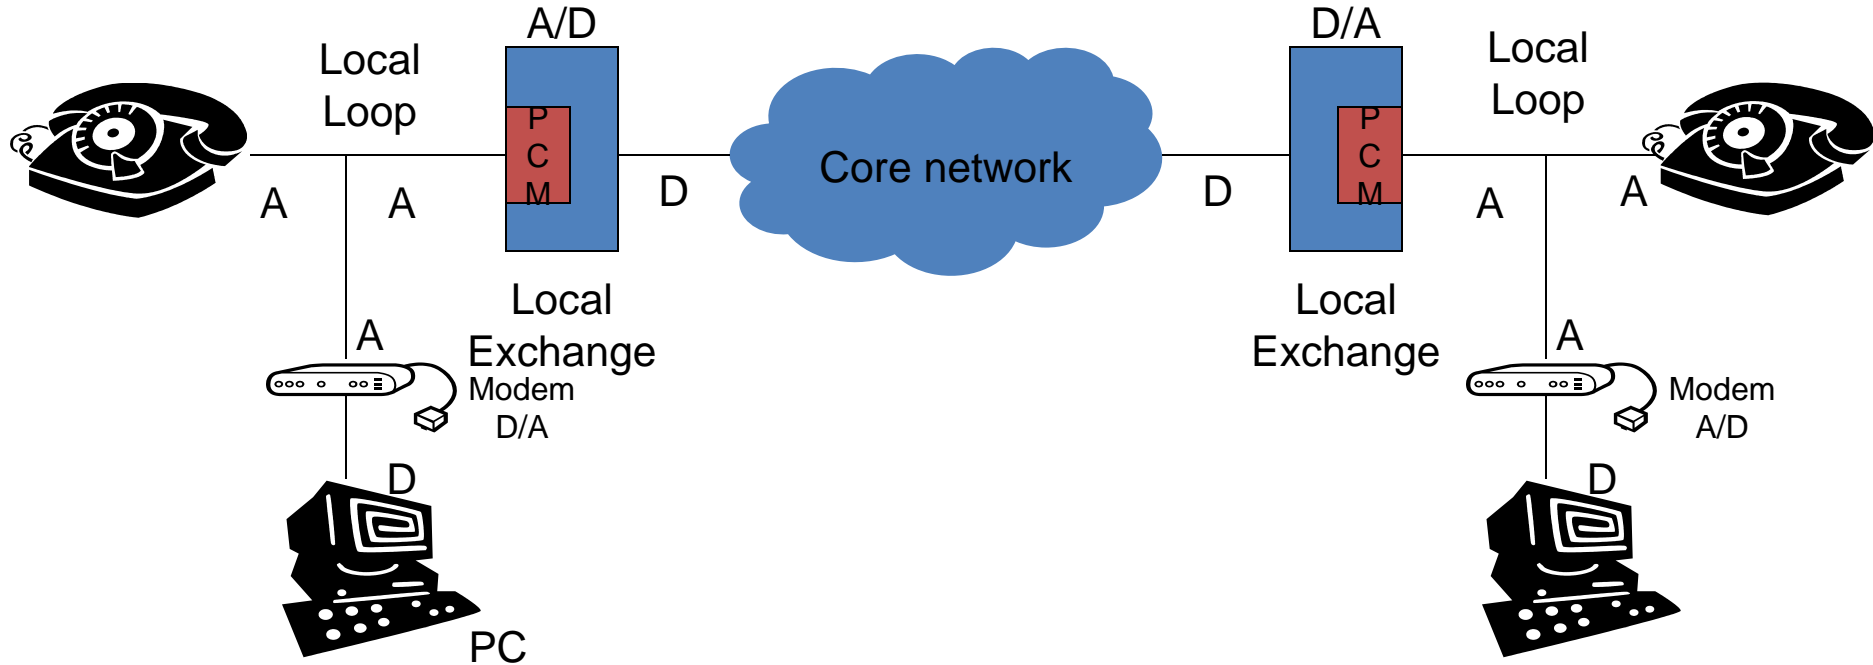

What's the limit?

- The core network is digital
 - After the PCM coding, the signal is restricted to a 64 Kbps channel, this is the upper limit
 - In most of the systems 1 bit/byte for signaling
 - Max. 56Kbps
 - Quantization noise due to the A/D and D/A conversions
 - The actual limit is 33.6 Kbps

Dial-up is dying out...?

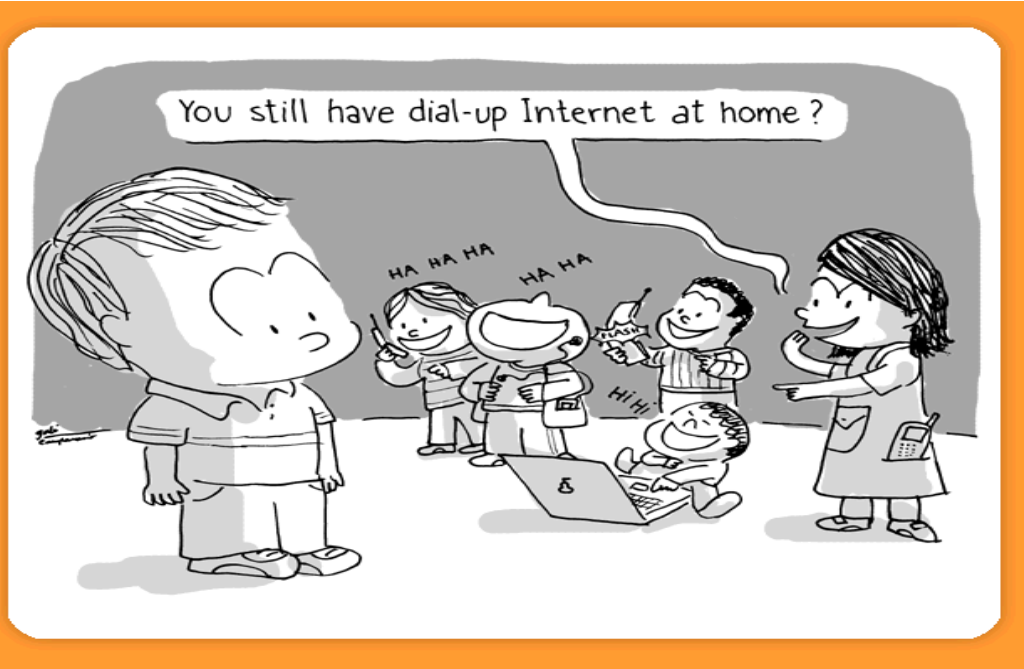

Why DSL?

- DSL – Digital Subscriber Line
- Dial-up speed – 56 Kbps
 - Cable modem – 10Mbps on shared cables
 - Wireless technologies – up to 50 Mbps
 - Obligated to move, if you want to keep the subscribers
- Emerges the **broadband** connectivity
 - Mostly a marketing term
 - Not clear what broadband means
- **xDSL** – different DSL versions

Why is DSL fast?

- Why is dial-up slow?
 - The PSTN network optimized for voice transmission
 - A band-pass filter in the local exchange
 - Only the 4 KHz large voice channel remains
 - Data is also restricted to this channel
- The line of the xDSL subscriber has no filter
 - You can use the entire capacity of the local loop
 - It depends on the length of the loop, the thickness and the quality of the cable
 - Optimal case: new cables, thin bundles, short loop
- If you want higher speed, you need many local exchanges
 - If someone lives far away, he should move closer
 - Lower the speed, higher the service range – more potential subscribers
 - Lower the speed, fewer interested subscribers


ADSL - Asymmetric Digital Subscriber Line

- Two competing and incompatible modulation schemes
 - DMT – Discrete Multitone Modulation - deployed today
 - CAP – Carrierless Amplitude Phase Modulation - not used since 1996
- DMT
 - 1.1 MHz frequency domain
 - 256 channels, 4.3125kHz each
 - Channel 0 – POTS (voice)
 - Channels 1-5 – guard band (empty)
 - To avoid interferences between voice and data channels
 - 1 upstream and 1 downstream channel for signaling
 - The remaining channels split between upstream and downstream user data
- Frequency allocation in ADSL
 - 0-4 kHz – voice
 - 4-25 kHz – guard band
 - 25-160 kHz – upstream band
 - 200 kHz - 1.1 MHz – downstream band

ADSL architecture

- **At the operator**
 - POTS Splitter
 - Frequency splitter to separate voice and data traffic
 - Voice is directed to the local exchange
 - Everything above 26 KHz is directed to the DSLAM
 - DSLAM – DSL Access Multiplexer
 - Splits the bit stream into packets and sends them to the ISPs network
- **At the subscriber**
 - POTS Splitter
 - ADSL modem
 - Digital signal processing
 - High speed connection to the PC
 - Ethernet cable and card
 - Sometimes USB connection
 - Internal ADSL modems

ADSL architecture

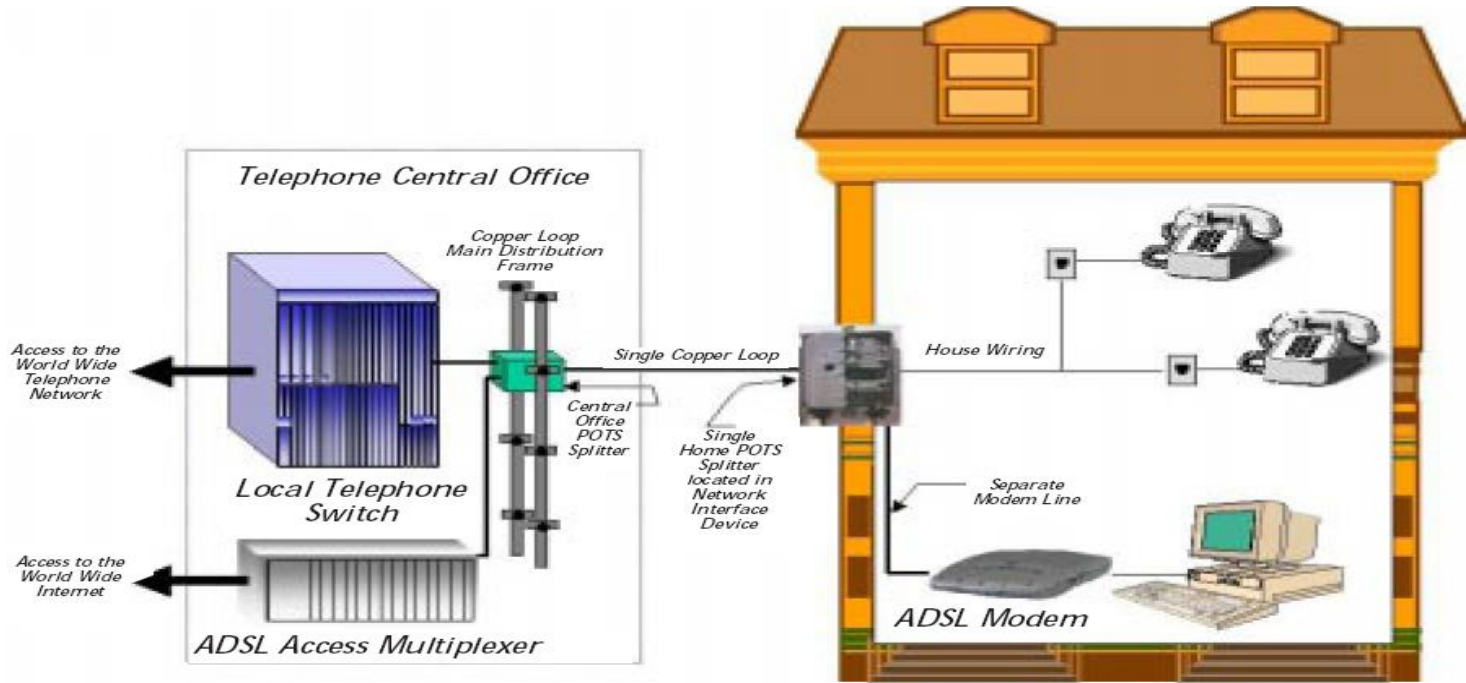

ADSL G.dmt



- ITU-T G.992.1 standard (1999)
 - <http://www.itu.int/rec/recommendation.asp?type=folders&lang=e&parent=T-REC-G.992.1>
- Much larger bandwidth for downstream traffic than for upstream
 - Designed for the needs of web browsing
 - Maximal downlink speed 8 Mbit/s
 - usually 512 Kbit/s – 1 Mbit/s
 - Maximal uplink speed 1 Mbit/s
 - usually 64 Kbit/s – 256 Kbit/s
- Service range of max. 3 km from the local exchange

ADSL G.dmt 2

- ITU-T G.992.3 standard (2002)
- Extends the traditional ADSL technology
 - Maximum downlink speed increased to 12 Mbit/s
 - Service range extended with ~ 500 meters
 - The improvements mainly due to the limitation of the interferences on long loops
- ADSL2 is energy efficient
 - As opposed to ADSL, it differentiates between periods with or without traffic
- ADSL2 can temporarily switch to „complete digital” mode
 - The voice and guard channels used for data traffic


ADSL G.dmt 2

- Seamless rate adaptation (SRA)
 - 20-25 twisted pairs in a bundler
 - „Crosstalk” from the neighboring pairs
 - Might lead to the ADSL connection being dropped
 - ADSL2 can adapt the speed
 - If too much noise on a channel, it can be blocked
 - The modem and the DSLAM agree on which channels to use

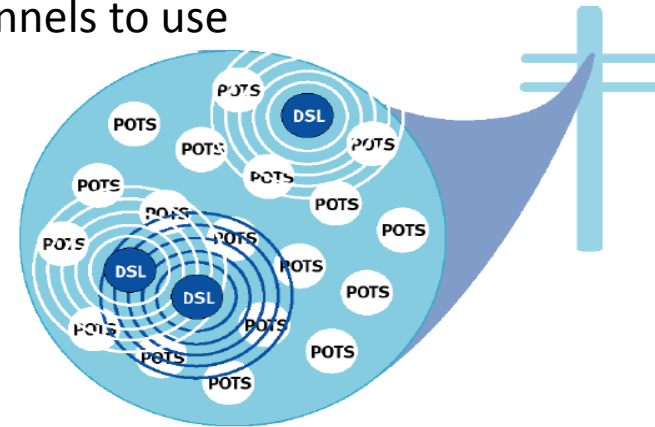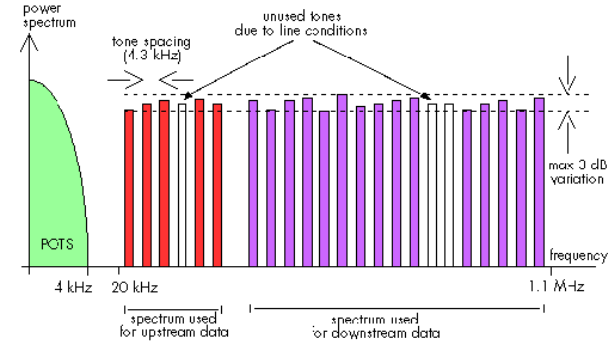

ADSL 2+

- ITU-T G.992.5 (2003)
- Bandwidth is increased by enlarging the frequency domain
 - The frequencies used for voice and upstream traffic do not change
 - The upper frequency of the downlink channel is increased from 1.1 to 2.2 MHz.
 - The maximum downlink speed increases from 8Mbit/s to 16 Mbit/s
 - The service range is lowered to 1.5 km

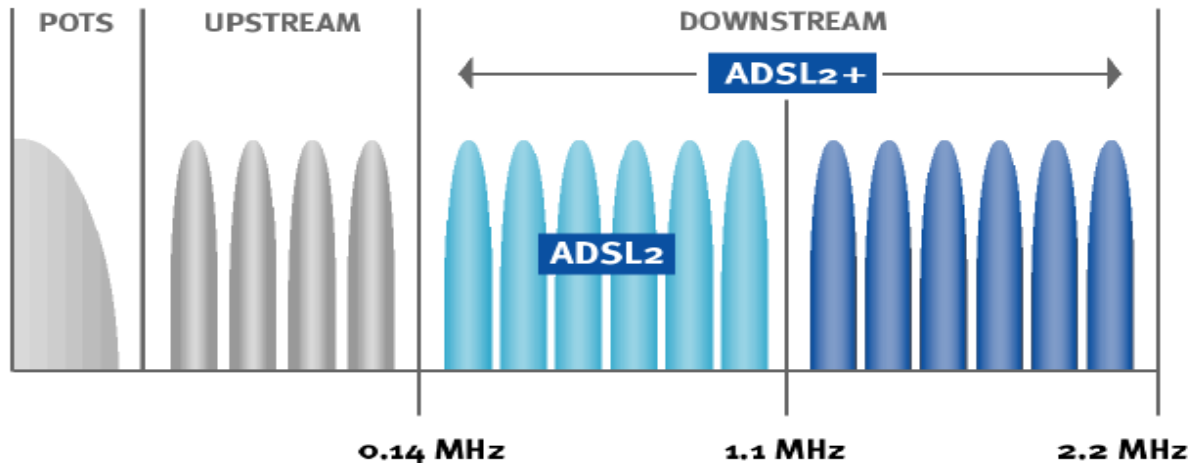

G.SHDSL

- Symmetric High-speed DSL
 - ITU-T G.991.2 (2001)
- 2.3 Mbit/s maximum speed in both directions
 - If a second twisted pair is added, it can be extended to 4.6 Mbit/s
 - service range of 3 km
 - As distance increases, the transmission quality is gradually decreasing

SHDSL applications for business

- **Web hosting**
 - If a web server is operated over a DSL connection
 - High upstream bandwidth needed
- **Videoconferencing**
 - Text, voice and video data to be transmitted
 - Symmetric traffic
- **VPN (Virtual Private Network) services**
 - Private network over a public telecommunication infrastructure
 - The privacy of the data transfer ensured through tunneling and encryption
 - VPN connections over SHDSL, linking the remote offices of a company, if there is no FTTx solution, or it is too expensive
- **Remote LAN Access**
 - Teleworking or SOHO (Small Office Home Office)
 - High speeds needed to ensure the same user experience as in the real office


SHDSL applications at home

- **Internet Gaming**
 - The home user operates a game server, or plays against other home users
 - A good upstream connections is essential
- **Residential Gateway Access**
 - A CPE (Customer Premises Equipment) that provides access to several services such as home video monitoring or intelligent home applications
- **Peer-to-peer applications**
 - File sharing, application layer multicast
 - Symmetric connection is needed

VDSL

- Very-high-data-rate digital subscriber line
 - ITU-T G.993.1 (2004)
- Significantly higher speeds on lower distances
 - 52 Mbit/s downstream, 16 Mbit/s upstream
 - Might be symmetric as well (26-26 Mbit/s)
 - 12 MHz bandwidth
 - Max. 1 km service range
 - Usually rather 300 m
- Mainly used to extend the optical access inside buildings
 - Optical cables are not recommended inside buildings, because of the many necessary inflections
 - The twisted copper pair (VDSL) is a good replacement

VDSL2

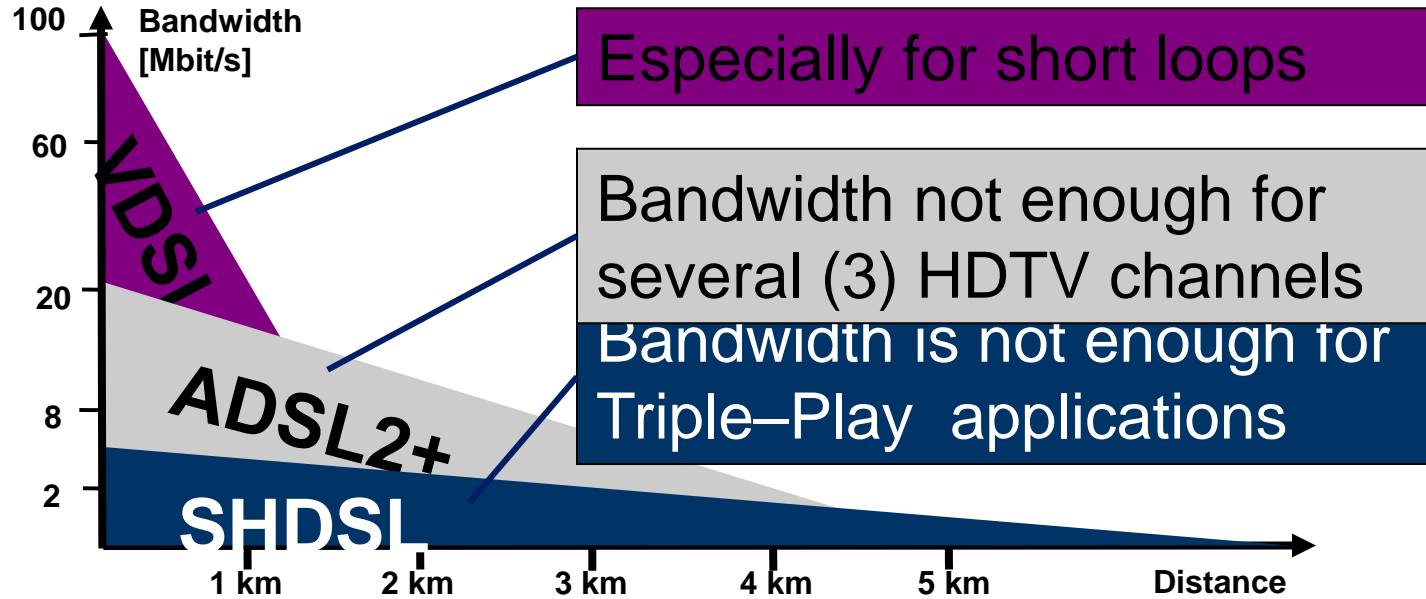


VDSL2 = VDSL speeds with ADSL/2+ service range

VDSL2

- ITU-T G.993.2 (2005)
 - 100 Mbit/s downstream and upstream
 - 30 MHz frequency domain
 - 3 km service range
 - High speed and large range are not compatible
- 8 specified profiles, different service levels
 - Different user expectations in different geographical areas
- ADSL-compatible (VDSL is not)
 - Easy to deploy, attractive technology for the service providers

ADSL compatibility

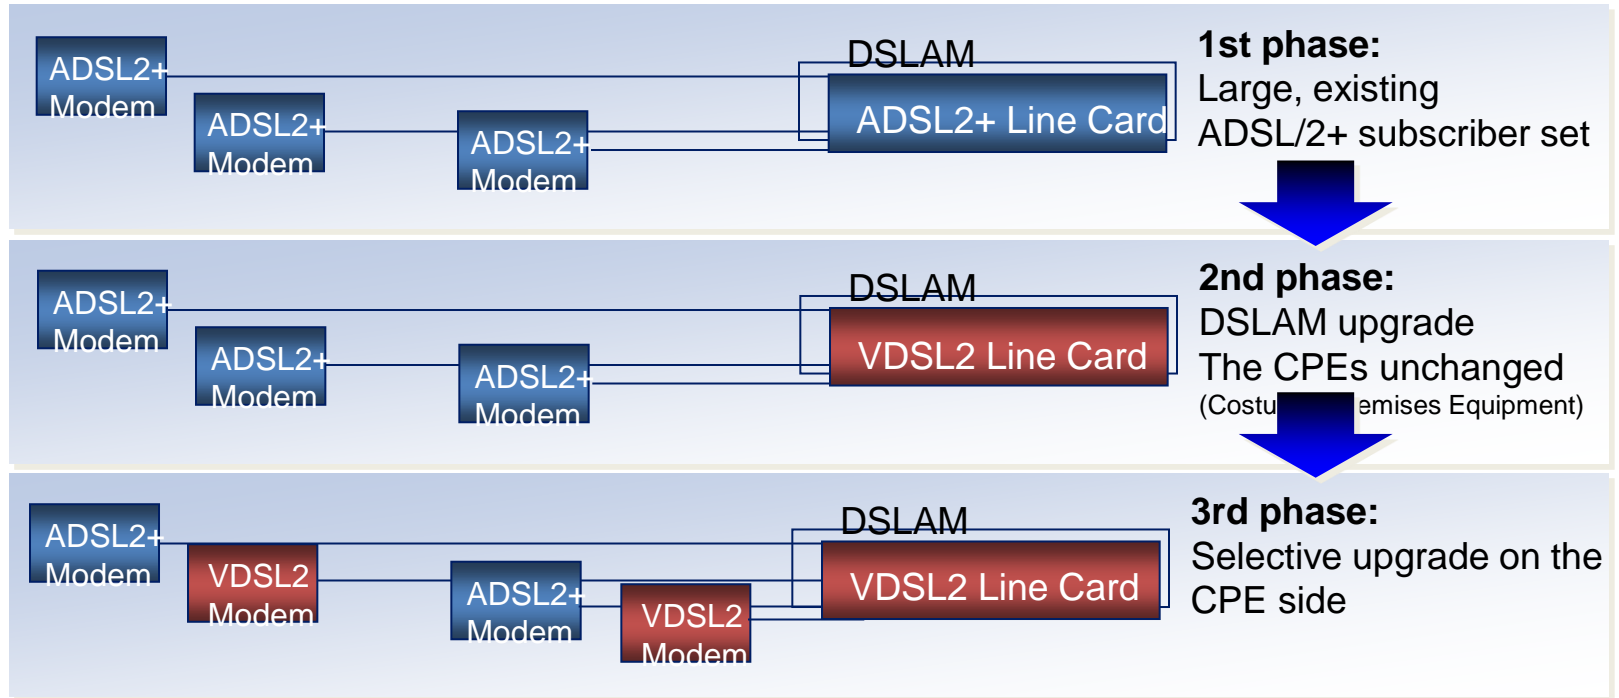

Triple Play

- **Triple Play**
 - marketing term for 3 parallel IP services:
 - internet
 - television
 - Video on Demand (VoD) or Live Streaming
 - MPEG 2, Set Top Box (STB)
 - telephony
 - Voice over IP (VoIP)
 - Rather a business model more than a technology standard
- **Quad(ruple) Play**
 - The same 3 services, over a wireless interface

VDSL2 QoS

- No Quality of Service support in VDSL
 - In VDSL2 yes
 - Necessary for triple-play services
- Applications have different requirements

Application	Sensible to delay	Sensible to packet loss
Data	/	Yes
Video	No	Yes
Voice	Yes	No
Gaming	Yes	Yes

- Voice
 - Delay – max. 150ms end-to-end
 - BER – between 10^{-5} and 10^{-2} , depending on the used codec
- Video
 - Delay – seconds! for VoD or streaming
 - Zapping delay
 - BER – from 10^{-7} (video telephony) to 10^{-13} for HDTV
 - High Definition Television

VDSL2 QoS

- Different traffic types
 - Voice
 - Small packets (100-400 byte/packet)
 - Generated with constant speed
 - Video
 - Large packets
 - Generated with changing speeds (bursty traffic)
- „dual path” - „dual latency” support in VDSL2
 - Specified bandwidth per traffic type
 - The bursty video does not affect the voice traffic

G.fast

- Proposed in 2014, to be deployed in 2016
- Speeds between 150 Mb/s and 1 Gb/s, for very short loops (100-200 m)
- **Time Division Duplexing (TDD)** instead of **Frequency Division Duplexing (FDD)** as in ADSL2 and VDSL2
 - FDD – separate frequencies for uplink and downlink
 - TDD – alternating time slots for uplink and downlink
 - Better usage of spectrum, possibility for energy saving
 - Discontinuous TDD, transmitter and receiver disabled for longer intervals than needed for the direction change.
 - Trade-of between throughput and power consumption

Other DSL solutions

- HDSL (*High bit-rate DSL*)
- IDSL (*ISDN DSL*)
- MSDSL (*Multirate Symmetric DSL*)
- RADSL (*Rate-Adaptive DSL*)

- No large-scale deployment