

Networking Technologies and Applications

Rolland Vida
BME TMIT

November 19, 2020




Link-state protocols

Operation of link-state protocols

- The operation of link-state protocols has two steps:
 1. Each node discovers the network topology
 - Link state records advertised in the network
 2. In the obtained graph it finds the shortest path and the next hop on the path
- **Important!**
 - The topology in each router should be the same
 - Finding the optimal path is done in the same way, in each node
 - If node A thinks the optimal route goes through B, and B thinks it goes through A
 - a loop is formed!



Link State Database

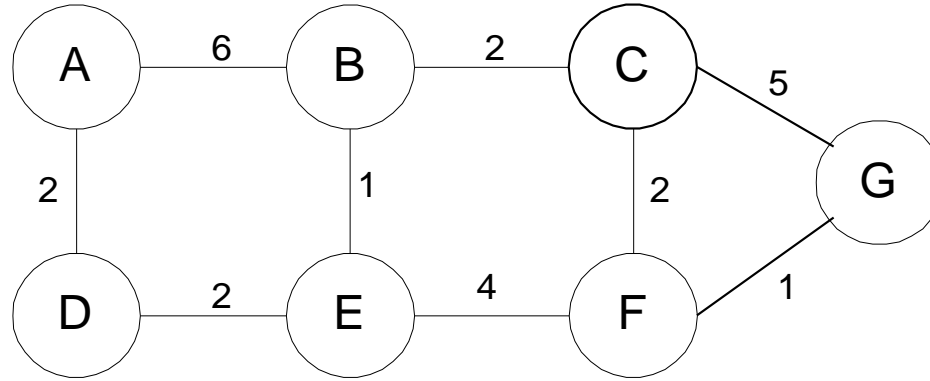

Link state Database						
A	B	C	D	E	F	G
B/6	A/6	B/2	A/2	B/1	C/2	C/5
D/2	C/2	F/2	E/2	D/2	E/4	F/1
	E/1	G/5		F/4		G/1



Dijkstra algorithm

- Route selection based on the Dijkstra algorithm
 - Let C be the root
 - Let's calculate the cost of the paths to our neighbors

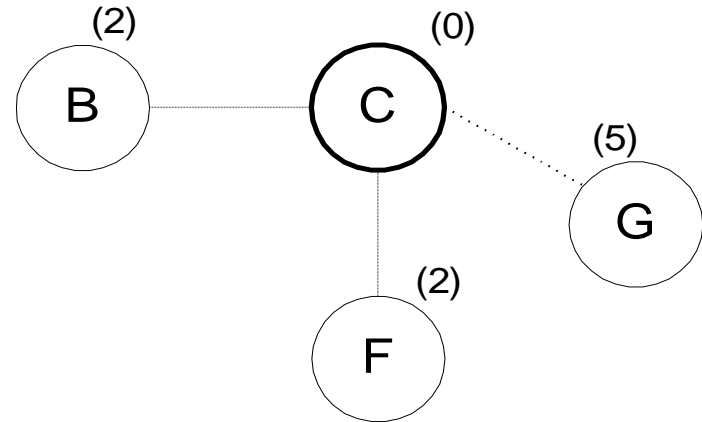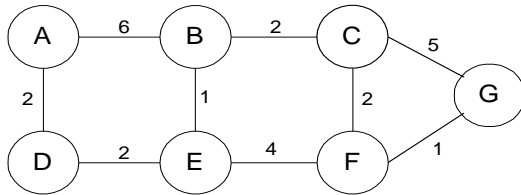



Dijkstra algorithm 2

- Let's consider node F (the smallest cost, non-visited neighbor) and calculate the costs of the paths to the neighbors of F
- Shorter path to G through F. Node E gets in the picture

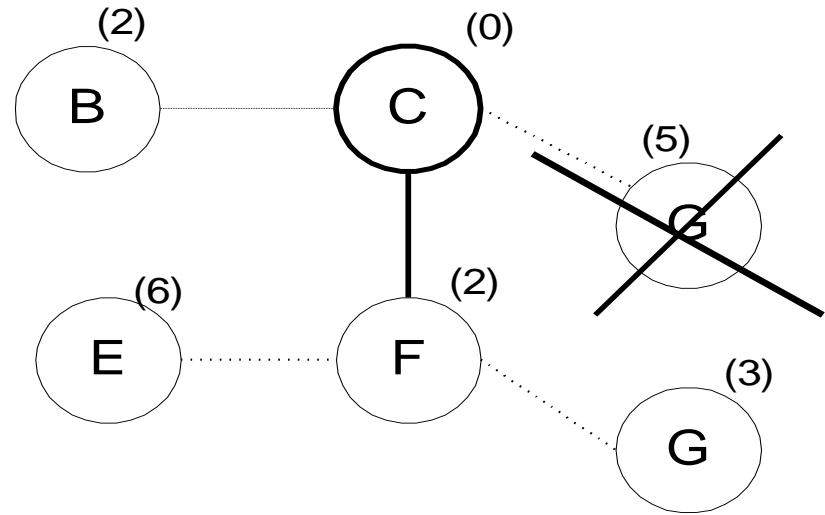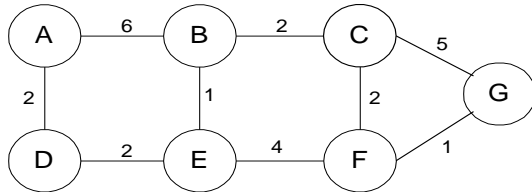



Dijkstra algorithm 3

- Let's consider node B, and calculate the costs to its neighbors
- Shorter path to E through B. Node A gets in the picture

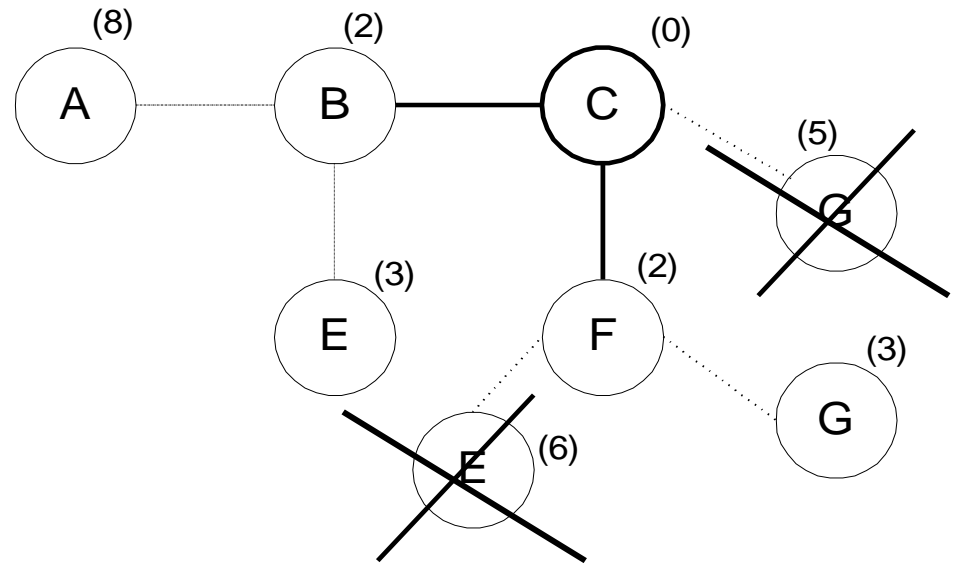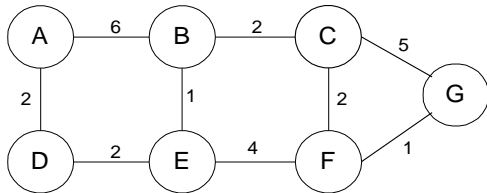



Dijkstra algorithm 4

- Let's consider node E, and calculate the costs to its neighbors
- No changes, node D gets in the picture

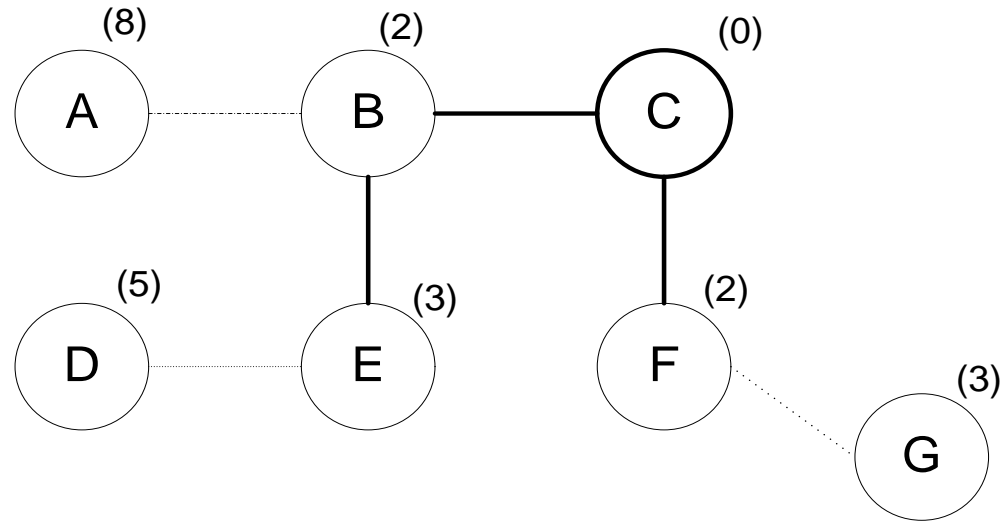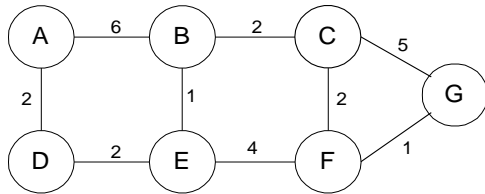



Dijkstra algorithm 5

- Consider node G, and calculate the costs
- No changes

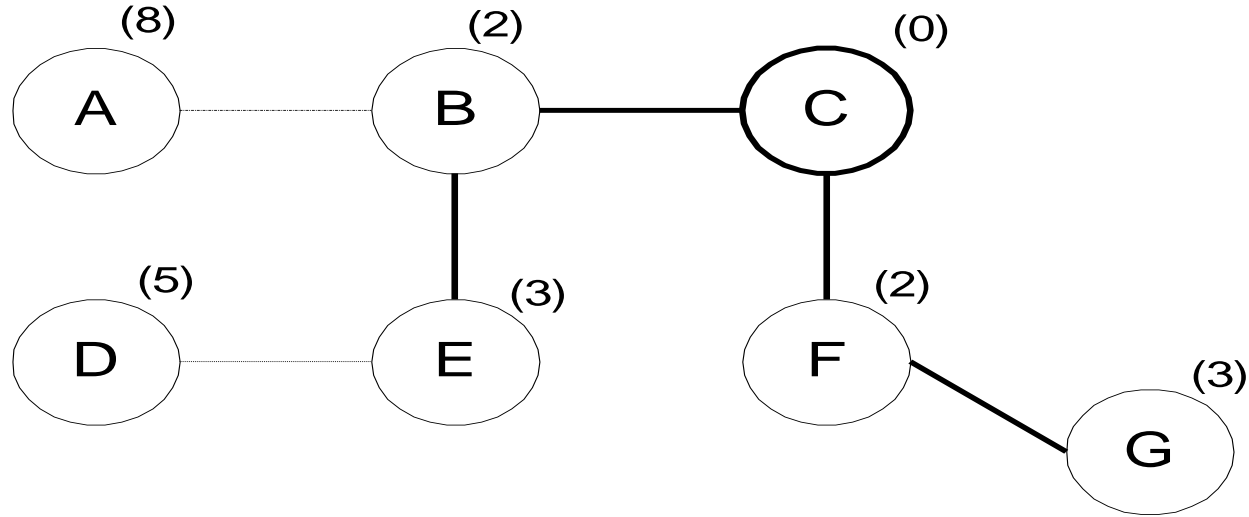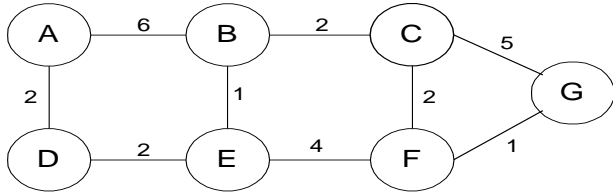



Dijkstra algorithm 6

- Consider node D, and calculate the costs to its neighbors
- Shorter path to node A!

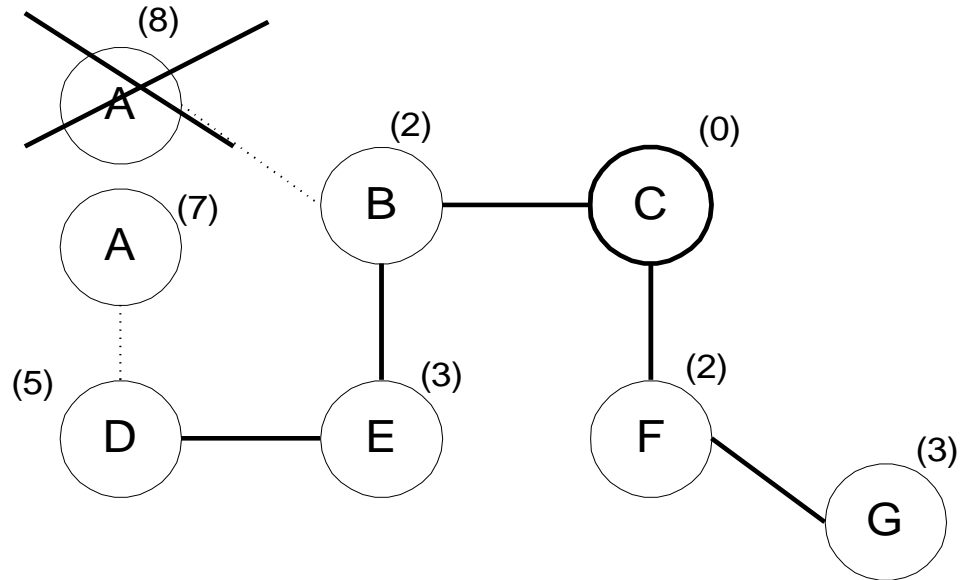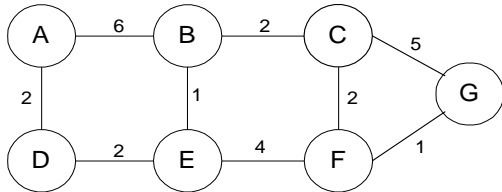


Dijkstra algorithm 7

- Consider node A, and calculate the costs
- No more neighbors
- End of story

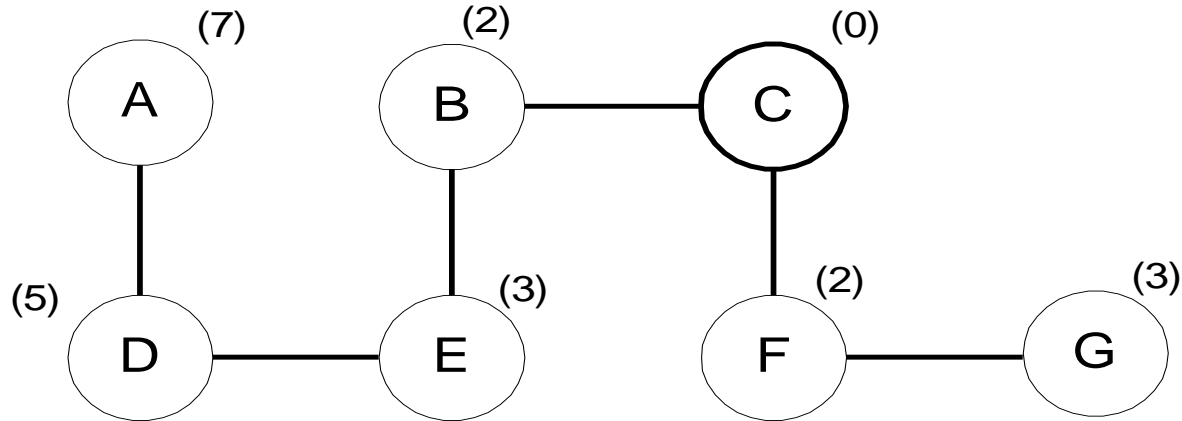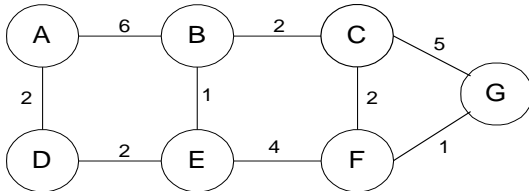

Consequences of a broken link

- Links A-B and D-E are broken
 - The network is partitioned
 - No update messages between the two partitions
- Nodes A and D consider the rest of the network unreachable
- After the link is re-established, the routers synchronize their databases
 - Topology update


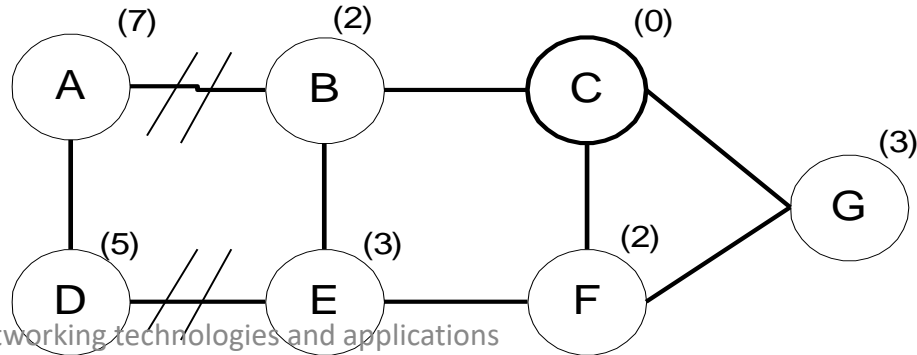


Link-state protocols

- OSPF – Open Shortest Path First
 - First standard – RFC 1131 ('89)
 - OSPFv2 – RFC 2178 ('97)
 - OSPFv3 – RFC 2740 ('99)
 - IPv6 version

2 level hierarchy

- An OSPF domain split into **areas**
 - For scalability reasons
- **LSA (Link State Advertisement)** advertised inside the areas only
- Aggregation between the areas
 - The changes inside an area not visible from outside
 - Special area – **Backbone area** (AreaID=0)

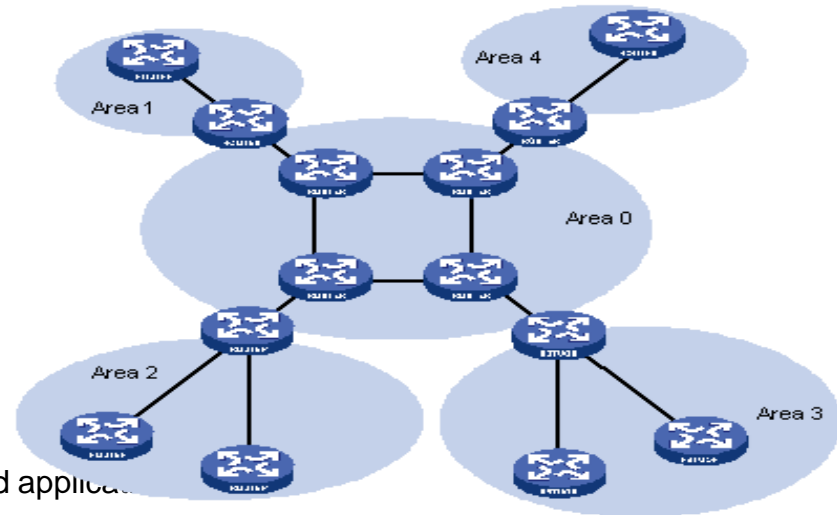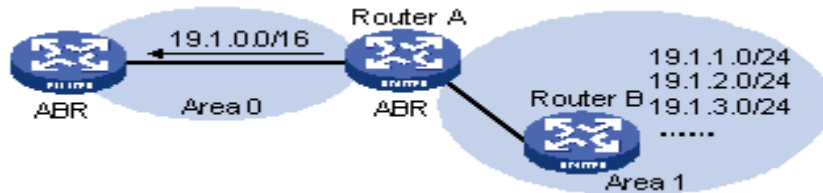

OSPF protocol operation


- Neighbor discovery
 - With the Hello protocol
- Choosing the Designated Router (DR) and Backup Designated Router (BDR)
 - Based on priorities
 - From 0 to 254
 - If priority set to 0, it will never be selected as DR or BDR
 - In case of equal priorities, the bigger Router ID wins
 - RID = the biggest configured loopback address on the router (127.x.x.x)
 - If no loopback address configured, RID = the biggest active interface address
 - If a higher priority router appears (is turned on) after the DR selection, it will not take over the DR role, until the DR and the BDR operate correctly
 - If the DR „dies”, the BDR takes over the role
 - New BDR is selected

OSPF protocol operation

- **Forming adjacencies**
 - Synchronizing the database and advertising the LSAs among the neighbors
 - The DR decreases the network traffic
 - The DR maintains a table about the entire network topology
 - Each router inside an area in a master-slave relation with the DR
 - Routers send updates to the 224.0.0.6 multicast address
 - All OSPF DR and BDR routers
 - The DR send the new table to the 224.0.0.5 multicast address
 - All OSPF routers



Autonomous system

- **AS – autonomous system**
 - Set of routers inside a domain that is technically supervised by one entity
 - One ISP, one administration
 - Some IGP (Interior Gateway Protocol) protocol inside the AS
 - E.g., RIP, OSPF
 - Some Exterior Gateway Protocol (EGP) for inter-AS routing
 - E.g. BGP-4

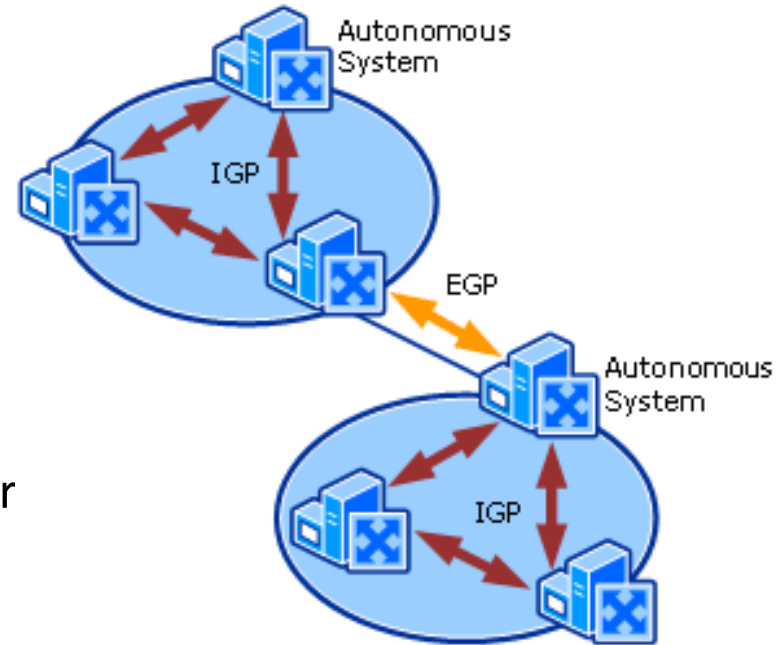


Internet topology

- Network of autonomous systems
 - Customer-provider relation
 - **Transit relation** – connecting to the global network
 - **Peering relation** - two equal rank ASs, between two equal rank providers
 - Not transitive

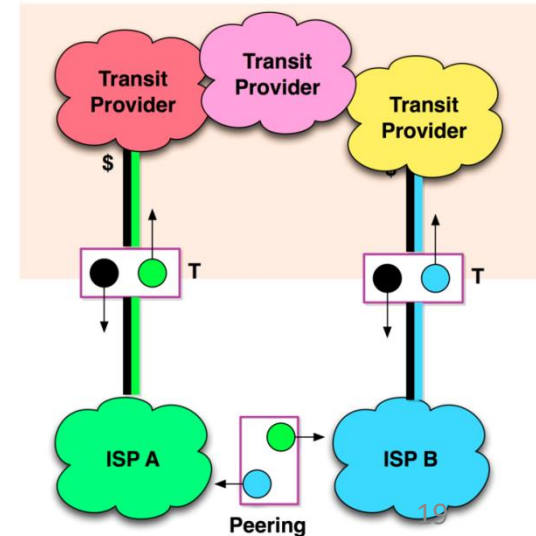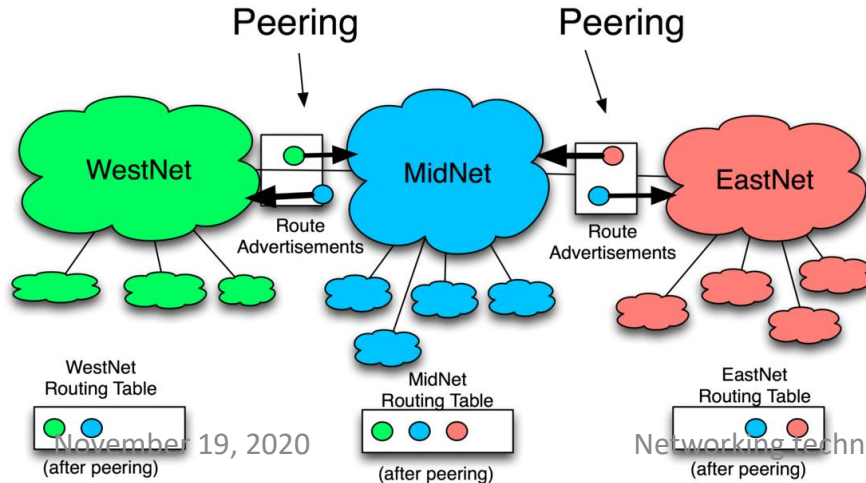


Tranzit vs. Peering

BIX2
(Budapest Internet Exchange)
210 Gbit/s (2014)

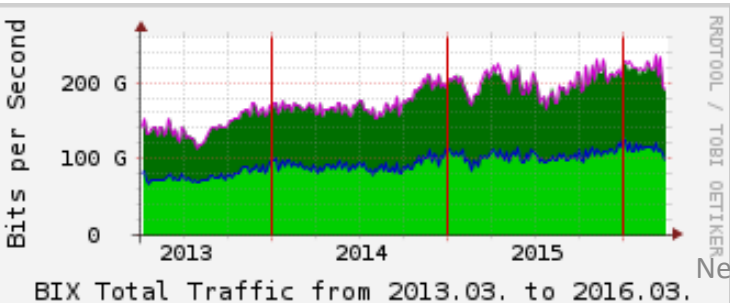

Costs of Peering

- 1) Transport
- 2) Colocation
- 3) Equipment
- 4) Peering Port Fees

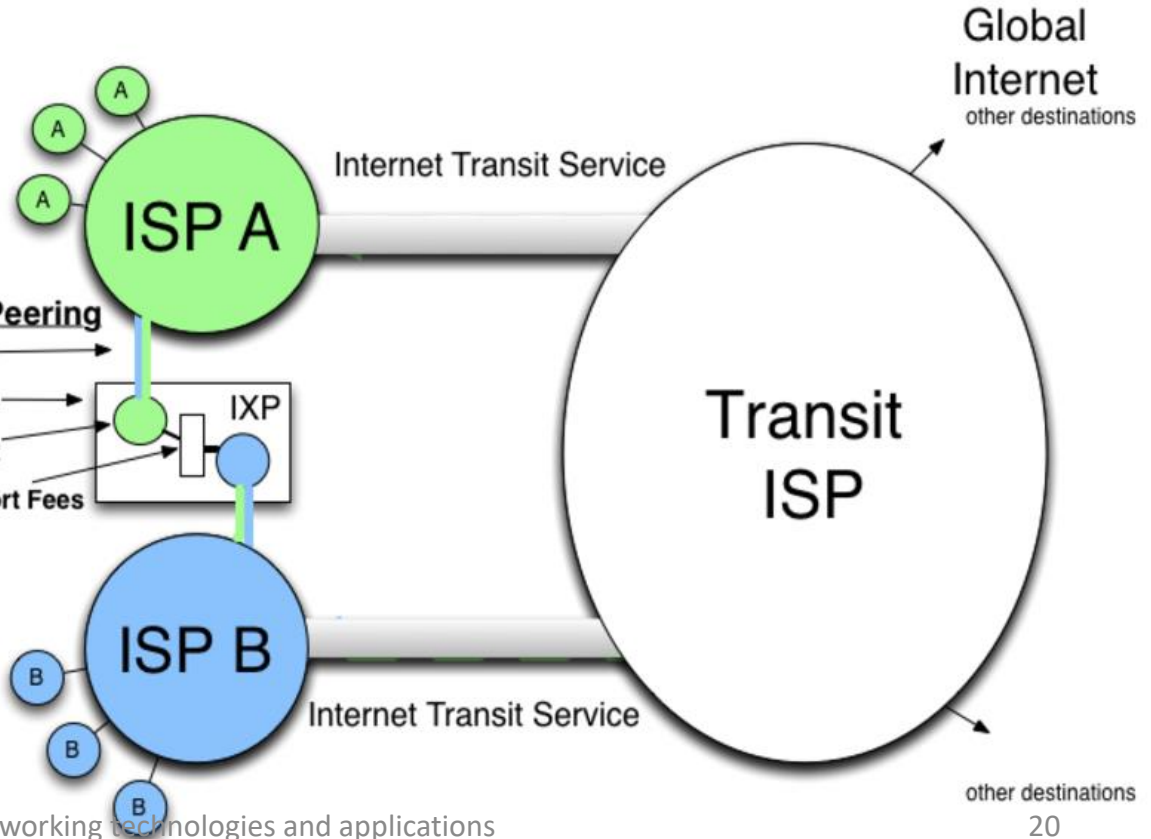

Internet topology

- Advantages of the IGP-EGP hierarchy
 - Scalability for large networks
 - Fewer prefixes to be sent
 - Faster convergence
 - Limits error propagation
 - Administrative autonomy
 - Inside each AS an IGP protocol of choice

IGP vs. EGP

- In IGP automatic neighbor discover
- In EGP specially configured peers


- In IGP you trust the routers
- In EGP you have limited trust in connections with other networks

- In IGP prefixes are distributed inside the entire network
- In EGP prefix distribution is administratively limited

- IGP connects routers of the same AS
- EGP connects the routers of different ASs

Border Gateway Protocol

- One of the main building blocks of the Internet
- BGP chronology
 - Initial standard – BGP – RFC 1105 ('89)
 - BGP-3 – RFC 1267 ('91)
 - BGP-4 – RFC 1771 ('95)
 - Last version – RFC 4271 ('06)
- **External BGP (eBGP)**
 - BGP connection with a neighbor router from a different AS
- **Internal BGP (iBGP)**
 - BGP connection with a neighbor router from the same AS

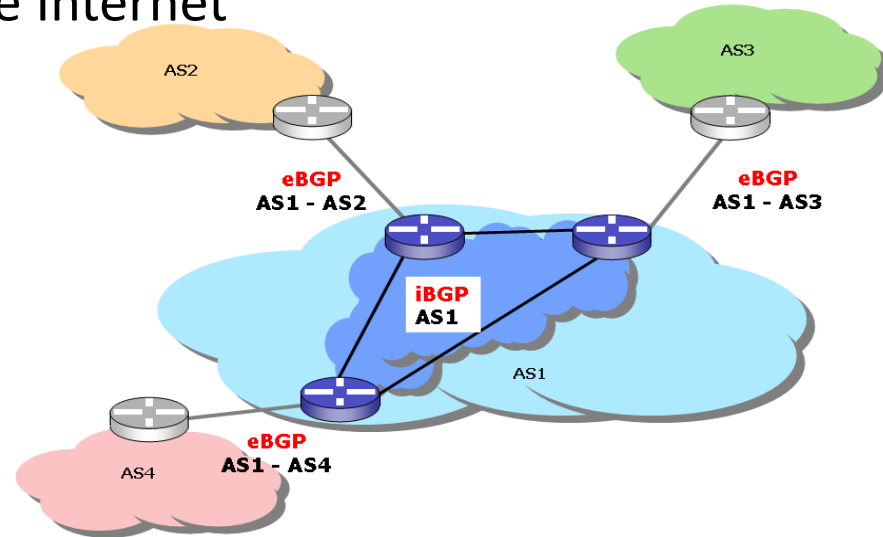


BGP properties


- **CIDR (Classless Inter-Domain Routing)** support
 - Variable length prefixes
 - Efficient address aggregation
- Manual neighbor configuration
 - No automatic discovery
- No periodic updates – hard state
 - Explicit UPDATE messages – NLRI records
 - Network Layer Reachability Information
 - (Destination prefix, AS path, next hop)
 - Loops can be avoided by listing the ASs
 - If a route becomes unavailable, it is also advertised explicitly

iBGP

- Distributes prefixes from eBGP neighbors
- iBGP nodes – full mesh
 - No iBGP routing
- Drawback – a full mesh is not scalable
 - If $n=1000$,
 $n(n-1)/2 = 499.500$
iBGP sessions

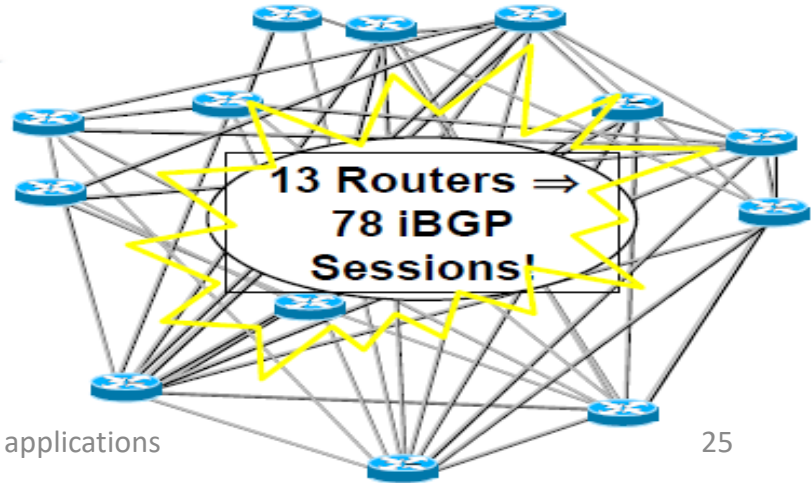

Route reflector

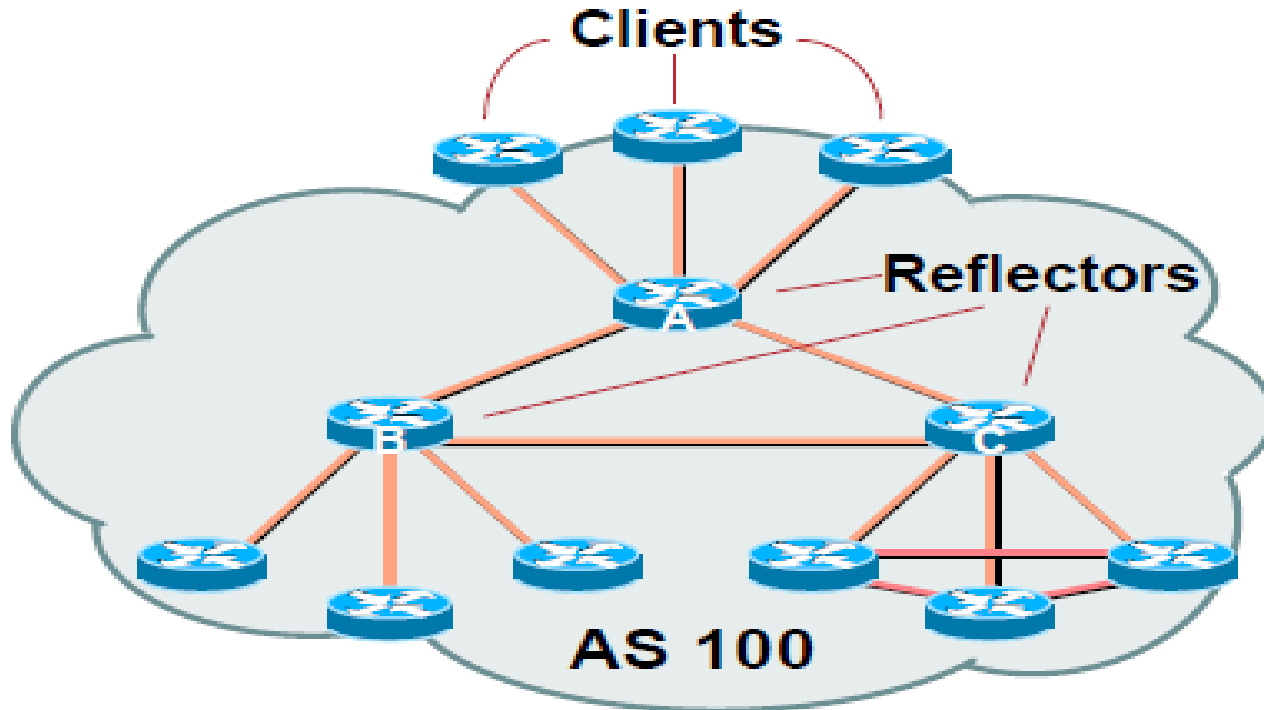

Route reflector redundancy

